

RATIONALE

UPDATE TO ASME Y14.5-2018. REVISE LEAD THREAD CHAMFER TO AS1132. REVISE LIGHTENING HOLE CONFIGURATION TO AS1132. REVISE FILLET RADIUS TO CR. ADD "COMPOSITION SIMILAR TO" TO NOTE 2.

REV.
E

AS3240™

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


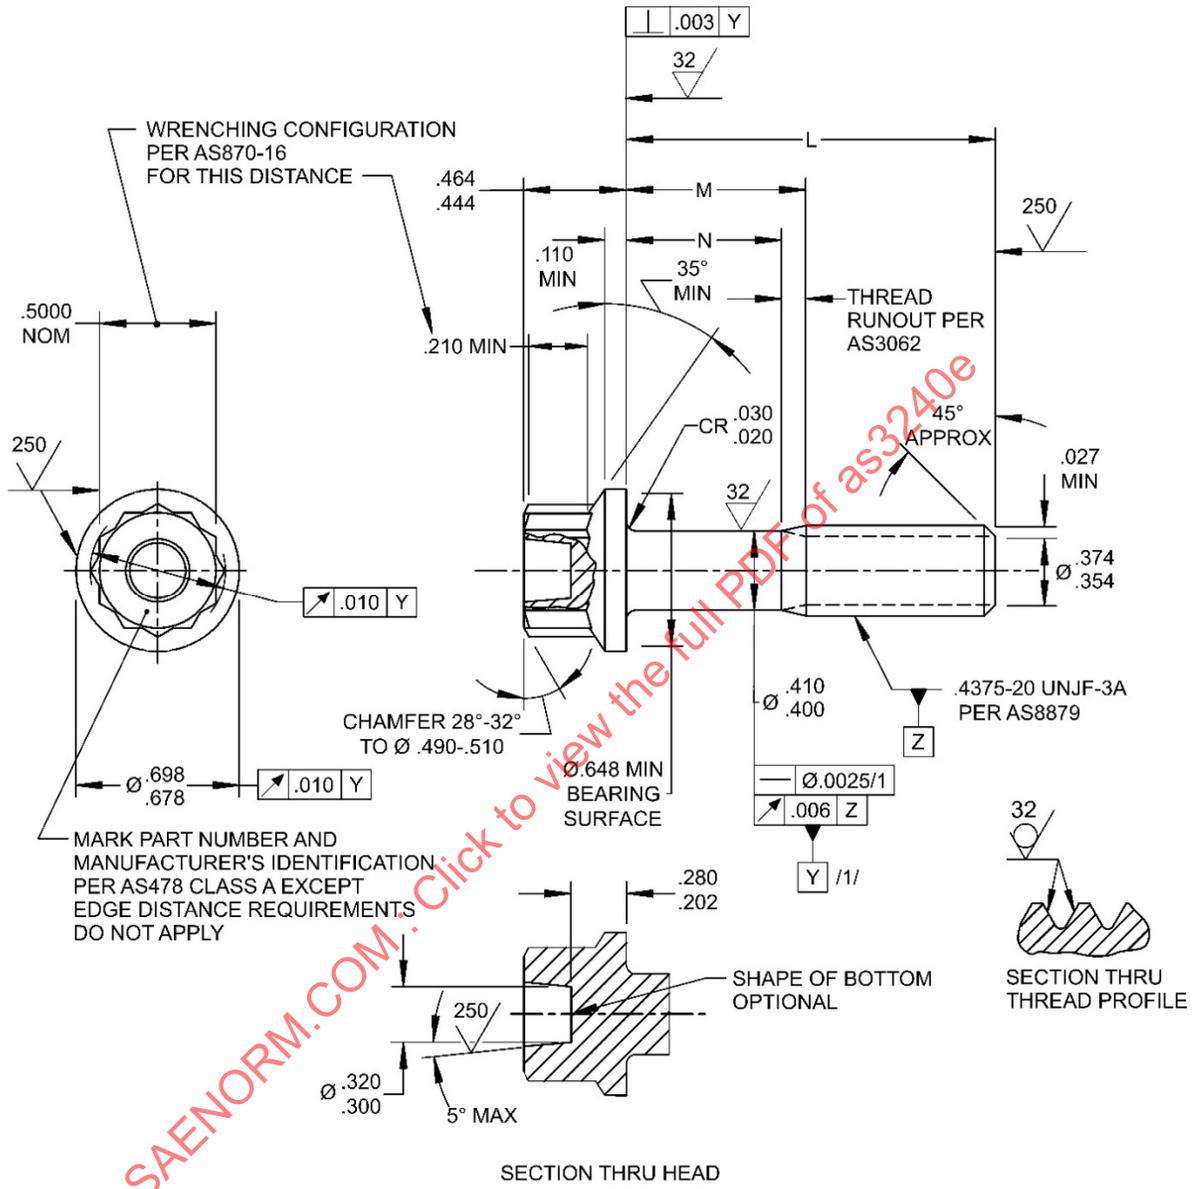


FIGURE 1 - BOLT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3240E/>

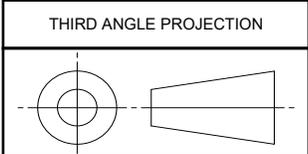

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7466



AEROSPACE STANDARD

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED
 WASHER HEAD, PD SHANK, NICKEL ALLOY,
 UNS N07718, 185 KSI MIN, .4375-20 UNJF-3A

AS3240™
 SHEET 1 OF 3

REV.
E

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	N MIN	M MAX	APPROX MASS LB/100	PART NO.	L	N MIN	M MAX	APPROX MASS LB/100
AS3240-04	.678-.698	.030	.125	5.21	AS3240-31	2.740-2.760	1.465	1.625	13.13
AS3240-05	.740-.760	.030	.125	5.46	AS3240-32	2.865-2.885	1.590	1.750	13.61
AS3240-06	.802-.822	.030	.125	5.70	AS3240-33	2.990-3.010	1.715	1.875	14.09
AS3240-07	.865-.885	.030	.125	5.94	AS3240-34	3.115-3.135	1.840	2.000	14.57
AS3240-08	.928-.948	.030	.125	6.18	AS3240-35	3.240-3.260	1.965	2.125	15.05
AS3240-09	.990-1.010	.030	.125	6.42	AS3240-36	3.365-3.385	2.090	2.250	15.53
AS3240-10	1.052-1.072	.030	.125	6.65	AS3240-37	3.490-3.510	2.215	2.375	16.01
AS3240-11	1.115-1.135	.030	.125	6.89	AS3240-38	3.615-3.635	2.340	2.500	16.48
AS3240-12	1.178-1.198	.030	.125	7.13	AS3240-39	3.740-3.760	2.465	2.625	16.97
AS3240-13	1.240-1.260	.030	.125	7.37	AS3240-40	3.865-3.885	2.590	2.750	17.45
AS3240-14	1.302-1.322	.030	.188	7.62	AS3240-41	3.990-4.010	2.715	2.875	17.93
AS3240-15	1.365-1.385	.090	.250	7.86	AS3240-42	4.115-4.135	2.840	3.000	18.40
AS3240-16	1.428-1.448	.153	.312	8.10	AS3240-43	4.240-4.260	2.965	3.125	18.89
AS3240-17	1.490-1.510	.215	.375	8.34	AS3240-44	4.365-4.385	3.090	3.250	19.37
AS3240-18	1.552-1.572	.277	.438	8.57	AS3240-45	4.490-4.510	3.215	3.375	19.85
AS3240-19	1.615-1.635	.340	.500	8.81	AS3240-46	4.615-4.635	3.340	3.500	20.32
AS3240-20	1.678-1.698	.403	.562	9.05	AS3240-47	4.740-4.760	3.465	3.625	20.80
AS3240-21	1.740-1.760	.465	.625	9.27	AS3240-48	4.865-4.885	3.590	3.750	21.89
AS3240-22	1.802-1.822	.527	.688	9.53	AS3240-49	4.990-5.010	3.715	3.875	21.77
AS3240-23	1.865-1.885	.590	.750	9.77	AS3240-50	5.115-5.135	3.840	4.000	22.24
AS3240-24	1.928-1.948	.653	.812	10.02	AS3240-51	5.240-5.260	3.965	4.125	22.72
AS3240-25	1.990-2.010	.715	.875	10.26	AS3240-52	5.365-5.385	4.090	4.250	23.21
AS3240-26	2.115-2.135	.840	1.000	10.73	AS3240-53	5.490-5.510	4.215	4.375	23.69
AS3240-27	2.240-2.260	.965	1.125	11.21	AS3240-54	5.615-5.635	4.340	4.500	24.18
AS3240-28	2.365-2.385	1.090	1.250	11.69	AS3240-55	5.740-5.760	4.465	4.625	24.67
AS3240-29	2.490-2.510	1.215	1.375	12.18	AS3240-56	5.865-5.885	4.590	4.750	25.16
AS3240-30	2.615-2.635	1.340	1.500	12.65	AS3240-57	5.990-6.010	4.715	4.875	25.64

NOTES

- 1/1/ FOR PART NUMBERS AS3240-04 THROUGH AS3240-24, DATUM Z SHALL REPLACE DATUM Y.
2. MATERIAL: CORROSION AND HEAT RESISTANT NICKEL ALLOY PER AMS5662 (COMPOSITION SIMILAR TO UNS N07718).
3. PROCUREMENT SPECIFICATION: AS7466.
4. FLUORESCENT PENETRANT INSPECTION BEFORE PLATING PER ASTM E1417/E1417M, TYPE 1, SENSITIVITY LEVEL 2 MIN.
5. SURFACE TEXTURE: SYMBOLS ARE PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra.
6. BREAK SHARP EDGES .003 TO .015, UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS ARE IN INCHES.
8. DIMENSIONING AND TOLERANCING PER ASME Y14.5-2018.
9. UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
10. DO NOT USE UNASSIGNED PART NUMBERS.

	AEROSPACE STANDARD	AS3240™ SHEET 2 OF 3	REV. E
	BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, NICKEL ALLOY, UNS N07718, 185 KSI MIN., .4375-20 UNJF-3A		