



AS3245

FED SUP CODE
5306

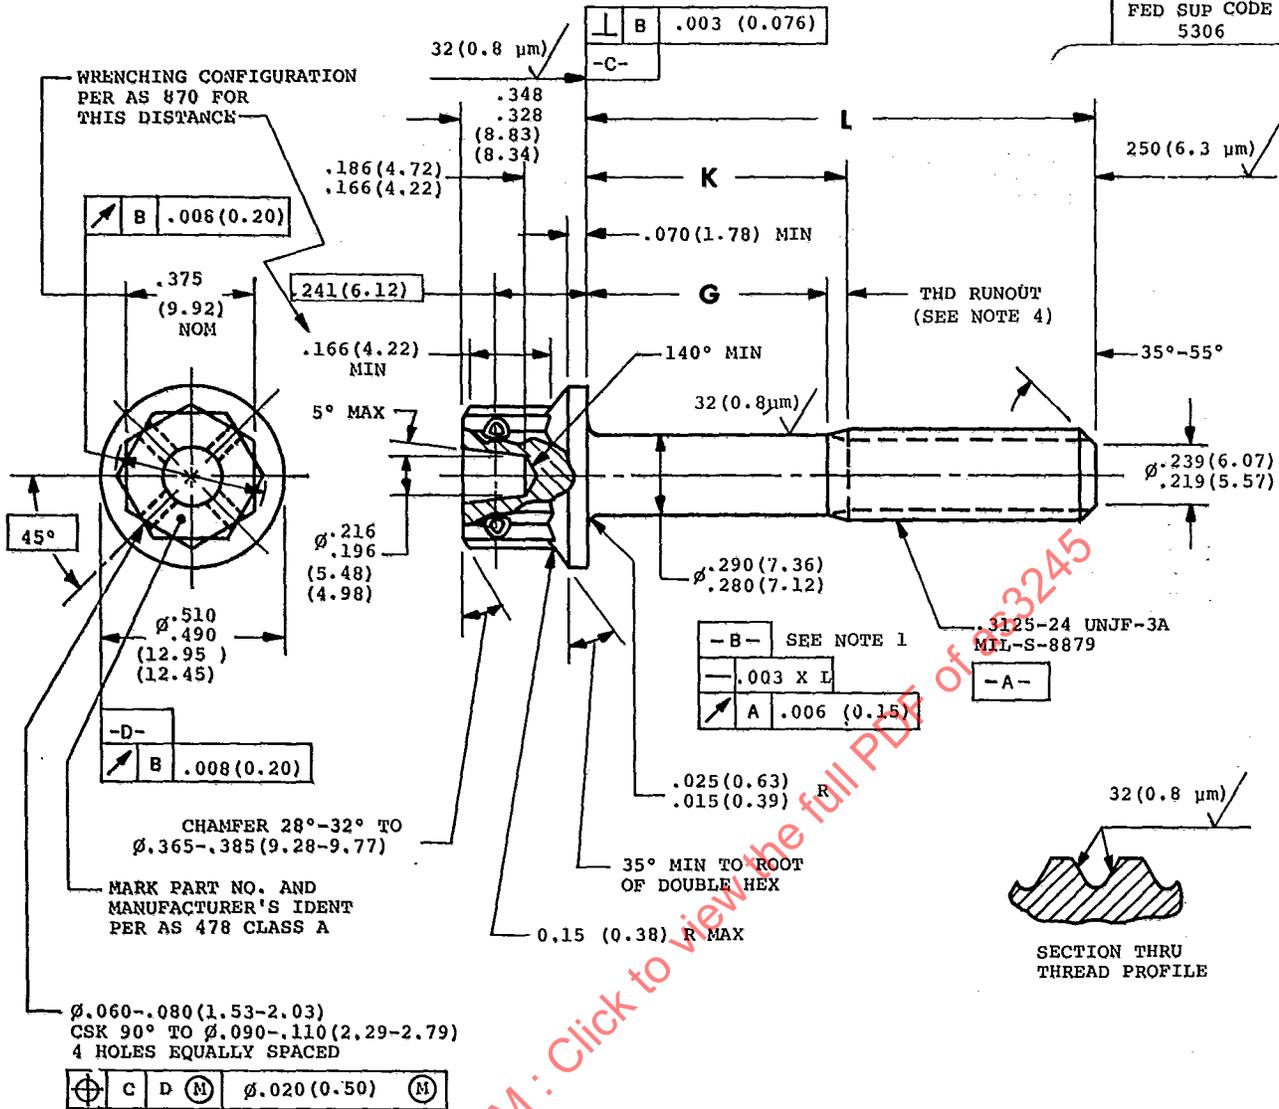

1. FOR PART NUMBERS AS3245-04 THRU AS3245-19 THE THREAD PD SHALL REPLACE DATUM B.
2. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5662.
3. HARDNESS: 36-45 HRC.
4. MANUFACTURING SPECIFICATION: AMS 7466.
5. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
6. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36-1978, REQUIREMENTS PER ANSI B46.1-1978. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES (3.2 MICROMETRES) EXCEPT UPSET HEAD.
7. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
8. DIMENSIONS IN INCHES (MILLIMETRES). METRIC CONVERSIONS ARE INTERNATIONAL SYSTEM UNITS (SI). UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGULAR DIMENSIONS $\pm 5^\circ$.
9. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1973.
10. DO NOT USE UNASSIGNED PART NUMBERS.

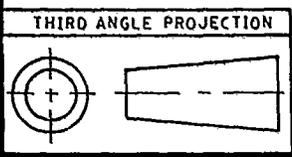

PREPARED BY SAE COMMITTEE E-25, ENGINE AND PROPELLER STANDARD UTILITY PARTS

Society of Automotive Engineers, Inc.
400 COMMONWEALTH DRIVE, WARRENDALE, PA. 15096

AEROSPACE STANDARD
BOLT, MACHINE-DOUBLE H Distributed under license from the IHS Archive),
DRILLED, PD SHANK, AMS 5662, .3125-24 UNJF-3A

AS3245
SHEET 1 OF 2

SAE Technical Board rules provide that: "All technical reports, including standards approved and practice in industry or is entirely voluntary. There is no agreement to adhere to any SAE standard or recommendation. The Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against infringement of patents."

Issued 7-1-80 Revised

COPYRIGHT 1980 SAE