


REV.
A

AS3320

FEDERAL SUPPLY CLASS
5307

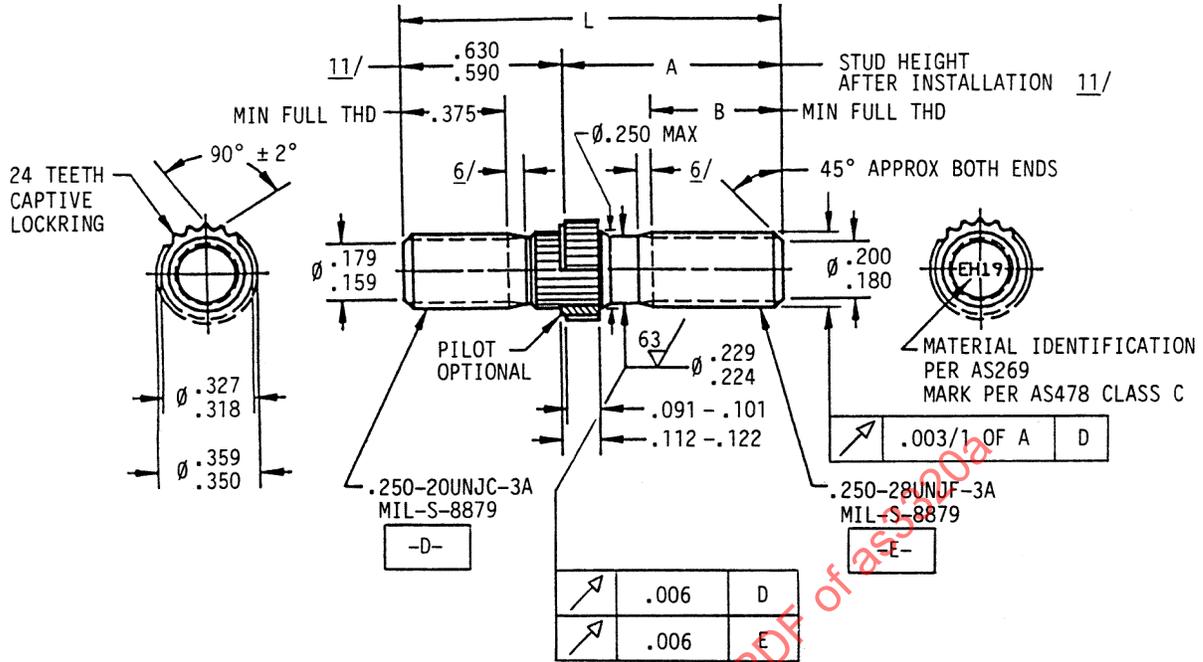

NOTES:

1. MATERIAL: STUD - CORROSION AND HEAT RESISTANT STEEL, AMS-5731. (UNS S66286)
LOCKRING - CRES, AMS-5640. (UNS S30300)
2. HEAT TREATMENT: STUD - SOLUTION AND PRECIPITATION HEAT TREATED. SEE PROCUREMENT SPECIFICATION.
3. HARDNESS: 24-37 HRC, 247-344 HB, OR 260-363 HV.
4. FINISH: STUD AND LOCKRING - CLEANED (PASSIVATED) PER PROCUREMENT SPECIFICATION.
5. FLUORESCENT PENETRANT INSPECTION: AMS-2645, EXCEPT LOCKRING. ACCEPTANCE CRITERIA PER AMS-7482.
- 6/ PROCUREMENT SPECIFICATION: AMS-7482, EXCEPT STRESS RUPTURE TEST IS WAIVED, AND SPECIAL STUD END THREAD REQUIREMENTS OF AS3062 ARE NOT APPLICABLE. INCOMPLETE LEAD AND RUNOUT THREAD REQUIREMENTS ON BOTH THREADS SHALL BE AS SPECIFIED IN AS3062 FOR BOLTS.

(A) ENTIRE STANDARD REVISED

AS AND AMS ARE SAE PUBLICATIONS.
ANSI IS AMERICAN NATIONAL STANDARDS INSTITUTE PUBLICATION.

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SOURCE CONTROL DRAWING

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

STUD - STRAIGHT, RING LOCKED, CRES AMS-5731
0.250-20UNJC X 0.250-28UNJF

AS3320
SHEET 1 OF 3

REV.
A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1979-09 REVISED 1990-08 REAFFIRMED 2001-11

REV.
A

AS3320

7. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36-1978; REQUIREMENTS PER ANSI/ASME B46.1-1985. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 μ in Ra, EXCEPT SERRATIONS TO BE 250 μ in Ra, AND THREAD FLANKS AND ROOT TO BE 32 μ in Ra.
8. BREAK EDGES 0.003-0.015, EXCEPT LOCKRING.
9. DIMENSIONING AND TOLERANCING: ANSI Y14.5M-1982.
10. DIMENSIONS IN INCHES.
- 11/ LOCKRING INTERNAL SERRATIONS TO HAVE FREE MOVEMENT ALONG STUD AXIS. DIMENSIONS APPLY WHEN LOCKRING IS AGAINST STOP TOWARD 0.250-28 THREAD.
12. MARK AEROSPACE STANDARD IDENTIFICATION NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
13. DO NOT USE UNASSIGNED AEROSPACE STANDARD IDENTIFICATION NUMBERS.
14. STUD TO BE INSTALLED IN ACCORDANCE WITH AS1561 INTO TAPPED HOLE PER AS1620.

SOURCE OF SUPPLY:

REXNORD/ROSAN PRODUCTS
3130 W. HARVARD ST.
P.O. BOX 25225
SANTA ANA, CA 92799
MANUFACTURER'S CAGE CODE 83324

IDENTIFICATION OF THE APPROVED SOURCE HEREON IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR ITEMS DESCRIBED ON THIS DRAWING.

ONLY THE ITEM DESCRIBED ON THIS DRAWING WHEN PROCURED FROM THE VENDOR LISTED HEREON IS APPROVED FOR USE IN THE APPLICATIONS SPECIFYING THIS AEROSPACE STANDARD IDENTIFICATION NUMBER. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR TESTING AND APPROVAL BY THE DESIGN ACTIVITY RESPONSIBLE FOR THE APPLICATION.