

REV.
B

AS33411

RATIONALE

USER REQUESTED THE COLOR BLACK BE REINSTATED TO THE SPECIFICATION. THEY NEED THE UV RESISTANCE AND THESE MOUNTS ARE USED WITH THE BLACK -0 STRAPS.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS23190.

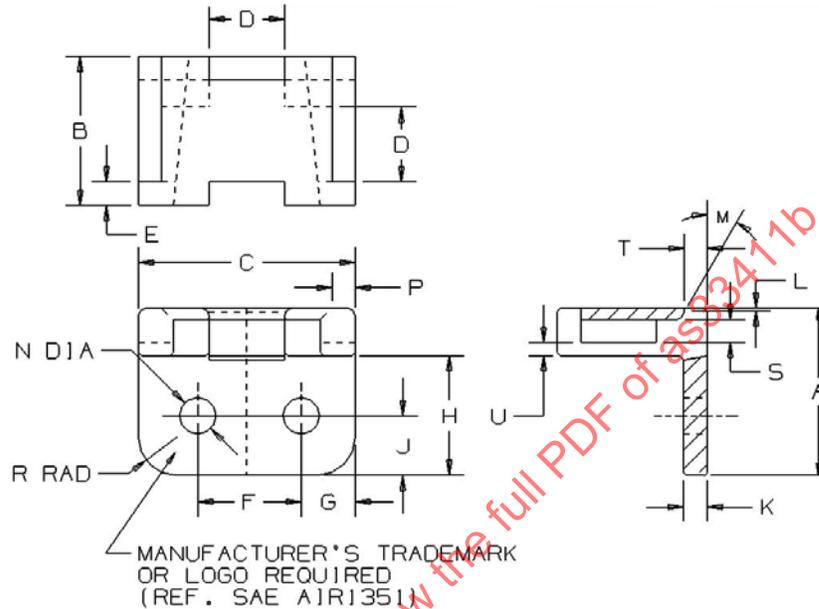



FIGURE 1 - MS3341 MOUNTING BRACKET CONFIGURATION

TABLE 1 - FIGURE 1 DIMENSIONS

DASH NO.	A	B	C	D	E	F	G	H	J	K	L	M	N DIA	P
	±.030	±.030	±.030	MIN	±.010	±.010	±.020	±.015	±.015	±.015	±.010	±3°		MIN
-1	1.000	.750	1.000	.315	.100	.500	.250	.750	.350	.180	.031	30°	.135 — .115	.093
-2	.437	.390	.562	.195	.062	.281	.140	.312	.156	.062	.020	—	.100 — .090	.060

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS33411B>

THIRD ANGLE PROJECTION

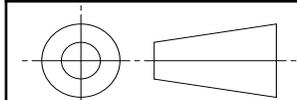

CUSTODIAN: AE-8/AE-8C2

PROCUREMENT SPECIFICATION: AS23190



AEROSPACE STANDARD

BRACKET, MOUNTING,
PLASTIC FOR USE WITH
MS3367 PLASTIC TIEDOWN STRAPS

AS33411
SHEET 1 OF 2

REV.
B

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.