


REV.
A

SAE AS3409

FEDERAL SUPPLY CLASS
5306


RATIONALE

FIGURE 1 REDRAWN, THREAD SPEC CORRECTED, TABLE 1 SMALLER SIZES -04 TO -11 ADDED, NOTES GENERALLY UPDATED.

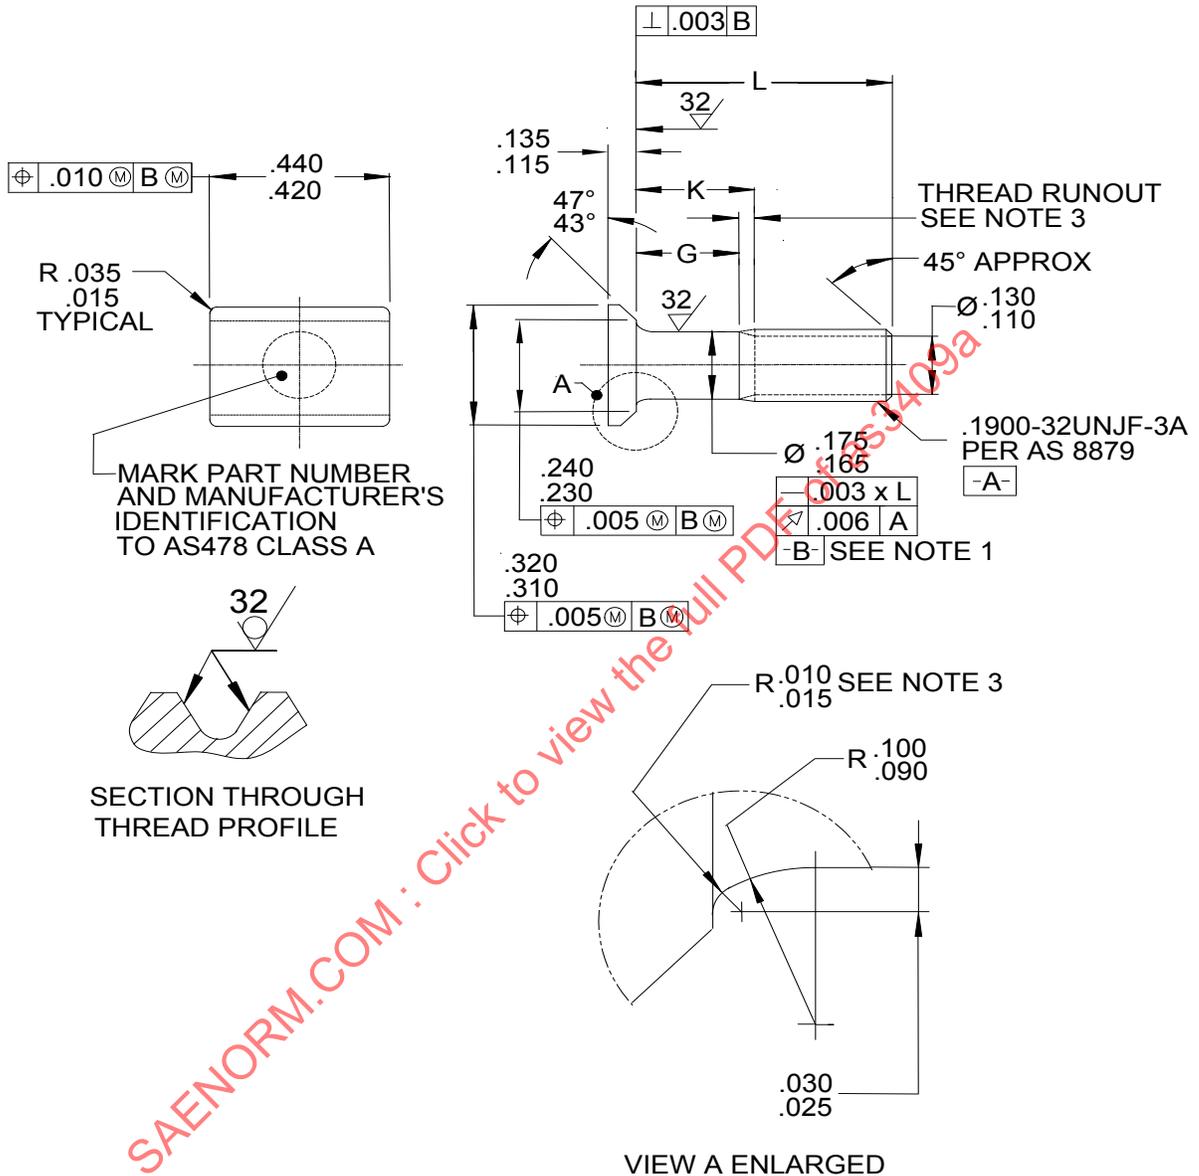

SAENORM.COM : Click to view the full PDF of AS3409a

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3409a>



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7467 SEE NOTE 3

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) BOLT, TEE HEAD - AMS5662, CHAMFERED, PD SHANK, .1900-32 UNJF-3A (STRESS RUPTURE RESISTANT)

SAE AS3409
SHEET 1 OF 3

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1988-06 REAFFIRMED 2004-07 REVISED 2013-01

TABLE 1

PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100
AS3409-04	.365 - .385	.052	.134	.65
AS3409-05	.428 - .448	.052	.134	.69
AS3409-06	.490 - .510	.052	.134	.73
AS3409-07	.552 - .572	.052	.134	.77
AS3409-08	.615 - .635	.052	.134	.81
AS3409-09	.678 - .698	.052	.134	.85
AS3409-10	.740 - .760	.052	.134	.89
AS3409-11	.802 - .822	.060	.182	.93
AS3409-12	.865 - .885	.123	.245	.97
AS3409-13	.928 - .948	.186	.308	1.01
AS3409-14	.990 - 1.010	.248	.370	1.06
AS3409-15	1.052 - 1.072	.310	.432	1.10
AS3409-16	1.115 - 1.135	.373	.495	1.14
AS3409-17	1.178 - 1.198	.436	.558	1.18
AS3409-18	1.240 - 1.260	.498	.620	1.23
AS3409-19	1.302 - 1.322	.560	.682	1.27
AS3409-20	1.365 - 1.385	.623	.745	1.31
AS3409-21	1.428 - 1.448	.686	.808	1.35
AS3409-22	1.490 - 1.510	.748	.870	1.39
AS3409-23	1.552 - 1.572	.810	.932	1.43
AS3409-24	1.615 - 1.635	.873	.995	1.47
AS3409-25	1.678 - 1.698	.936	1.058	1.52
AS3409-26	1.740 - 1.760	.998	1.120	1.56
AS3409-27	1.802 - 1.822	1.060	1.182	1.60
AS3409-28	1.865 - 1.885	1.123	1.245	1.64
AS3409-29	1.928 - 1.948	1.186	1.308	1.68
AS3409-30	1.990 - 2.010	1.248	1.370	1.72
AS3409-31	2.115 - 2.135	1.373	1.495	1.80
AS3409-32	2.240 - 2.260	1.498	1.620	1.88
AS3409-33	2.365 - 2.385	1.623	1.745	1.97
AS3409-34	2.490 - 2.510	1.748	1.870	2.05
AS3409-35	2.615 - 2.635	1.873	1.995	2.13
AS3409-36	2.740 - 2.760	1.998	2.120	2.22
AS3409-37	2.865 - 2.885	2.123	2.245	2.31
AS3409-38	2.990 - 3.010	2.248	2.370	2.39
AS3409-39	3.115 - 3.135	2.373	2.495	2.48
AS3409-40	3.240 - 3.260	2.498	2.620	2.56
AS3409-41	3.365 - 3.385	2.623	2.745	2.64
AS3409-42	3.490 - 3.510	2.748	2.870	2.73
AS3409-43	3.615 - 3.635	2.873	2.995	2.81
AS3409-44	3.740 - 3.760	2.998	3.120	2.89
AS3409-45	3.865 - 3.885	3.123	3.245	2.97