

AS3479

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

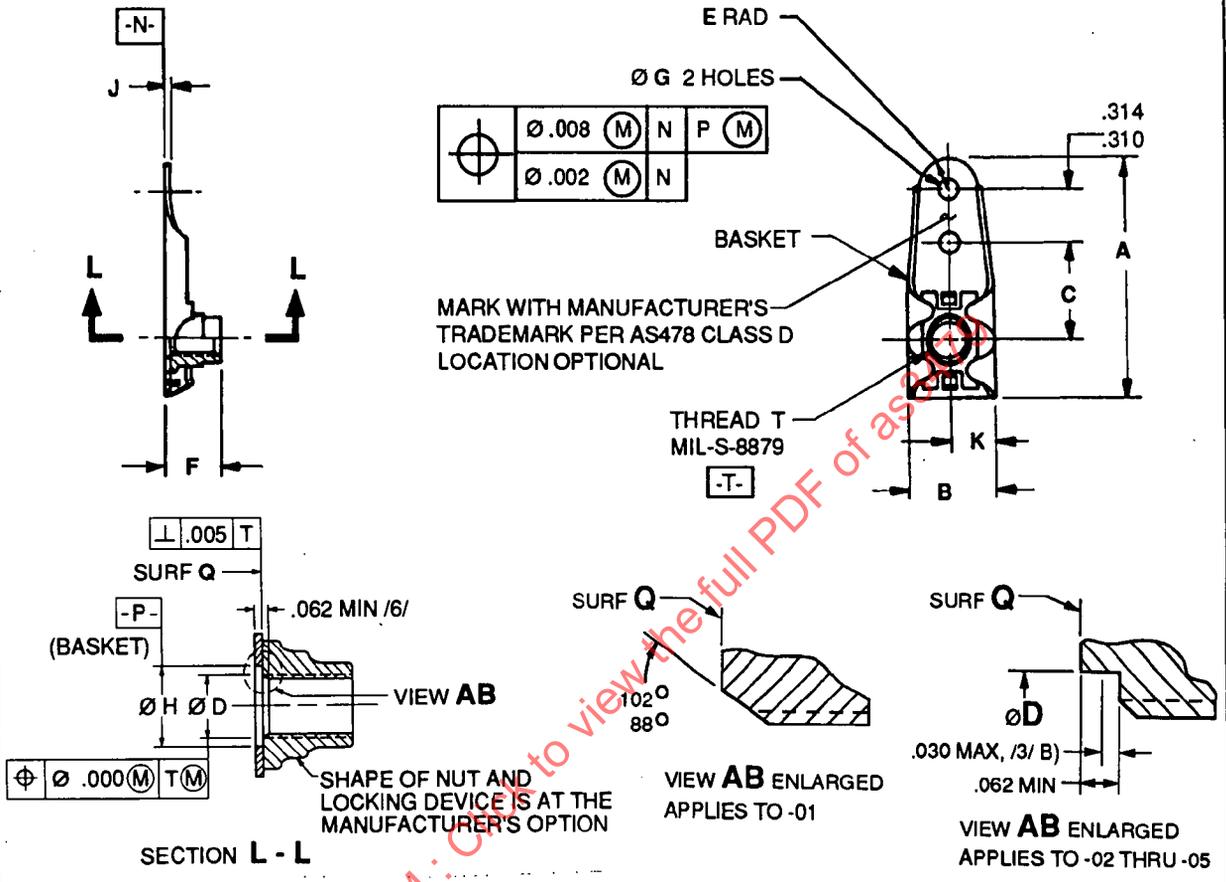


FIGURE 1

PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15095-0001

AEROSPACE STANDARD

NUT, SELF-LOCKING, PLATE, ONE LUG,
FLOATING, LOW HEIGHT, UNS S66286

AS3479

SHEET 1 OF 3

ISSUED 1991-02-22 REVISED

AS3479

TABLE 1

PART NUMBER	T THREAD	A MAX	B	C ±0.005	ØD MIN	E MIN	F MAX	ØG +0.005 -0.000	ØH	J	K ±0.010	AXIAL STRENGTH LBF MIN	APPROX MASS LB/100
AS3479-01	0.1380-32UNJC-3B	1.051	0.290-0.422	0.344	—	0.100	0.203	0.098	0.198-0.270	0.028-0.032	0.178	1130	0.53
AS3479-02	0.1640-32UNJC-3B	1.051	0.290-0.422	0.344	0.168	0.100	0.250	0.098	0.224-0.270	0.028-0.032	0.178	1720	0.54
AS3479-03	0.1900-32UNJF-3B	1.051	0.290-0.422	0.344	0.194	0.100	0.250	0.098	0.250-0.270	0.028-0.032	0.178	2460	0.56
AS3479-04	0.2500-28UNJF-3B	1.306	0.350-0.531	0.500	0.254	0.100	0.281	0.098	0.310-0.330	0.028-0.032	0.220	4580	1.00
AS3479-05	0.3125-24UNJF-3B	1.396	0.412-0.641	0.500	0.317	0.125	0.328	0.130	0.372-0.392	0.039-0.045	0.263	7390	1.44