

REV.
D

AS3481

FEDERAL SUPPLY CLASS
5310

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


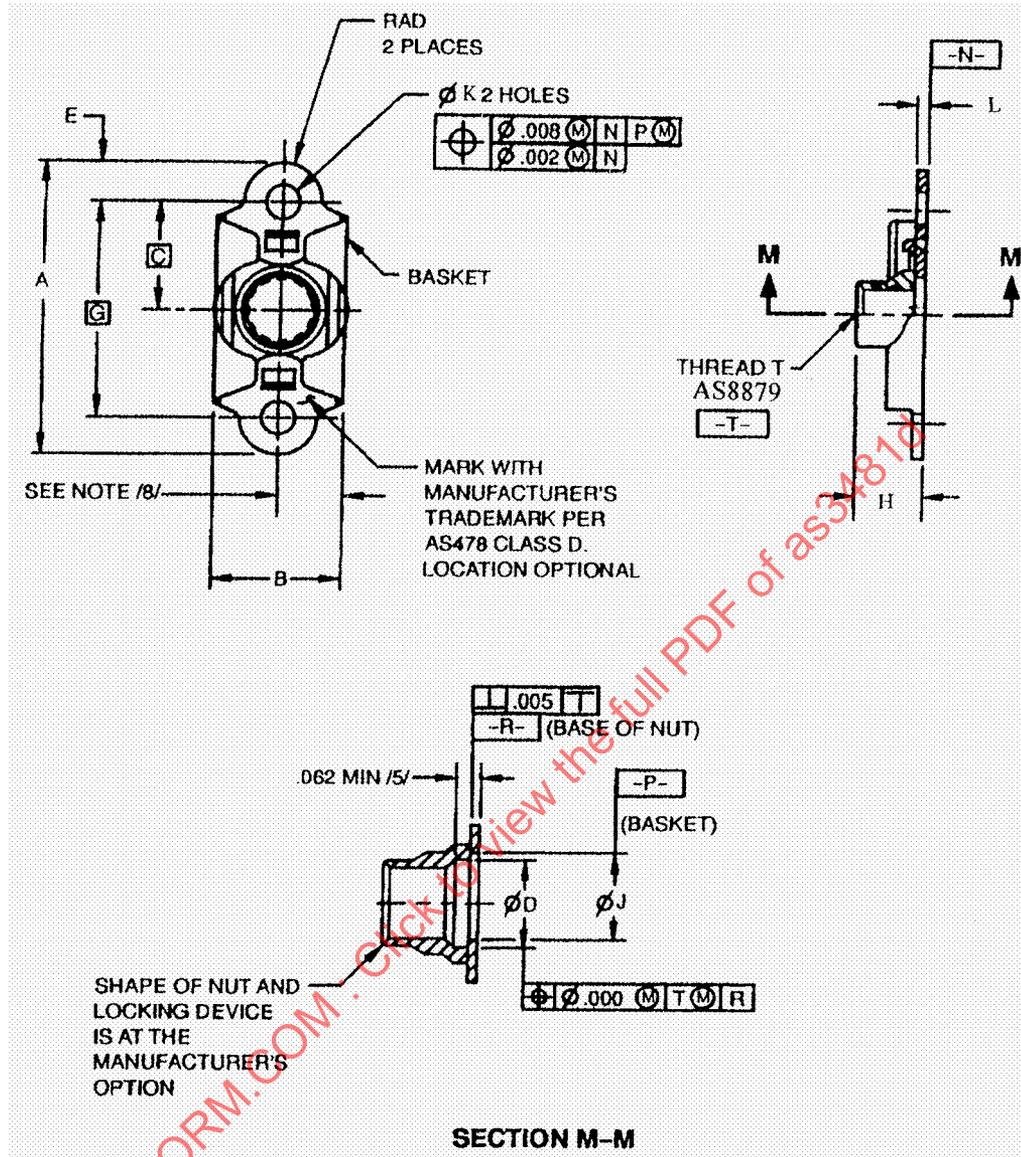


FIGURE 1



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

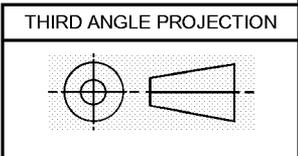

AEROSPACE STANDARD
 (R) NUT, SELF-LOCKING, PLATE, TWO LUG, FLOATING,
 REDUCED RIVET SPACING, LOW HEIGHT,
 UNS S66286, CLASS: 125 KSI/800 °F

AS3481
 SHEET 1 OF 3

**REV.
D**

ISSUED 1991-02 REVISED 2001-12

REV.
D

AS3481

TABLE 1A

PART NUMBER AS3481	T THREAD	A MAX	B	C BASIC	øD CBORE MIN	E MIN	H MAX
-01	.1380-32UNJC-3B	.682	.290-.357	.218	--	.070	.171
-02	.1640-32UNJC-3B	.707	.290-.367	.234	.168	.100	.250
-03	.1900-32UNJF-3B	.739	.290-.416	.250	.194	.100	.250
-04	.2500-28UNJF-3B	.801	.350-.500	.281	.254	.100	.281
-05	.3125-24UNJF-3B	1.010	.412-.581	.359	.317	.117	.328

TABLE 1B

PART NUMBER AS3481	G BASIC	øK +.005 -.000	øJ	L ₁	AXIAL STRENGTH LBF MIN	APPROX MASS LB/100
-01	.437	.098	.178-.270	.020-.090	1130	.32
-02	.468	.098	.204-.270	.025-.090	1720	.36
-03	.500	.098	.230-.270	.025-.090	2460	.39
-04	.562	.098	.290-.330	.027-.090	4580	.69
-05	.718	.130	.352-.392	.032-.105	7390	1.10

NOTES:

1. MATERIAL:
 - a. NUT: CORROSION AND HEAT RESISTANT STEEL AMS 5525, AMS 5731, OR AMS 5734.
 - b. BASKET: CORROSION AND HEAT RESISTANT STEEL AMS 5525.
2. HEAT TREATMENT: AFTER FORMING, PLATE NUTS SHALL BE PRECIPITATION HEATED TO A HARDNESS NOT TO EXCEED THAT SPECIFIED IN NOTE 6.
3. FINISH:
 - a. NUT: SILVER PLATE PER AMS 2411; SILVER PLATE ONLY ON THREADS, EXCEPT:
 1. SIZE -01 MAY HAVE OPTIONAL COVERAGE ON COUNTERSINK.
 2. SIZE -02 THROUGH -05 MAY HAVE OPTIONAL COVERAGE IN COUNTERBORE TO .030 MAXIMUM DEPTH.
 DIMENSIONS APPLY AFTER PLATING.
 - b. BASKET: PASSIVATE PER AMS-QQ-P-35, TYPE II OR VIII.
4. PROCUREMENT SPECIFICATION: AS4393, EXCEPT AS FOLLOWS:
 - a. BAKE AT 800 °F ± 15 °F IN LIEU OF 1200 °F ± 15 °F FOR NUTS TESTED AFTER BAKE.
 - b. AXIAL STRENGTH LOAD PER MIL-DTL-25027. SEE SHEET 2, TABLE 1.
- /5/ SIZE -01 MAY BE COUNTERSUNK OR RADIUSED WITHIN øJ. SIZE -02 AND LARGER SHALL BE COUNTERBORED TO øD TO .062 MINIMUM DEPTH..
6. HARDNESS: 44 HRC MAXIMUM.
7. RADIAL FLOAT OF NUT THREADS RELATIVE TO BASKET øJ, .020 MINIMUM.
- /8/ øJ TO BE CENTERED ON WIDTH B WITHIN ±.010.
9. REMOVE BURRS AND SHARP EDGES.
10. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 µin Ra.
11. DIMENSIONING AND TOLERANCING: ANSI Y14.5M-1982 (ASME PUBLICATION).
12. DIMENSIONS ARE IN INCHES.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AEROSPACE STANDARD

(R) NUT, SELF-LOCKING, PLATE, TWO LUG, FLOATING,
REDUCED RIVET SPACING, LOW HEIGHT,
UNS S66286, CLASS: 125 KSI/800 °F

AS3481
SHEET 2 OF 3

REV.
D