

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C

AS3484

FEDERAL SUPPLY CLASS

RATIONALE


THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. THIS STANDARD HAS BEEN STABILIZED.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as3484C

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3484C>

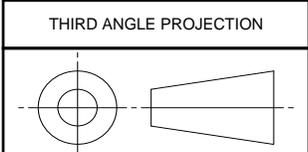

CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: NONE	
	AEROSPACE STANDARD		AS3484
	GASKET - 37° FLARED TUBE FITTING, NICKEL, AMS5553		

ISSUED 1991-02 NONCURRENT 1998-02 REAFFIRMED NONCURRENT 2003-10 REVISED 2007-02 STABILIZED 2014-09

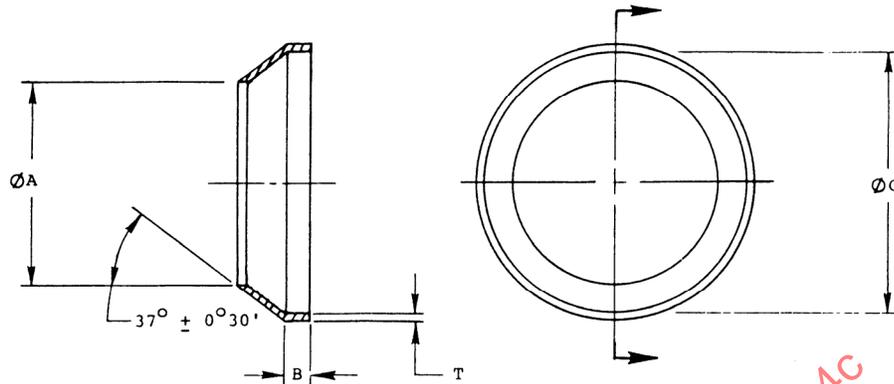


FIGURE 1

TABLE 1

AS IDENT. NUMBER	NOM TUBE OD	ϕA	B	ϕC	T	LB PER 100	VENDOR NUMBER
AS3484-02	0.125	0.103-0.118	0.045-0.060	0.245-0.250	0.004-0.006	0.017	DY90-N-2
AS3484-03	0.188	0.166-0.181	0.045-0.060	0.307-0.312	0.004-0.006	0.021	DY90-N-3
AS3484-04	0.250	0.213-0.228	0.058-0.073	0.359-0.364	0.004-0.006	0.028	DY90-N-4
AS3484-05	0.312	0.275-0.290	0.058-0.073	0.421-0.426	0.004-0.006	0.035	DY90-N-5
AS3484-06	0.375	0.338-0.353	0.058-0.073	0.476-0.481	0.004-0.006	0.040	DY90-N-6
AS3484-07	0.438	0.401-0.416	0.060-0.075	0.539-0.544	0.004-0.006	0.088	DY90-N-7
AS3484-08	0.500	0.446-0.461	0.080-0.095	0.654-0.659	0.009-0.011	0.151	DY90-N-8
AS3484-09	0.562	0.529-0.544	0.080-0.095	0.722-0.727	0.009-0.011	0.171	DY90-N-9
AS3484-10	0.625	0.562-0.577	0.090-0.105	0.767-0.772	0.009-0.011	0.181	DY90-N-10
AS3484-11	0.688	0.625-0.640	0.090-0.105	0.882-0.887	0.009-0.011	0.229	DY90-N-11
AS3484-12	0.750	0.687-0.702	0.090-0.105	0.938-0.943	0.009-0.011	0.283	DY90-N-12
AS3484-14	0.875	0.826-0.841	0.090-0.105	1.070-1.075	0.009-0.011	0.303	DY90-N-14
AS3484-16	1.000	0.936-0.951	0.110-0.125	1.188-1.193	0.009-0.011	0.362	DY90-N-16
AS3484-18	1.125	1.046-1.061	0.110-0.125	1.375-1.380	0.009-0.011	0.457	DY90-N-18
AS3484-20	1.250	1.175-1.190	0.110-0.125	1.501-1.506	0.009-0.011	0.546	DY90-N-20
AS3484-24	1.500	1.410-1.425	0.110-0.125	1.750-1.755	0.009-0.011	0.662	DY90-N-24
AS3484-28	1.750	1.680-1.695	0.110-0.125	2.125-2.130	0.009-0.011	0.982	DY90-N-28
AS3484-32	2.000	1.913-1.928	0.110-0.125	2.375-2.380	0.009-0.011	1.068	DY90-N-32

INACTIVE - SEE NOTE 8

	AEROSPACE STANDARD	AS3484 SHEET 1 OF 2	REV. C
	GASKET - 37° FLARED TUBE FITTING, NICKEL, AMS5553		