

AS3511

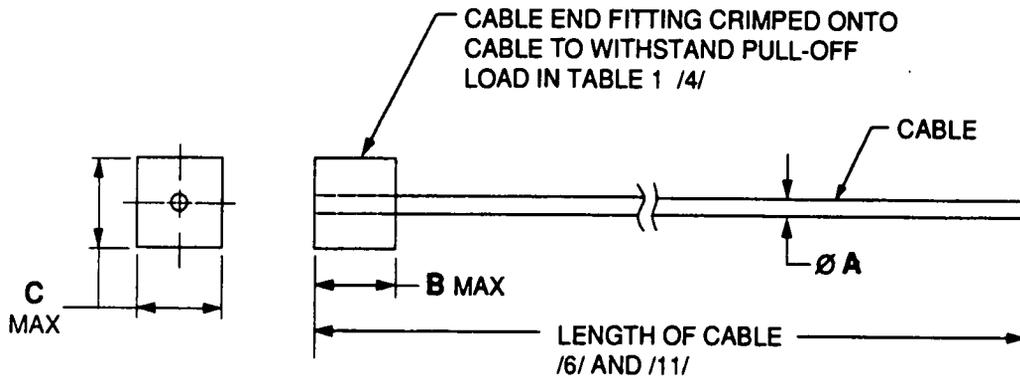


FIGURE 1 - SAFETY CABLE-END FITTING AND CABLE ASSEMBLY

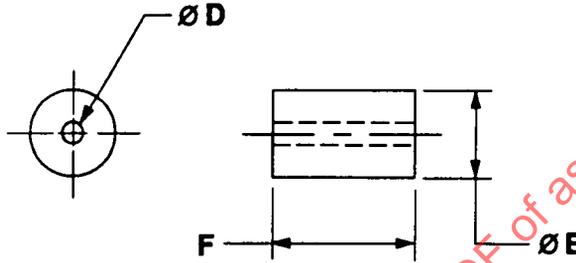


FIGURE 2 - FERRULE


TABLE 1A - DIMENSIONS A-D

PART NUMBER	ϕA /5/	B MAX	C MAX	ϕD
AS3511-01XXL	.020-.026 (0.51-0.66)	.135 (3.43)	.085 (2.16)	.029-.032 (0.74-0.81)
AS3511-02XXL	.032-.038 (0.81-0.97)	.135 (3.43)	.125 (3.18)	.043-.049 (1.09-1.25)

TABLE 1B - DIMENSIONS E-F

PART NUMBER	ϕE	F	CABLE TYPE	MINIMUM PULL-OFF LOAD
AS3511-01XXL	.089-.091 (2.26-2.31)	.087-.095 (2.21-2.41)	STRAND 1X7	30 (133.4)
AS3511-02XXL	.104-.106 (2.64-2.69)	.156-.164 (3.96-4.17)	CABLE 3X7	70 (311.4)

THIRD ANGLE PROJECTION



CUSTODIAN: SAE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CABLE, SAFETY, KIT -
CORROSION RESISTANT STEEL,
UNS S30400

AS3511

SHEET 1 OF 2

ISSUED 1993-01-04 REVISED

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.