

REV. B

SAE AS3511

FEDERAL SUPPLY CLASS
5340 5342

RATIONALE

AS3511B HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

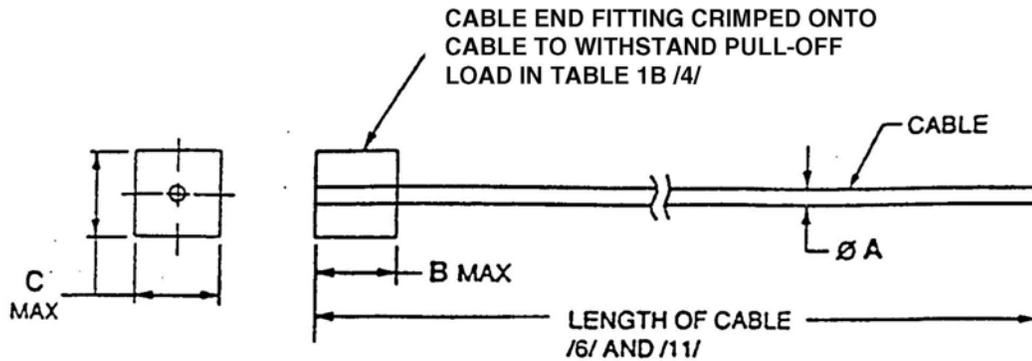


FIGURE 1 - SAFETY CABLE-END FITTING AND CABLE

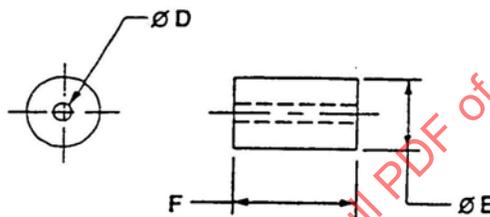


FIGURE 2 - FERRULE

TABLE 1A - DIMENSIONS A-D


PART NUMBER	Ø A /5/ INCH (mm)	B MAX INCH (mm)	C MAX INCH (mm)	Ø D INCH (mm)
AS3511-01XXX	.022-.026 (0.56-0.66)	.135 (3.43)	.085 (2.16)	.029-.032 (0.74-0.81)
AS3511-02XXX	.032-.038 (0.81-0.97)	.135 (3.43)	.125 (3.18)	.043-.049 (1.09-1.24)
AS3511-03XXX	.040-.046 (1.02-1.17)	.135 (3.43)	.125 (3.18)	.051-.057 (1.30-1.45)

TABLE 1B - DIMENSIONS E-F

PART NUMBER	Ø E INCH (mm)	F INCH (mm)	CABLE TYPE	MINIMUM PULL-OFF LOAD POUND (NEWTON) SEE NOTE /10/
AS3511-01XXX	.089-.091 (2.26-2.31)	.087-.095 (2.21-2.41)	STRAND 1X7	30 (133.4)
AS3511-02XXX	.104-.106 (2.64-2.69)	.156-.164 (3.96-4.17)	CABLE 3X7	70 (311.4)
AS3511-03XXX	.104-.106 (2.64-2.69)	.156-.164 (3.96-4.17)	CABLE 7X7	110 (489.3)

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3511B>

THIRD ANGLE PROJECTION

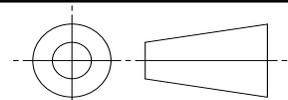

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS4536

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CABLE, SAFETY, KIT,
CORROSION RESISTANT STEEL,
UNS S30400

SAE AS3511
SHEET 1 OF 3

REV. B

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1993-01 REVISED 2008-09 REAFFIRMED 2012-11

NOTES:

1. MATERIAL: CABLE, END FITTING, AND FERRULE - AMS5697, CORROSION AND HEAT RESISTANT STEEL (UNS S30400 CRES WIRE) CHEMICAL COMPOSITION ONLY.

2. PROCUREMENT SPECIFICATION: AS4536

3. INSTALLATION IN ACCORDANCE WITH AS4536 AND AS567

/4/ CABLE END FITTING SHAPE OPTIONAL, HOWEVER, MUST BE WITHIN SPECIFIED ENVELOPE.

/5/ CUT END OF CABLE OR STRAND SHALL BE FUSED TO PREVENT UNRAVELING AND CAN BE UP TO .006 in (0.1524 mm) ABOVE ACTUAL MEASURED DIAMETER. CUT END OF CABLE OR STRAND SHALL BE FUSED TO PREVENT UNRAVELING AND CAN BE UP TO .006 in (0.1524 mm) ABOVE ACTUAL MEASURED DIAMETER. HOWEVER THE MAXIMUM FUSED END DIAMETER SHALL NOT EXCEED .028, .042, .050 OR .076 FOR -01XXX, -02XXX, -03XXX, OR -04XXX RESPECTIVELY.

/6/ LENGTH OF CABLE SHALL BE 3.0 in (76.2 mm) INCREMENTS; MINIMUM LENGTH AT 6.0 in (152.4 mm), MAXIMUM LENGTH AT 24.0 in (609.6 mm), ±.50 (12.7 mm).

7. MARK PART NUMBER AND MANUFACTURER IDENTIFICATION PER AS478 CLASS N.

8. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

9. DIMENSIONS ARE IN INCHES, PARENTHESIS ARE IN MILLIMETERS.

/10/ PULL-OFF LOAD IN POUND-FORCE, PARENTHESIS IN NEWTONS.

/11/ EXAMPLE OF A KIT PART NUMBER: FOR .032 in (0.8128 mm) NOMINAL DIAMETER SAFETY CABLE AND FERRULE, 9.0 in (228.6 mm) LONG CABLE AND FERRULE (SEE NOTE 12).



EXAMPLE OF A SAFETY CABLE PART NUMBER: FOR .032 in (0.8128 mm) NOMINAL DIAMETER SAFETY CABLE 9.0 in (228.6 mm) LONG.



EXAMPLE OF A FERRULE PART NUMBER: FOR .032 in (0.8128 mm) NOMINAL DIAMETER SAFETY CABLE.



12. FERRULES SHALL BE PACKAGED IN ACCORDANCE WITH AS4536.

13. DO NOT USE UNASSIGNED PART NUMBERS.

 An SAE International Group	AEROSPACE STANDARD	SAE AS3511 SHEET 2 OF 3	REV. B
	CABLE, SAFETY, KIT, CORROSION RESISTANT STEEL, UNS S30400		