

REV.
F

AS3564™

RATIONALE

RESTRUCTURE NOTES 1, 2, AND 3 FOR CLARITY AND ADD EXCEPTION FOR RECRYSTALLIZED MICROSTRUCTURE, GENERAL EDITORIAL CHANGES.


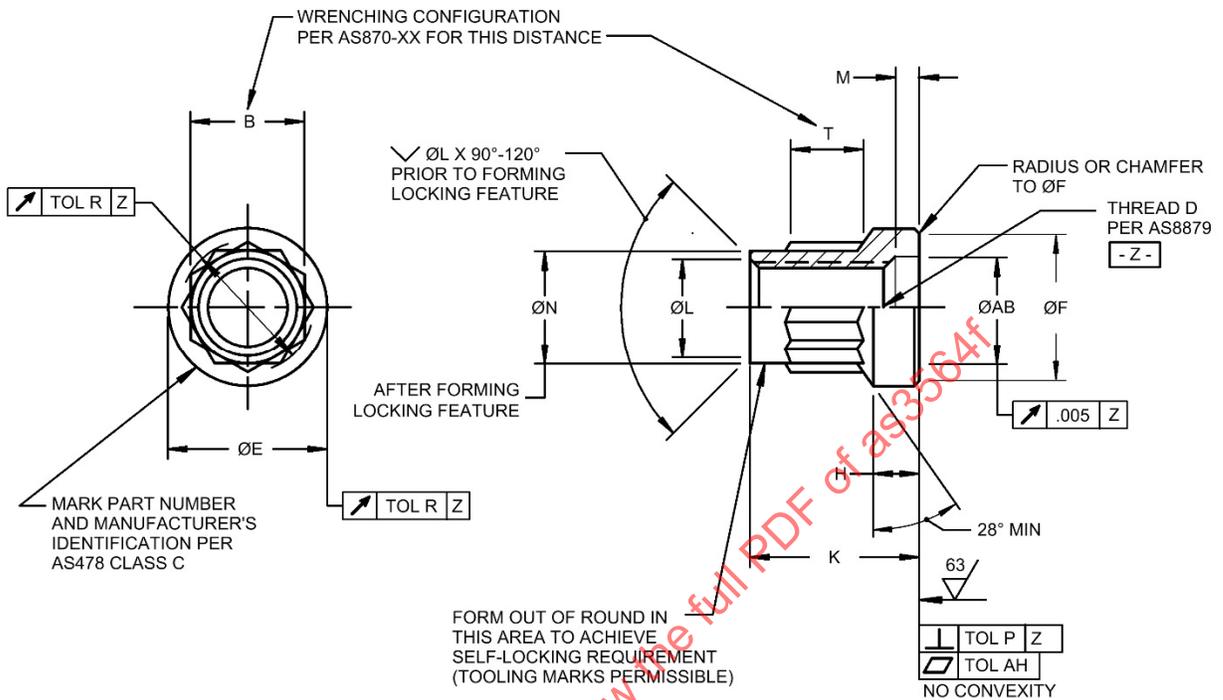


FIGURE 1 - NUT

TABLE 1A - DIMENSIONS

PART NUMBER	THREAD D	B NOM	AS870 DASH NO.		ØE MAX	ØF MIN	ØAB	H MIN	K MAX
AS3564-09	.1900-32UNJF-3B	.2500	08		.340	.325	.200-.210	.125	.400
AS3564-10	.2500-28UNJF-3B	.3125	10		.450	.410	.260-.270	.170	.510
AS3564-11	.3125-24UNJF-3B	.3750	12		.525	.495	.323-.333	.175	.580
AS3564-12	.3750-24UNJF-3B	.4375	14		.600	.560	.385-.395	.195	.645
AS3564-13	.4375-20UNJF-3B	.5625	18		.690	.650	.448-.458	.220	.745
AS3564-14	.5000-20UNJF-3B	.6250	20		.780	.740	.510-.525	.240	.830
AS3564-15	.5625-18UNJF-3B	.6875	22		.880	.840	.573-.583	.270	.928
AS3564-16	.6250-18UNJF-3B	.7812	25		.970	.925	.635-.645	.290	1.020
AS3564-17	.7500-16UNJF-3B	.9375	30		1.230	1.180	.760-.770	.320	1.222

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3564F/>

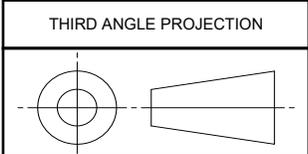

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS4393 /2/



AEROSPACE STANDARD

NUT, SELF-LOCKING, DOUBLE HEXAGON, SOLID
 FILM LUBRICATED, COUNTERBORED,
 160 KSI, 800 °F, UNS S66286

AS3564™
 SHEET 1 OF 2

REV.
 F

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.