

REV. A

SAE AS3626

FEDERAL SUPPLY CLASS
5310

RATIONALE

CHANGE PROCUREMENT SPECIFICATION FROM AS7251 TO AS4393.


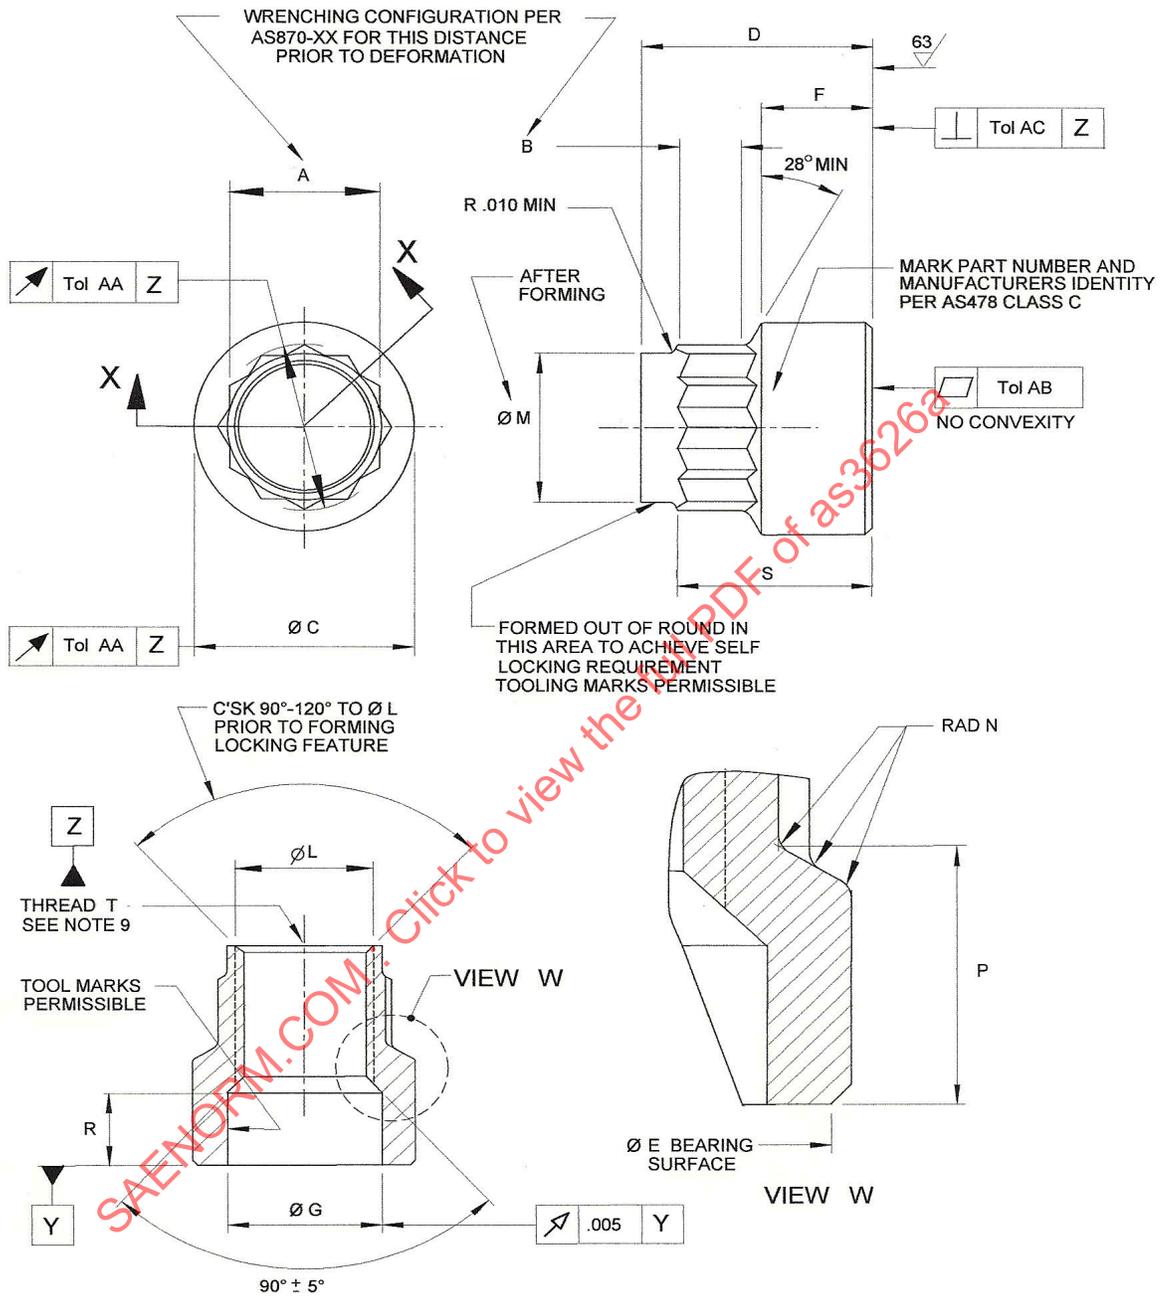


FIGURE 1 - NUT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3626A>

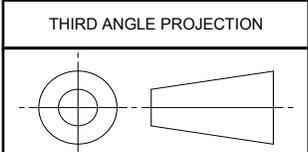

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS4393

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

NUT, SELF-LOCKING, DOUBLE HEXAGON, REDUCED ENVELOPE, UNS S66286, COUNTERBORED SILVER PLATED THREADS ONLY

SAE AS3626
SHEET 1 OF 3

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

Copyright 2012 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2011-06 REVISED 2012-04

TABLE 1A - DIMENSIONS T, AND A TO E

PART NUMBER	THREAD T PER AS8879	A		B MIN	C MAX	D	E MIN
		AS870 DASH NUMBER	NOMINAL SIZE				
AS3626-08	.1640-32 UNJF-3B	07	.2188	.070	.294	.250 - .290	.264
AS3626-09	.1900-32 UNJF-3B	08	.2500	.070	.355	.405 - .420	.325
AS3626-10	.2500-28 UNJF-3B	10	.3125	.095	.450	.485 - .515	.410
AS3626-11	.3125-24 UNJF-3B	12	.3750	.108	.535	.545 - .565	.495
AS3626-12	.3750-24 UNJF-3B	14	.4375	.147	.608	.645 - .665	.559
AS3626-13	.4375-20 UNJF-3B	18	.5625	.150	.692	.700 - .720	.652
AS3626-14	.5000-20 UNJF-3B	20	.6250	.176	.786	.755 - .775	.762
AS3626-15	.5625-18 UNJF-3B	22	.6875	.205	.880	.820 - .840	.840

TABLE 1B - DIMENSIONS F TO P

PART NUMBER	F	G	L	M MAX	N	P MAX
AS3626-08	.170 - .185	.177 - .187	.164 - .184	.229	.005 - .020	.215
AS3626-09	.195 - .210	.208 - .218	.190 - .210	.262	.005 - .030	.245
AS3626-10	.230 - .245	.271 - .281	.250 - .270	.326	.005 - .030	.295
AS3626-11	.260 - .275	.330 - .340	.312 - .332	.392	.005 - .035	.330
AS3626-12	.290 - .305	.389 - .399	.375 - .395	.458	.005 - .040	.365
AS3626-13	.315 - .330	.455 - .465	.438 - .458	.588	.005 - .040	.380
AS3626-14	.337 - .352	.520 - .530	.500 - .520	.654	.005 - .060	.392
AS3626-15	.380 - .395	.580 - .590	.562 - .582	.720	.005 - .070	.450

TABLE 1C - DIMENSIONS S TO AC, MASS

PART NUMBER	R	S	AA	AB	AC	APPROX MASS lb/100
AS3626-08	.150 - .170	.265 - .336	.005	.0012	.004	.32
AS3626-09	.165 - .185	.300 - .349	.006	.0014	.004	.41
AS3625-10	.177 - .197	.375 - .420	.007	.0014	.005	.81
AS3626-11	.195 - .215	.420 - .470	.008	.0016	.005	1.26
AS3626-12	.197 - .217	.485 - .554	.009	.0020	.005	1.61
AS3626-13	.240 - .260	.510 - .555	.010	.0020	.005	1.99
AS3626-14	.240 - .260	.577 - .627	.012	.0020	.006	3.40
AS3626-15	.267 - .287	.655 - .715	.014	.0020	.006	5.50