


RATIONALE

PROVIDE INDUSTRY WITH A KEY LOCKED INSERT THAT INCORPORATES A BOTTOM LOCKING FEATURE PROVIDING IMPROVED NUMBER OF BOLT INSTALLATION AND REMOVAL CYCLES.

AS3651

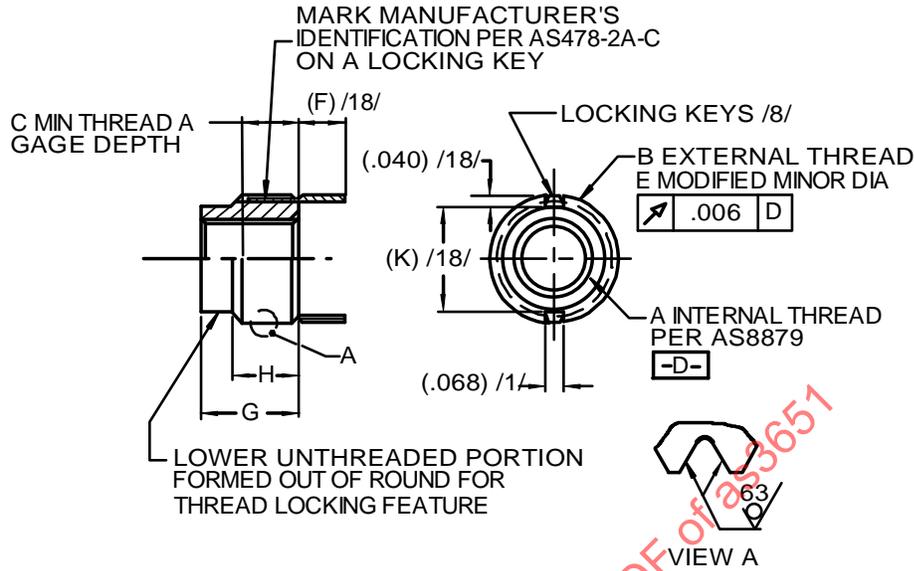

/18/ DIMENSION APPLIES TO LOCKING KEYS


FIGURE 1 - INSERT

TABLE 1 - DIMENSIONS

PART NUMBER	A INTERNAL THREAD AS8879 UNJF-3B	B EXTERNAL THREAD AS8879 EXCEPT MODIFIED MINOR DIAMETER	EXTERNAL THREAD MODIFIED MINOR DIAMETER E	F REF	G	H	K REF	C MIN GAGE DEPTH	NO OF KEYS /8/
AS3653-3	.1900 - 32	.3750-16 UNJC-3A	.312 - .320	.160	.360 - .390	.265 - .285	.284	.226	2
AS3653-4	.2500 - 28	.4375-14 UNJC-3A	.375 - .383	.190	.497 - .527	.360 - .390	.344	.324	2
AS3653-5	.3125 - 24	.5000-13 UNJC-3A	.432 - .440	.190	.695 - .725	.520 - .550	.407	.475	4
AS3653-6	.3750 - 24	.5625-12 UNJC-3A	.495 - .503	.190	.784 - .814	.581 - .611	.469	.536	4
AS3653-7	.4375 - 20	.6250-11 UNJC-3A	.551 - .565	.190	.875 - .905	.650 - .680	.532	.593	4
AS3653-8	.5000 - 20	.6875-12 UNJ-3A	.615 - .625	.190	.983 - 1.013	.723 - .753	.594	.666	4

PART NUMBER	APPROX MASS LB/100
AS3653-3	.69
AS3653-4	1.29
AS3653-5	2.50
AS3653-6	3.30
AS3653-7	4.88
AS3653-8	6.63

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3651>

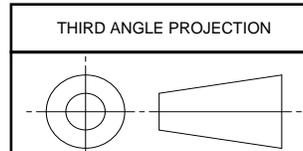

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS5887



AEROSPACE STANDARD

INSERT, SCREW THREAD, SHORT, SELF-LOCKING, KEY LOCKED, HEAVY DUTY, OVERSIZE SELF-BROACHING KEYS, UNS S66286

AS3651
SHEET 1 OF 2

ISSUED 2014-01

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.