


RATIONALE


REVISION REQUIRED TO ADD A PART NUMBER CROSS REFERENCE TABLE AND ADDITIONAL INFORMATION TO CLARIFY THE REQUIRED PROCUREMENT PART NUMBER, TO CORRECT DOCUMENT TITLE, AND TO UPDATE DOCUMENT/FIGURE FORMAT.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF: SAE AS39029.

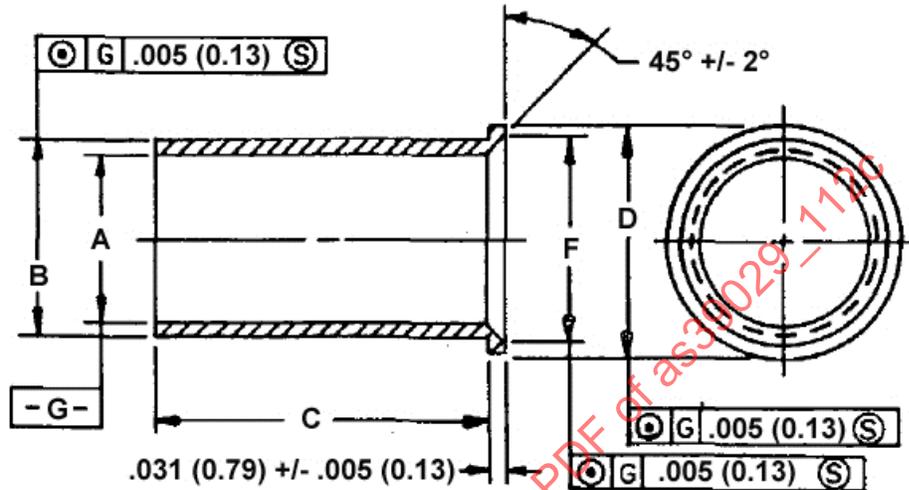

CONTACT BUSHING DESIGN

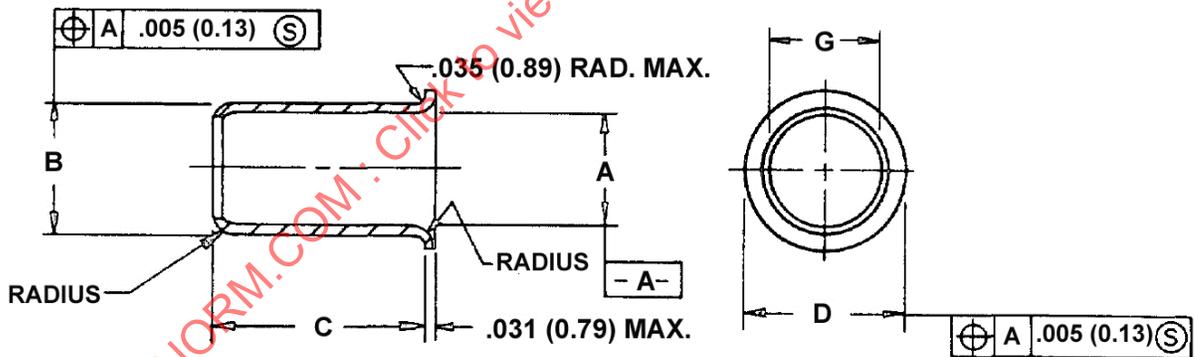


ALTERNATE CONTACT BUSHING DESIGN

FIGURE 1 - CONTACT BUSHING

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS39029/112C>

THIRD ANGLE PROJECTION

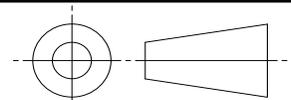

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS39029

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) CONTACT BUSHING,
ELECTRICAL CONNECTOR CONTACT,
WIRE BARREL

SAE AS39029/112
SHEET 1 OF 4

REV. C

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

REV. C

SAE AS39029/112

ISSUED 2007-03 REVISED 2013-01

TABLE 1 - CONTACT BUSHING DIMENSIONS

DASH NUMBER	CONTACT WIRE BARREL SIZE (REF)	WIRE SIZE (REF)	A +.002 (0.05) -.003 (0.08) DIA	B +.002 (0.05) -.003 (0.08) DIA	C +.017 (0.43) -.016 (0.41)	D ±.016 (0.41)	F +.006 (0.15) -.005 (0.13) DIA
-8 -10	8	10	.146 (3.71)	.173 (4.39)	.380 (9.65)	.250 (6.35)	.188 (4.78)
-6 -10L	6	10	.136 (3.45)	.225 (5.72)	.700 (17.78)	.297 (7.54)	.188 (4.78)
-6 -9L	6	9	.155 (3.94)	.225 (5.72)	.700 (17.78)	.297 (7.54)	.219 (5.56)
-6 -8L	6	8	.185 (4.70)	.225 (5.72)	.700 (17.78)	.297 (7.54)	.250 (6.35)
-4 -8L	4	8	.185 (4.70)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.250 (6.35)
-4 -6	4	6	.235 (5.97)	.272 (6.91)	.380 (9.65)	.344 (8.74)	.292 (7.42)
-4 -6L	4	6	.225 (5.72)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.292 (7.42)
-4 -5L	4	5	.250 (6.35)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.292 (7.42)
-1 -6L	1	6	.225 (5.72)	.396 (10.06)	.700 (17.78)	.516 (13.11)	.422 (10.72)
-1 -2L	1	2	.359 (9.12)	.396 (10.06)	.700 (17.78)	.516 (13.11)	.422 (10.72)
-0 -2	1/0	2	.369 (9.37)	.444 (11.28)	.536 (13.61)	.516 (13.11)	.462 (11.73)
-4/0 -2/0L	4/0	2/0	.500 (12.70)	.629 (15.98)	.700 (17.78)	.719 (18.26)	.562 (14.27)

TABLE 2 - ALTERNATE CONTACT BUSHING DESIGN DIMENSIONS

DASH NUMBER	CONTACT WIRE BARREL SIZE (REF)	WIRE SIZE (REF)	A +.002 (0.05) -.003 (0.08) DIA	B +.002 (0.05) -.003 (0.08) DIA	C +.010 (0.25)	D +.016 (0.41)	G DIA MIN
-8 -10	8	10	.146 (3.71)	.173 (4.39)	.380 (9.65)	.250 (6.35)	.136 (3.45)
-6 -10L	6	10	.136 (3.45)	.225 (5.72)	.700 (17.78)	.297 (7.54)	.136 (3.45)
-6 -9L	6	9	.155 (3.94)	.225 (5.71)	.700 (17.78)	.297 (7.54)	.155 (3.94)
-6 -8L	6	8	.185 (4.70)	.225 (5.71)	.700 (17.78)	.297 (7.54)	.185 (4.70)
-4 -8L	4	8	.185 (4.70)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.185 (4.70)
-4 -6	4	6	.235 (5.97)	.272 (6.91)	.380 (9.65)	.344 (8.74)	.225 (5.71)
-4 -6L	4	6	.225 (5.72)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.225 (6.35)
-4 -5L	4	5	.250 (6.35)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.250 (6.30)
-1 -6L	1	6	.225 (5.72)	.396 (10.06)	.700 (17.78)	.516 (13.11)	.225 (6.35)
-1 -2L	1	2	.359 (9.12)	.396 (10.06)	.700 (17.78)	.516 (13.11)	.359 (9.12)
-0 -2	1/0	2	.369 (9.37)	.444 (11.28)	.536 (13.61)	.516 (13.11)	.359 (9.12)
-4/0 -2/0L	4/0	2/0	.500 (12.70)	.629 (15.98)	.700 (17.78)	.719 (18.26)	.500 (12.70)

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.


1. DESIGN: CONTACTS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1 AND TABLES 1 AND 2. DIMENSIONS ARE IN INCHES. METRIC EQUIVALENTS ARE IN PARENTHESES, ARE GIVEN FOR GENERAL INFORMATION ONLY, AND BASED UPON 1.00 INCH = 25.4 MM. DIMENSIONS SHOWN APPLY AFTER PLATING. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5.
2. MATERIAL: COPPER ALLOY: ANNEAL TO ROCKWELL HARDNESS 15T 70 MAXIMUM IN ACCORDANCE WITH ASTM E18, EXCEPT THAT -1-6L SHALL BE ANNEALED TO ROCKWELL HARDNESS 15T 55 MAXIMUM IN ACCORDANCE WITH ASTM E18.
3. FINISH: BUSHINGS SHALL BE SILVER PLATED TO A MINIMUM THICKNESS OF .0002 INCH (0.005 MM) IN ACCORDANCE WITH ASTM B700 OR AMS-QQ-S-365 (AS AVAILABLE) OVER ELECTROLYTIC NICKEL UNDERPLATE OF 30 TO 150 (0.00076 TO 0.0038) MICROINCHES THICK PER AMS-QQ-N-290 OR OVER COPPER PLATE IN ACCORDANCE WITH AMS2418, .000050 INCH (0.00127 MM) THICK MINIMUM.
4. SURFACE TEXTURE: ALL EXTERNAL SURFACES SHALL BE 63 OR BETTER IN ACCORDANCE WITH ASME B46.1.
5. CONTACT BUSHINGS SHALL BE FREE OF ALL BURRS. BREAK ALL SHARP EDGES .005R MAXIMUM.
6. PART NUMBER CROSS REFERENCE: SEE TABLE 3.

TABLE 3 - PART NUMBER CROSS REFERENCE

DETAIL SHEET/DASH NUMBER (RECOMMENDED FOR NEW DESIGN)	REPLACEMENT APPLICATION PART NUMBER
AS39029/112-8-10	MS3348-8-10
AS39029/112-4-6	MS3348-4-6
AS39029/112-0-2	MS3348-0-2
AS39029/112-1-2L	MS3348-1-2L
AS39029/112-4-5L	MS3348-4-5L
AS39029/112-4-6L	MS3348-4-6L
AS39029/112-6-8L	MS3348-6-8L
AS39029/112-6-9L	MS3348-6-9L
AS39029/112-1-6L	MS3348-1-6L
AS39029/112-4/0-2/0L	MS3348-4/0-2/0L
AS39029/112-4-8L	MS3348-4-8L
AS39029/112-6-10L	MS3348-6-10L

7. QUALIFICATION REQUIREMENTS: QUALIFICATION SHALL BE BY CERTIFICATION IN ACCORDANCE WITH AS39029 AND HEREIN. CONTACT-SLEEVE COMBINATIONS SHALL MEET THE FOLLOWING REQUIREMENTS.
 - a. MATERIAL AND FINISH CERTIFICATIONS (SLEEVE ONLY)
 - b. EXAMINATION OF PRODUCT (SLEEVE ONLY)
 - c. AXIAL CONCENTRICITY-WIRED
 - d. CRIMP TENSILE STRENGTH
 - e. CONTACT RESISTANCE
 - f. CRIMP TOOL: IN ACCORDANCE WITH THE APPLICABLE CONTACT DETAIL SPECIFICATION FOR SIZES 8 TO 4/0 (SEE 8a).
 - g. PART NUMBER: THE AS39029/112 PART NUMBER IS RECOMMENDED FOR NEW DESIGN AND THE MS3348 PART NUMBER IS RECOMMENDED FOR REPLACEMENT APPLICATIONS ONLY. SEE TABLE 3 FOR PART NUMBER CROSS REFERENCE.

REPLACEMENT PART NUMBER:

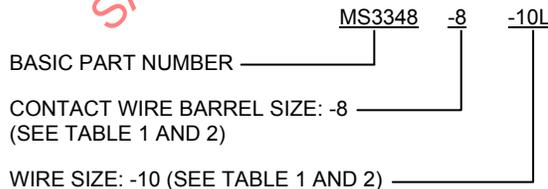

LETTER DESIGNATOR L MEANS APPLICABLE ONLY TO AS39029/48 AND /49 CONTACTS (SEE 8e)

 An SAE International Group	AEROSPACE STANDARD	SAE AS39029/112 SHEET 3 OF 4	REV. C
	(R) CONTACT BUSHING, ELECTRICAL CONNECTOR CONTACT, WIRE BARREL		