

REV. A

SAE AS39029/113


FEDERAL SUPPLY CLASS
5935

RATIONALE

THIS DOCUMENT WAS UPDATED TO ADD GO/NO-GO CALIBRATION PINS FOR CRIMP TOOLS, AND ADD AS9100 REQUIREMENTS.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS39029.

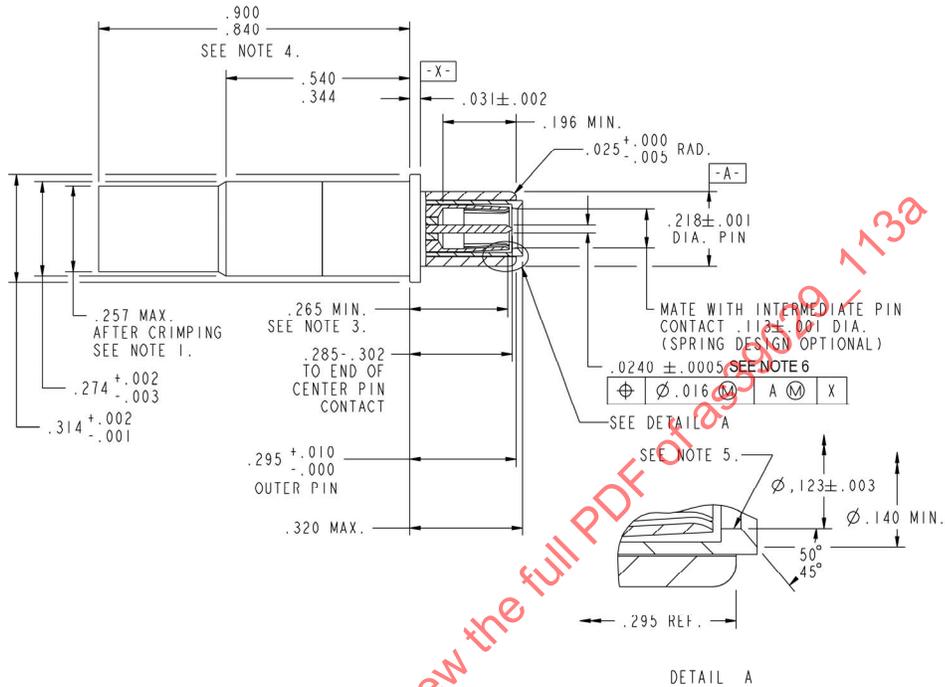


NOTES:

1. DIAMETER SHALL NOT EXCEED 0.276 IN (7.01 MM) OVER RECOVERED HEAT SHRINK BOOT. THIS MEASUREMENT TO BE MADE AFTER THE INSTALLATION OF THE BOOT. (SEE DRAWING AND FIGURE 5.)
2. DIMENSIONS SHOWN AFTER PLATING. THE DIMENSIONS OF CONTACT BIN CODE 625 AND CONTACT BIN CODE 626 ARE THE SAME. THE DIFFERENCE BETWEEN THE TWO CONTACTS IS THE TOOLING REQUIRED TO TERMINATE THEM. (SEE TABLE 8 AND REQUIREMENT 2.)
3. POINT AT WHICH SQUARE ENDED PIN OF THE SAME BASIC DIAMETER AS THE MATING CONTACT FIRST ENGAGES THE INTERMEDIATE CONTACT SPRING. (SEE REQUIREMENT 5.) PROVISIONS FOR CLEARANCE HOLE SHALL BE PROVIDED FOR THE TEST PIN. (SEE DRAWING AND FIGURE 6.)
4. MEASUREMENT SHALL BE TAKEN AFTER ASSEMBLY BUT BEFORE INSTALLATION OF THE HEAT SHRINK BOOT. MEASUREMENT SHALL INCLUDE CRIMP FERRULE. (SEE DRAWING.)
5. THE MINIMUM HARDNESS OF THE INSULATOR BETWEEN THE CENTER CONTACT AND THE INTERMEDIATE CONTACT SHALL BE ROCKWELL HARDNESS M90 WHEN TESTED PER ASTM D785. FOR QUALIFICATION, CERTIFICATION IS REQUIRED. (SEE REQUIREMENT 3.)
6. .008 MAXIMUM PERMISSIBLE PIN TIP FLAT.

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS39029/113A>

FIGURE 1 - CONCENTRIC TWINAX FINAL ASSEMBLY (SEE REQUIREMENT 2)

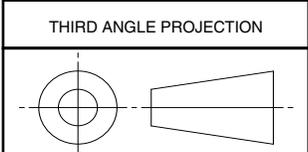

CUSTODIAN: SAE AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS39029

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
(R) CONTACT, ELECTRICAL CONNECTOR,
CONCENTRIC TWINAX, PIN, SIZE 8, MIL-DTL-38999
SERIES I, III, AND IV

SAE AS39029/113
SHEET 1 OF 12

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 2007-01 REVISED 2008-10

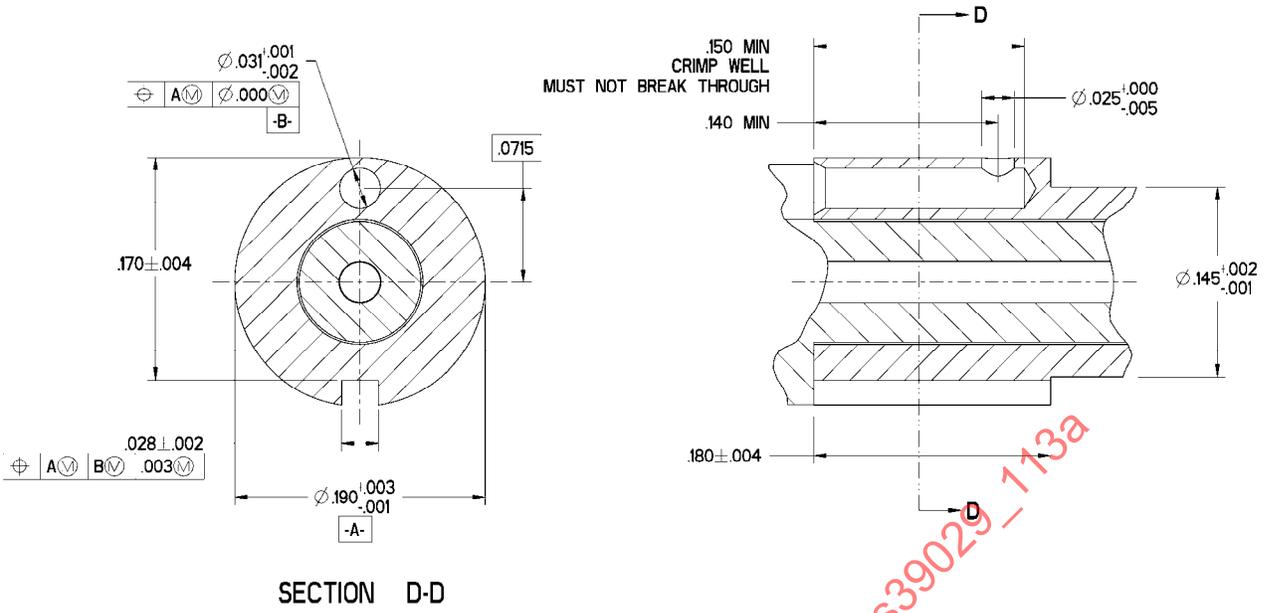


FIGURE 2 - BIN CODE 625: UNASSEMBLED CONCENTRIC TWINAX INTERMEDIATE CONTACT PIECE PART (SEE REQUIREMENT 2)


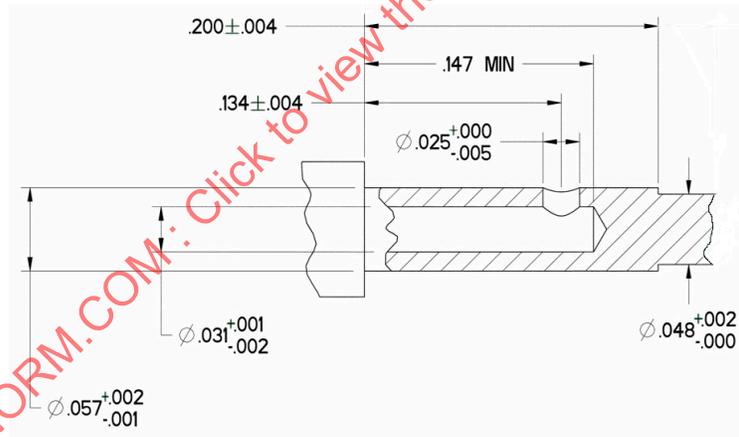


FIGURE 3 - BIN CODE 625: UNASSEMBLED CONCENTRIC TWINAX CENTER CONTACT PIECE PART - CRIMP AREA DETAILS (SEE REQUIREMENT 2)

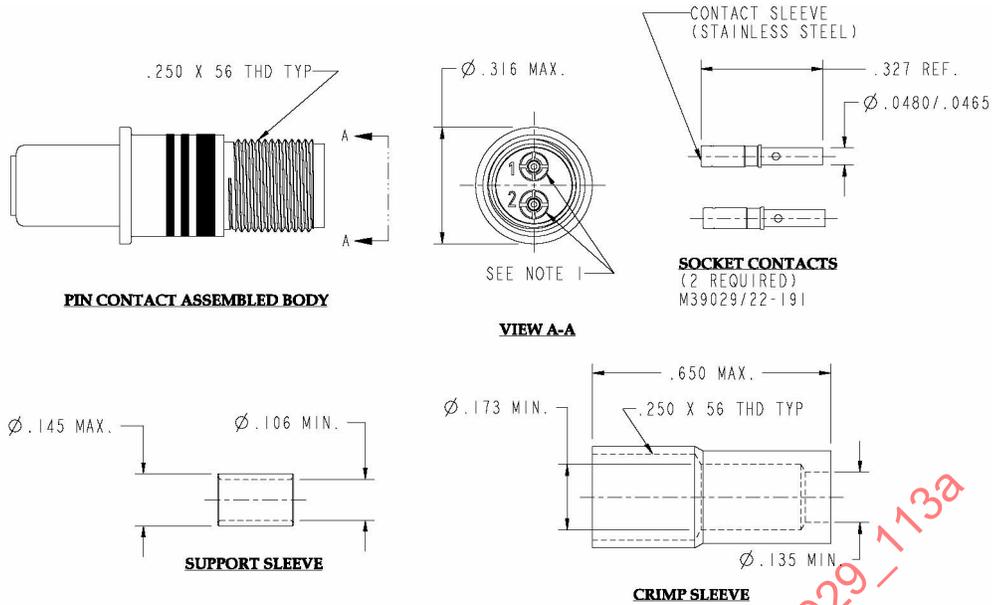


NOTES:

1. CAVITY MARKED "1" CONNECTS TO INNER CONTACT. CAVITY MARKED "2" CONNECTS TO INTERMEDIATE CONTACT.
2. CONTACTS MAY BE INSERTED BY HAND. CONTACTS MAY BE REMOVED USING MIL-I-81969/14-1 INSERTION/EXTRACTION TOOL.

FIGURE 4 - BIN CODE 626: UNASSEMBLED CONCENTRIC TWINAX PIECE PARTS (SEE REQUIREMENT 2)

INCHES	MM
.00	0.
.010	0.25
.03	0.8
.15	3.8
.25	6.4
.56	14.2
.90	22.9

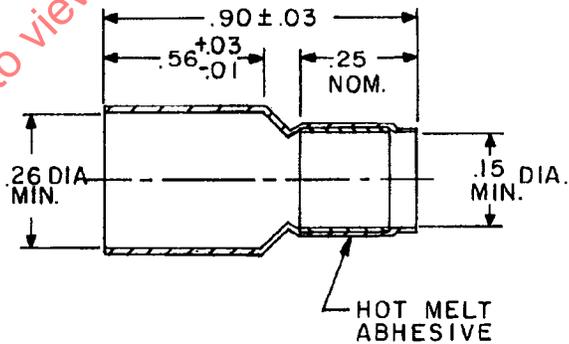

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.
3. ONE BOOT SHALL BE PROVIDED WITH EACH ASSEMBLY (FIGURE 1). REPLACEMENT BOOTS MAY BE ORDERED BY THE PART NUMBER SPECIFIED IN TABLE 9.

FIGURE 5 - HEAT SHRINK BOOT

REQUIREMENTS:

1. QUALIFICATION: CONTACTS SHALL COMPLY WITH THE REQUIREMENTS OF AS39029. CONTACTS SHALL BE QUALIFIED USING THE TOOLING DEFINED IN TABLE 8.

THE MANUFACTURER'S RELIABILITY ASSURANCE PROGRAM FOR AS39029/113 AND ASSEMBLY PROCEDURES SHALL COMPLY WITH THE AS9100 AEROSPACE STANDARD FOR QUALITY MANAGEMENT SYSTEM REQUIREMENTS. OTHER ESTABLISHED AND INDUSTRY RECOGNIZED QUALITY ASSURANCE STANDARDS THAT ASSURE ALL PRODUCTS PRODUCED CONFORM TO THE CONTRACT REQUIREMENTS ARE ACCEPTABLE. HOWEVER, IF USED, IT IS THE RESPONSIBILITY OF THE MANUFACTURER TO PROVIDE EVIDENCE OF COMPLIANCE TO AS9100. THE QUALIFYING ACTIVITY (QA) AUTHORITY RESERVES THE RIGHT TO MONITOR, MEASURE, AND VALIDATE COMPLIANCE AT THEIR DISCRETION.

2. DESIGN AND CONSTRUCTION:

THE MAXIMUM NUMBER OF PIECE PARTS IN THE ASSEMBLED CONTACT (FIGURE 1), EXCLUDING THE HEAT SHRINK BOOT, SHALL NOT EXCEED FIVE. THE CONTACT SHALL BE PROVIDED AS UNASSEMBLED PIECE PARTS IN ONE OF TWO DIFFERENT CONFIGURATIONS (BIN CODE 625 OR 626). BOTH CONFIGURATIONS ARE INTERCHANGEABLE IN THE FINAL ASSEMBLY (FIGURE 1). SOME PIECE PARTS OF BIN CODE 625 (FIGURES 2 AND 3) AND BIN CODE 626 (FIGURE 4) REQUIRES DIFFERENT CRIMP TOOLS PRIOR TO FINAL ASSEMBLY (SEE TABLE 8). SEE TABLE 1 FOR DESIGN CHARACTERISTICS.

ALL DIMENSIONS SHOWN AS INCHES AND APPLY AFTER PLATING

TABLE 1 - DESIGN CHARACTERISTICS

BIN CODE	COLOR BANDS			CONTACT CAVITY SIZE	CABLE ACCOMMODATED	TYPE	CLASS
	1ST	2ND	3RD				
625	BLUE	RED	GREEN	8	M17/176-00002	D	B
626	BLUE	RED	BLUE	8	M17/176-00002	D	B

ASSEMBLY PROCEDURE: MANUFACTURER'S RECOMMENDED ASSEMBLY INSTRUCTIONS, INCLUDING AN EXPLODED VIEW OF THE ASSEMBLY, SHALL BE SHIPPED WITH UNIT PACKAGE.

3. MATERIAL:

THE MINIMUM HARDNESS OF THE INSULATOR BETWEEN THE CENTER CONTACT AND THE INTERMEDIATE CONTACT SHALL BE ROCKWELL HARDNESS M90 WHEN TESTED PER ASTM D 785.

HEAT SHRINK BOOT: SHALL BE IN ACCORDANCE WITH SAE AMS-DTL-23053/8.

4. ELECTRICAL:

LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY): SEE TABLE 2.

TABLE 2 - LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY)

BIN CODE	CABLE ACCOMMODATED	MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	
		INITIAL	AFTER CONDITIONING
ALL	M17/176-00002	55	66

CONTACT RESISTANCE: SEE TABLE 3.

TABLE 3 - CONTACT RESISTANCE

BIN CODE	CONTACT	CABLE ACCOMMODATED	TEST CURRENT (AMPERES)	MAXIMUM VOLTAGE DROP (MILLIVOLTS)		
				25 °C, +3 °C, -0 °C		+175 °C, +3 °C, -0 °C
				INITIAL	AFTER CONDITIONING	AFTER CONDITIONING
ALL	CENTER	M17/176-00002	1.0	55	66	94
ALL	INTERMEDIATE	M17/176-00002	1.0	55	66	94
ALL	OUTER	M17/176-00002	12.0	75	90	128

DIELECTRIC WITHSTANDING VOLTAGE: SHALL BE AS SPECIFIED IN TABLE 4.

TABLE 4 - DIELECTRIC WITHSTANDING VOLTAGE

CONTACTS	TEST VOLTAGE (AC RMS)	
	SEA LEVEL	70000 FEET
CENTER TO INTERMEDIATE	1000	250
INTERMEDIATE TO OUTER	500	250

5. MECHANICAL:

CONTACT ENGAGEMENT AND SEPARATION FORCE: THE ENGAGEMENT AND SEPARATION FORCES SHALL BE TESTED WITH TEST PIN INSERTED A MINIMUM OF 0.070 IN. THE TEST PIN SHALL BE IN ACCORDANCE WITH FIGURE 6. ENGAGEMENT AND SEPARATION FORCES SHALL BE AS SPECIFIED IN TABLE 5.

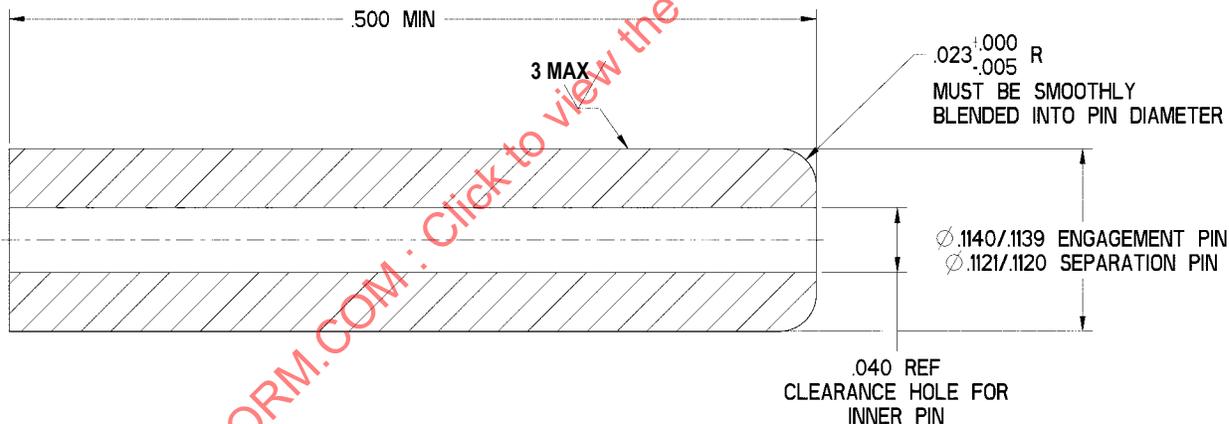


FIGURE 6 - ENGAGEMENT AND SEPARATION TEST PIN DIMENSIONS

TABLE 5 - CONTACT ENGAGEMENT AND SEPARATION FORCE

TEST PIN DIAMETER (INCH)	MINIMUM SEPARATION FORCE (OUNCES)		MAXIMUM ENGAGEMENT FORCE (OUNCES)		MAXIMUM AVERAGE ENGAGEMENT FORCE
	INITIAL	AFTER CONDITIONING	INITIAL	AFTER CONDITIONING	
.1140 +.0000 -.0001	NA	NA	18	22	NA
.1120 +.0001 -.0000	0.5	0.4	NA	NA	NA

CRIMP TENSILE STRENGTH (CENTER, INTERMEDIATE, AND OUTER CONTACT CRIMP JOINT): SEE TABLE 6.

TABLE 6 - CRIMP TENSILE STRENGTH (AT AMBIENT)

BIN CODE	CABLE ACCOMMODATED	AXIAL LOAD (POUNDS, MINIMUM)		
		CENTER CONTACT	INTERMEDIATE CONTACT	OUTER CONTACT
625	M17/176-00002	8	8	25
626	M17/176-00002	8	8	25

6. VIBRATION: THE VIBRATION SHALL BE IN ACCORDANCE WITH 39029 EXCEPT TEST CONDITION IV SHALL BE TEST CONDITION V. USE THE VIBRATION ENVELOPE SHOWN IN FIGURE 7.

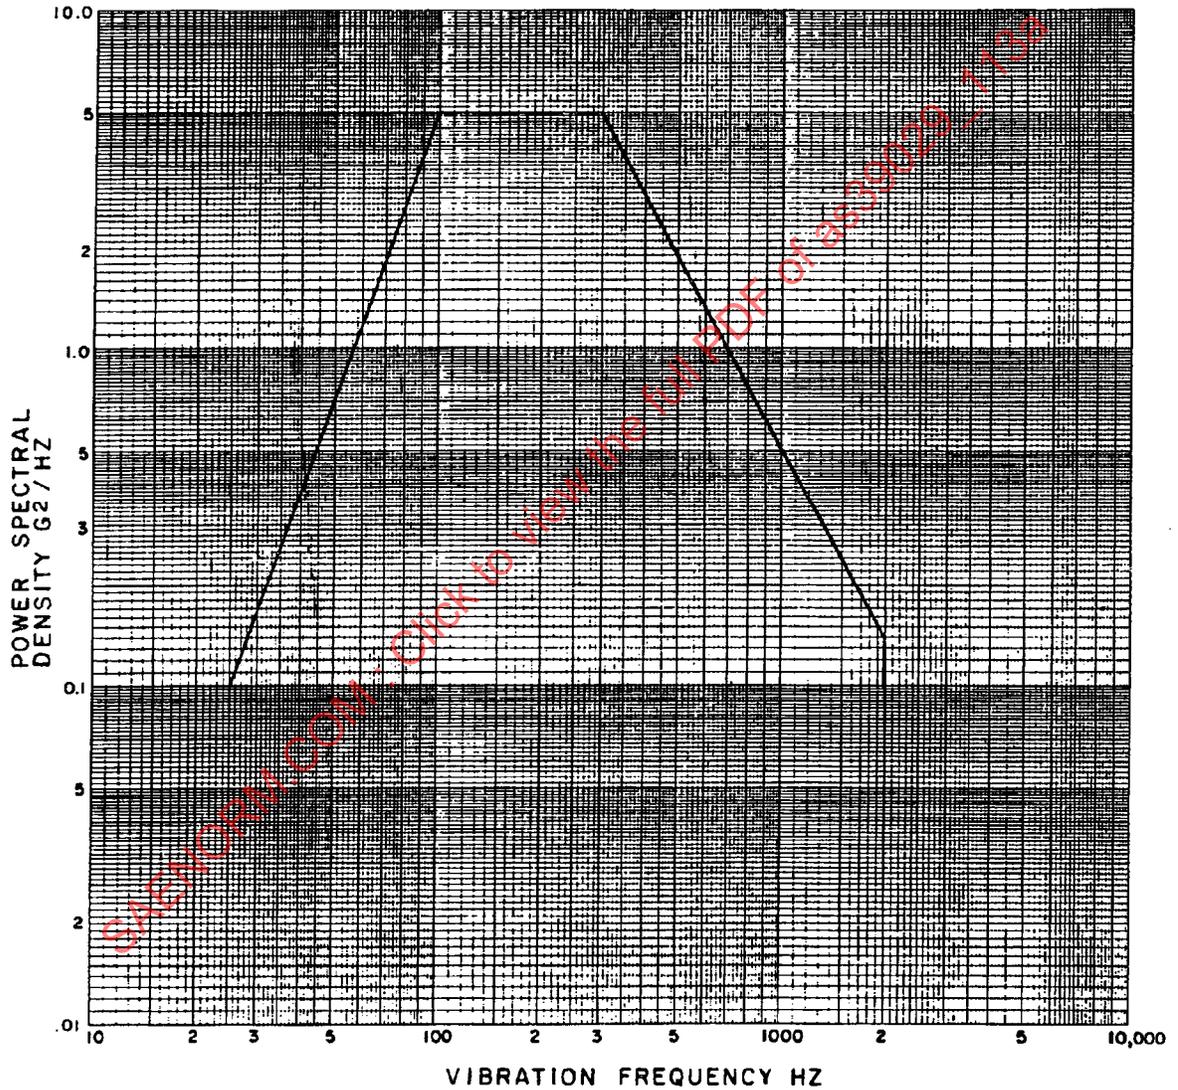


FIGURE 7 - VIBRATION ENVELOPE

7. SHOCK: THE SHOCK TEST SHALL BE RUN PER THE REQUIREMENTS OF MIL-DTL-38999 FOR SERIES III CONNECTORS. THE TEST SHALL BE RUN USING A MATED CONNECTOR PAIR WITH 25-20 INSERTS PER MIL-STD-1560. ALL THREE SIZE 8 CAVITIES ON THE PIN SIDE OF THE INTERFACE SHALL CONTAIN AS39029/113 CONTACTS AND ALL THREE SIZE 8 CAVITIES ON THE SOCKET SIDE OF THE INTERFACE SHALL CONTAIN AS39029/114 CONTACTS. AT LEAST 80% OF THE REMAINING CONTACTS MUST BE WIRED.
8. TOOLS: SHALL BE AS SPECIFIED IN TABLES 7 AND 8.

TABLE 7 - TOOLS (INSTALLING AND REMOVAL)

BIN CODE	INSTALLING AND REMOVAL TOOL
ALL	M81969/14-12

TABLE 8 - CRIMPING TOOLS (SEE APPENDIX A)

BIN CODE	CENTER CONTACT TOOLING		INTERMEDIATE CONTACT TOOLING		OUTER CRIMP SLEEVE TOOLING	
	BASIC CRIMPING TOOL	CONTACT POSITIONER	BASIC CRIMPING TOOL	DIE PART NO.	BASIC CRIMPING TOOL	DIE PART NO.
625	M22520/2-01	M22520/2-37	M22520/5-01	M22520/5-105	M22520/5-01	M22520/5-105

BIN CODE	WIRE CONTACT TOOLING		CRIMP SLEEVE TOOLING	
	BASIC CRIMPING TOOL	CONTACT POSITIONER	BASIC CRIMPING TOOL	DIE PART NO.
626	M22520/2-01	M22520/2-38	M22520/5-01	M22520/5-106

9. PART NUMBER: SEE TABLE 9.

TABLE 9 - PART NUMBER

BIN CODE	PART NUMBER	BOOT PART NUMBER
625	M39029/113-625	M39029/113-BT1
626	M39029/113-626	M39029/113-BT1

APPLICATION NOTES:

1. THIS CONTACT IS DESIGNED FOR USE IN MIL-STD-38999 SERIES I, III, AND IV CONNECTORS WITH 25-20 INSERTS PER MIL-STD-1560.
2. TEMPERATURE RATING: -65 TO +175 °C
3. CONTACT M39029/113-625 OR M39029/113-626 MAY BE USED IN PLACE OF M39029/90-529 WHERE THE LATTER IS SPECIFIED ON THE ENGINEERING DRAWING. CONTACT M39029/113-626 USES DIFFERENT TERMINATION TOOLING THAN THAT REQUIRED BY THE M39029/90-529 AND M39029/113-625.
4. CONTACT MATES DIRECTLY INTO AN AS39029/114 SOCKET AS SHOWN IN TABLE 10.

TABLE 10 - CONTACT MATING PART NUMBERS

AS39029/113 BIN CODE	MATING AS39029 BIN CODE
625	M39029/114-628 M39029/114-629 M39029/91-530
626	M39029/114-628 M39029/114-629 M39029/91-530

5. INSERTION LOSS NOT APPLICABLE.

SPECIFICATION NOTE:

1. A CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT, INCLUDING TECHNICAL REVISIONS. CHANGE BARS AND (R) ARE NOT USED IN ORIGINAL PUBLICATIONS, NOR IN DOCUMENTS THAT CONTAIN EDITORIAL CHANGES ONLY.

SAENORM.COM : Click to view the full PDF of as39029_1130

 An SAE International Group	AEROSPACE STANDARD	 AS39029/113 SHEET 8 OF 12	REV. A
	(R) CONTACT, ELECTRICAL CONNECTOR, CONCENTRIC TWINAX, PIN, SIZE 8, MIL-DTL-38999 SERIES I, III, AND IV		

APPENDIX A - REQUIRED TOOLING

POSITIONERS, DIES, AND GAGES ARE INCLUDED IN THIS SPECIFICATION FOR REFERENCE ONLY. WHEN THEY BECOME PUBLISHED IN MIL-DTL-22520, AND A QPL SOURCE IS ESTABLISHED, APPENDIX A WILL BE SUPERSEDED, AND NO LONGER VALID. UNTIL THAT TIME, POSITIONERS, DIES, AND GAGES OBTAINED FROM KNOWN MIL-DTL-22520 SOURCES MAY BE USED WITH QPL LISTED TOOL FRAMES TO TERMINATE THESE CONTACTS.

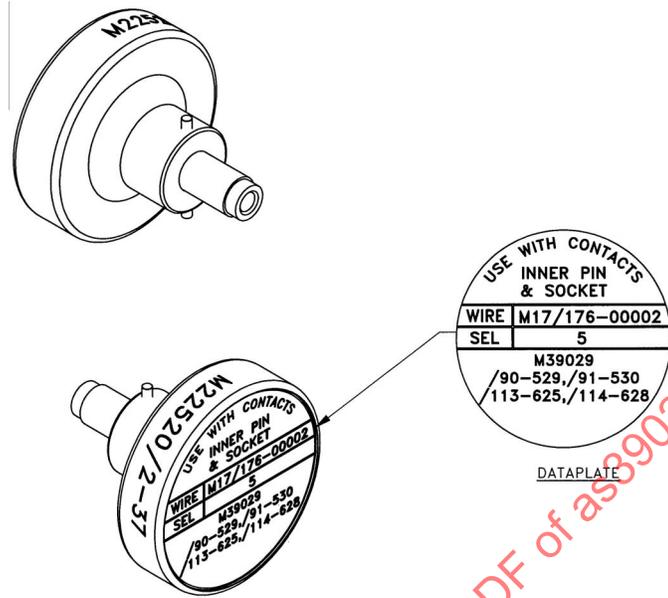


FIGURE 1 - GRAPHIC OF M22520/2-37 POSITIONER

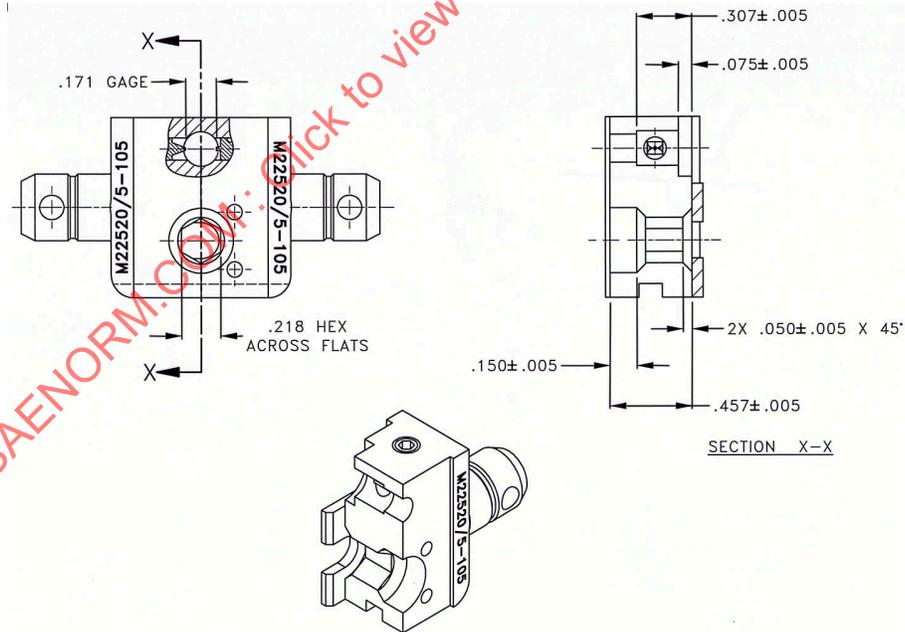


FIGURE 2 - GRAPHIC OF M22520/5-105 DIE

 <p>SAE Aerospace An SAE International Group</p>	<p>AEROSPACE STANDARD (R) CONTACT, ELECTRICAL CONNECTOR, CONCENTRIC TWINAX, PIN, SIZE 8, MIL-DTL-38999 SERIES I, III, AND IV</p>	<p>SAE AS39029/113 SHEET 9 OF 12</p>	<p>REV. A</p>