

RATIONALE

A LIMITED SCOPE REVISION IS REQUIRED TO CORRECT DIMENSIONAL/INFORMATIONAL ERRORS IN FIGURE 2 (DIMENSION A AND DIMENSION F/INSPECTION HOLE NOTE ARE MISSING).

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.

REV.  
E

AS39029™/22

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


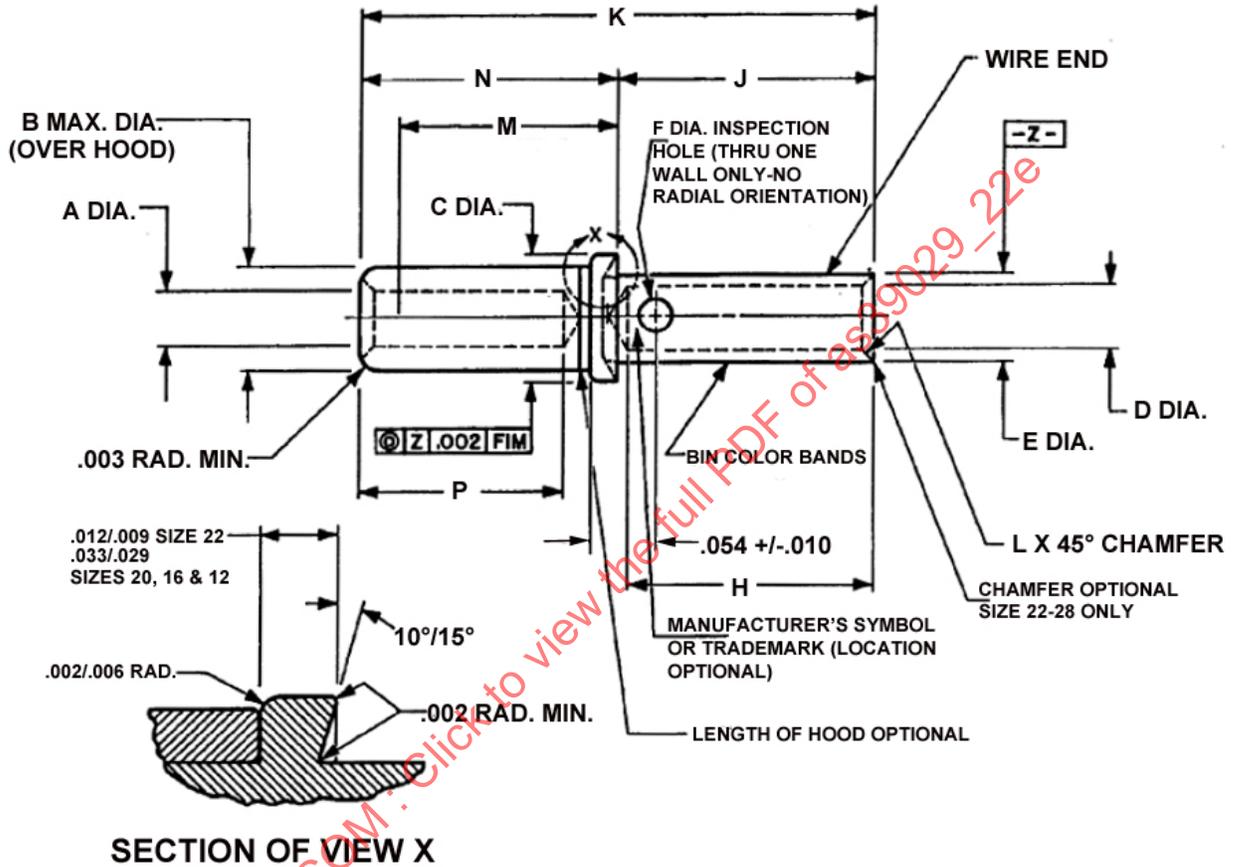


FIGURE 1 - CONTACT CONFIGURATIONS, SOCKET SIZE 22, 20, 16

For more information on this standard, visit  
<https://www.sae.org/standards/content/AS39029/22E/>

THIRD ANGLE PROJECTION

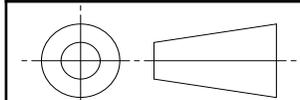

CUSTODIAN: AE-8C1

PROCUREMENT SPECIFICATION: AS39029



**AEROSPACE STANDARD**

CONTACTS, ELECTRICAL, CONNECTOR,  
SOCKET, CRIMP REMOVABLE (FOR AS81714  
TERMINAL JUNCTION SYSTEM SERIES II)

AS39029™/22  
SHEET 1 OF 5

REV.  
E

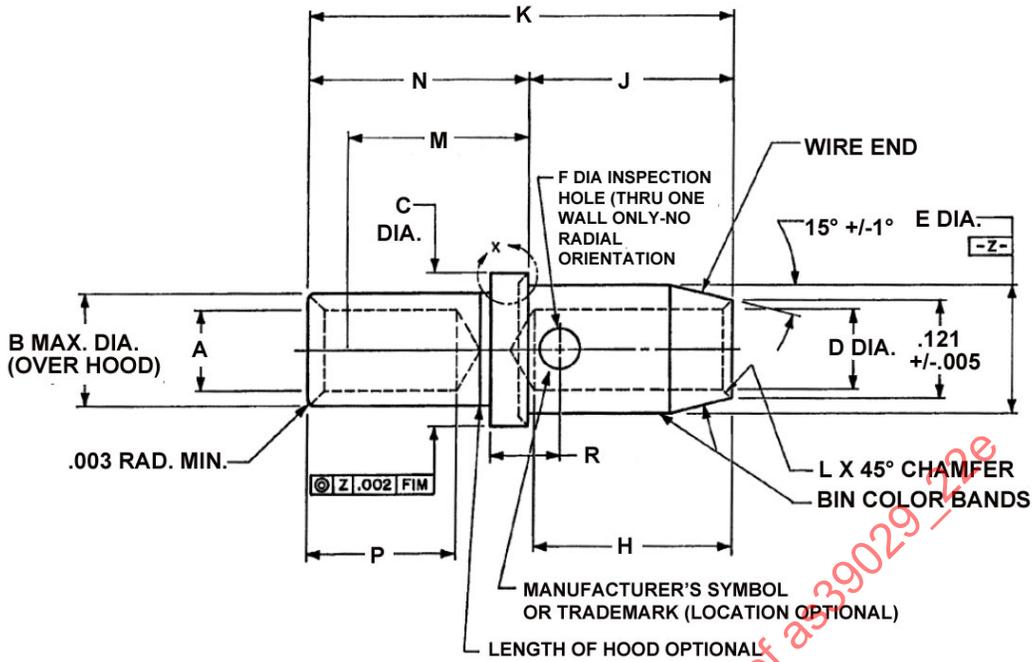


FIGURE 2 - CONTACT CONFIGURATIONS, SOCKET SIZE 12

TABLE 1 - FIGURES 1 AND 2 METRIC EQUIVALENTS

| INCH | MILLIMETER | INCH | MILLIMETER | INCH | MILLIMETER | INCH | MILLIMETER |
|------|------------|------|------------|------|------------|------|------------|
| .002 | 0.05       | .006 | 0.15       | .012 | 0.30       | .054 | 1.37       |
| .003 | 0.08       | .009 | 0.23       | .029 | 0.74       | .121 | 3.07       |
| .005 | 0.13       | .010 | 0.25       | .033 | 0.84       |      |            |

TABLE 2 - FIGURES 1 AND 2 DIMENSIONS

| BIN CODE | A DIA           | B DIA MAX      | C DIA           | D DIA           | E DIA           | F DIA          | H | J | K REF          | L CHAM                           | M MIN          | N | P | R |
|----------|-----------------|----------------|-----------------|-----------------|-----------------|----------------|---|---|----------------|----------------------------------|----------------|---|---|---|
| 190      | .033<br>(0.84)  | .060<br>(1.52) | .0615<br>(1.56) | .0200<br>(0.51) | .0480<br>(1.22) | .017<br>(0.43) |   |   |                |                                  |                |   |   |   |
|          | .0180<br>(0.46) |                |                 | .013<br>(0.33)  |                 |                |   |   |                |                                  |                |   |   |   |
| 191      | .031<br>(0.79)  |                | .0600<br>(1.52) | .0355<br>(0.90) | .0465<br>(1.18) | .022<br>(0.56) |   |   | .327<br>(8.31) | .006<br>(0.15)<br>.003<br>(0.08) | .130<br>(3.30) |   |   |   |
|          | .0335<br>(0.85) |                |                 | .018<br>(0.46)  |                 |                |   |   |                |                                  |                |   |   |   |
| 192      | .044<br>(1.12)  | .076<br>(1.93) | .094<br>(2.39)  | .048<br>(1.22)  | .070<br>(1.78)  | .027<br>(0.69) |   |   |                |                                  |                |   |   |   |
|          | .042<br>(1.07)  |                |                 | .091<br>(2.31)  |                 |                |   |   |                |                                  |                |   |   |   |
| 193      | .066<br>(1.68)  | .108<br>(2.74) | .130<br>(3.30)  | .068<br>(1.73)  | .103<br>(2.62)  | .023<br>(0.58) |   |   | .349<br>(8.86) | .010<br>(0.25)<br>.005<br>(0.13) | .150<br>(3.81) |   |   |   |
|          | .064<br>(1.63)  |                |                 | .127<br>(3.23)  |                 |                |   |   |                |                                  |                |   |   |   |
| 605      | .100<br>(2.54)  | .168<br>(4.27) | .171<br>(4.34)  | .102<br>(2.59)  | .152<br>(3.86)  | .030<br>(0.76) |   |   |                |                                  |                |   |   |   |
|          | .097<br>(2.46)  |                |                 | .168<br>(4.27)  |                 |                |   |   |                |                                  |                |   |   |   |

**TABLE 3 - DESIGN CHARACTERISTICS**

| BIN CODE | COLOR BANDS |       |        | MATING END SIZE | WIRE BARREL SIZE | TYPE | CLASS |
|----------|-------------|-------|--------|-----------------|------------------|------|-------|
|          | 1ST         | 2ND   | 3RD    |                 |                  |      |       |
| 1/ 190   | BROWN       | WHITE | BLACK  | 22              | 28               | A    | B     |
| 191      | BROWN       | WHITE | BROWN  | 22              | 22               |      |       |
| 192      | BROWN       | WHITE | RED    | 20              | 20               |      |       |
| 193      | BROWN       | WHITE | ORANGE | 16              | 16               |      |       |
| 605      | BLUE        | BLACK | GREEN  | 12              | 12               |      |       |

1/ SEE APPLICATION NOTE.

**TABLE 4 - TOOLS**

| BIN CODE | BASIC CRIMPING TOOL | POSITIONER  | INSTALLING TOOL (REF) 1/ | REMOVAL TOOL (REF) 1/ |
|----------|---------------------|-------------|--------------------------|-----------------------|
| -190     | M22520/7-01         | M22520/7-11 | M81969/14-01             | M81969/14-01          |
| -191     |                     |             | M81969/8-01              | M81969/8-02           |
| -192     |                     | M22520/7-12 | M81969/8-301             | M81969/8-302          |
|          |                     |             | M81969/14-01             | M81969/14-01          |
| -193     | M22520/7-13         | M22520/7-13 | M81969/8-03              | M81969/8-04           |
|          |                     |             | M81969/8-303             | M81969/8-304          |
|          |                     |             | M81969/14-10             | M81969/14-10          |
|          |                     |             | M81969/8-05              | M81969/8-06           |
| -605     | M22520/1-01         | M22520/1-18 | M81969/8-205             | M81969/8-206          |
|          |                     |             | M81969/8-305             | M81969/8-306          |
|          |                     |             | M81969/14-03             | M81969/14-03          |
|          |                     |             | M81969/8-07              | M81969/8-08           |
|          |                     |             | M81969/8-207             | M81969/8-208          |
| -605     | M22520/1-01         | M22520/1-18 | M81969/8-307             | M81969/8-308          |
|          |                     |             | M81969/8-09              | M81969/8-10           |
|          |                     |             | M81969/8-309             | M81969/8-310          |
| -605     | M22520/1-01         | M22520/1-18 | M81969/8-209             | M81969/8-210          |
|          |                     |             | M81969/16-03             | M81969/16-03          |

1/ SEE THE APPLICATION NOTE FOR THE APPLICABLE PRODUCT SPECIFICATION.

**TABLE 5 - CONTACT RESISTANCE**

| ENGAGING END SIZE | WIRE SIZE RANGE | TEST CURRENT (AMPERES) | MAXIMUM VOLTAGE DROP (MILIVOLTS) |                                 |                     |
|-------------------|-----------------|------------------------|----------------------------------|---------------------------------|---------------------|
|                   |                 |                        | 25 °C ± 3 °C                     | 25 °C ± 3 °C AFTER CONDITIONING | 200 °C +3 °C, -0 °C |
| 22                | 28              | 1.5                    | 60                               | 70                              | 100                 |
|                   | 32              | 1.0                    | 95                               | 105                             | 135                 |
| 22                | 22              | 5.0                    | 70                               | 80                              | 120                 |
|                   | 26              | 2.0                    | 60                               | 70                              | 100                 |
| 20                | 20              | 7.5                    | 55                               | 65                              | 95                  |
|                   | 24              | 3.0                    | 45                               | 55                              | 80                  |
| 16                | 16              | 13.0                   | 50                               | 60                              | 85                  |
|                   | 20              | 7.5                    | 45                               | 55                              | 80                  |
| 12                | 12 1/           | 23.0                   | 60                               | 70                              | 100                 |
|                   | 14              | 17.0                   | 55                               | 65                              | 95                  |

1/ SILVER PLATED WIRE.

**TABLE 6 - CONTACT ENGAGEMENT AND SEPERATION FORCE**

| SOCKET ENGAGING END SIZE | TEST PIN DIAMETER  |                    |
|--------------------------|--------------------|--------------------|
|                          | MIN +.0001, -.0000 | MAX +.0000, -.0001 |
| 22                       | .0295              | .0305              |
| 20                       | .0395              | .0405              |
| 16                       | .0615              | .0625              |
| 12                       | .0935              | .0945              |

**TABLE 7 - PROBE DAMAGE**

| SOCKET ENGAGING<br>END SIZE | TEST PROBE DIAMETER | BENDING MOMENT     |                       |
|-----------------------------|---------------------|--------------------|-----------------------|
|                             |                     | DEPTH OF INSERTION | MOMENT<br>(MAX IN-LB) |
| 22                          | .0305               | .105               | .10                   |
|                             | .0295               | .095               |                       |
| 20                          | .0405               | .135               | .25                   |
|                             | .0395               | .125               |                       |
| 16                          | .0625               | .185               | .37                   |
|                             | .0615               | .175               |                       |
| 12                          | .0935               | .185               | .55                   |
|                             | .0945               | .175               |                       |

**TABLE 8 - TENSILE STRENGTH**

| WIRE<br>BARRELL<br>SIZE | WIRE<br>SIZE<br>(AWG) | AXIAL LOAD (POUNDS)                 |                                |                                |                                | 1/ MAXIMUM<br>RECOMMENDED<br>CRIMP BARREL<br>GROWTH PER DIA |
|-------------------------|-----------------------|-------------------------------------|--------------------------------|--------------------------------|--------------------------------|---|
|                         |                       | SILVER OR TIN PLATED<br>COPPER WIRE |                                | NICKEL PLATED COPPER<br>WIRE   |                                |   |
|                         |                       | INITIAL<br>CONDITION<br>VALUES      | THERMAL<br>CONDITION<br>VALUES | INITIAL<br>CONDITION<br>VALUES | THERMAL<br>CONDITION<br>VALUES |   |
| 28                      | 28                    | 2.7                                 | 2                              | 1.7                            | 1.28                           | .0015   |
|                         | 32                    | 1.0                                 | .75                            | 1.0                            | .75                            |   |
| 22                      | 22                    | 12.0                                | 7.5                            | 8.0                            | 6                              | .0030   |
|                         | 26                    | 5.0                                 | 4                              | 3.0                            | 2.5                            |   |
| 20                      | 20                    | 20.0                                | 14                             | 10.0                           | 7.5                            | .0050   |
|                         | 24                    | 8.0                                 | 6                              | 6.0                            | 4.5                            |   |
| 16                      | 16                    | 50.0                                | 37                             | 29.0                           | 21                             | .0070   |
|                         | 20                    | 20.0                                | 14                             | 10.0                           | 7.5                            |   |
| 12                      | 12                    | 100.0                               | 85                             | 65.0                           | 55                             | .0070   |
|                         | 14                    | 60.0                                | 52                             | 34.0                           | 30                             |   |

1/ UNTIL A TEST METHOD IS DEFINED FOR VERIFICATION, THE MAXIMUM GROWTH DIAMETER WILL REMAIN A RECOMMENDATION RATHER THAN A REQUIREMENT.

**TABLE 9 - PART NUMBER**

| AS39029 PART<br>NUMBER | BIN<br>CODE | SUPERSEDED<br>PART NUMBER(S)               |
|------------------------|-------------|--|
| M39029/22-190          | 190         | M39029/22-22-28<br>M39029/15-22-28         |
| M39029/22-191          | 191         | M39029/22-22-22<br>M39029/15-22-22         |
| M39029/22-192          | 192         | M39029/22-20-20                            |
| M39029/22-193          | 193         | M39029/22-16-16                            |
| M39029/22-605          | 605         | AIR FORCE LOGISTIC COMMAND<br>B2070520-2-1 |

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.

1. DESIGN:

CONTACTS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURES 1 AND 2 AND TABLES 2 AND 3. DIMENSIONS ARE IN INCHES. DIMENSIONS SHOWN APPLY AFTER PLATING. DIMENSION "M" IS THE DISTANCE BETWEEN REAR OF CONTACT SHOULDER AND POINT AT WHICH A GAGE PIN, OF SAME BASIC DIAMETER AS MATING PIN CONTACT AND A SQUARE FACE, FIRST ENGAGES SOCKET CONTACT SPRING MEMBER. THE MAXIMUM ALLOWABLE GAP BETWEEN THE HOOD AND BODY OF THE CONTACT IS .010 INCH. AXIAL CONCENTRICITY: ALL DIAMETERS TO BE CONCENTRIC WITHIN .004 FIM EXCEPT AS NOTED.

2. TOOLS:

TOOLS REQUIRED FOR CRIMPING CONTACTS TO WIRE/CABLE AND THE INSTALLING/REMOVAL FROM THE CONNECTOR SHALL BE IN ACCORDANCE WITH TABLE 4.

3. PART NUMBERS:

CONTACT PART NUMBERS SHALL BE IN ACCORDANCE WITH TABLE 9. SUPERSEDED PART NUMBERS ARE AS SPECIFIED.

|   |   |                                    |                         |
|---|---|------------------------------------|-------------------------|
|  | <b>AEROSPACE STANDARD</b>   | <b>AS39029™/22</b><br>SHEET 4 OF 5 | <b>REV.</b><br><b>E</b> |
|   | CONTACTS, ELECTRICAL, CONNECTOR,<br>SOCKET, CRIMP REMOVABLE (FOR AS81714<br>TERMINAL JUNCTION SYSTEM SERIES II) |                                    |                         |