

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A
AS39029/23

FEDERAL SUPPLY CLASS
5935

RATIONALE


THE C1 COMMITTEE HAS RECOMMENDED STABILIZATION OF THIS DOCUMENT BASED ON NO QPL SOURCES AND NO KNOWN USAGE. ANY EDITORIAL OR TECHNICAL CHANGES NEEDED TO ALIGN THIS DOCUMENT WITH SIMILAR CURRENTLY PUBLISHED DETAIL SHEETS SHALL BE MADE AT SUCH TIME A POTENTIAL SOURCE REQUESTS AUTHORIZATION TO QUALIFY TO THIS DOCUMENT.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8C1 CONNECTORS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as39029_23a

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS39029/23a>

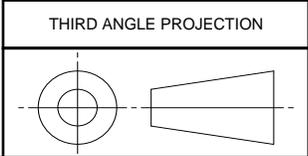

CUSTODIAN: AE-8/AE-8C1

	AEROSPACE STANDARD	AS39029/23	REV. A
	CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SHIELDED (FOR MIL-C-26482 SERIES 1 CONNECTORS)		

ISSUED 2000-06 REAFFIRMED 2007-06 STABILIZED 2013-12

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/23B, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/23B, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029_23b

	AEROSPACE STANDARD	AS39029/23 SHEET 1 OF 3	REV. A
	CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SHIELDED (FOR MIL-C-26482 SERIES 1 CONNECTORS)		

THE COMPLETE REQUIREMENTS FOR PROCURING THE CONTACTS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-C-39029.

MIL-C-39029/23B, DATED 25 APRIL 1980, HAS BEEN REVIEWED AND DETERMINED TO BE VALID FOR USE IN ACQUISITION.

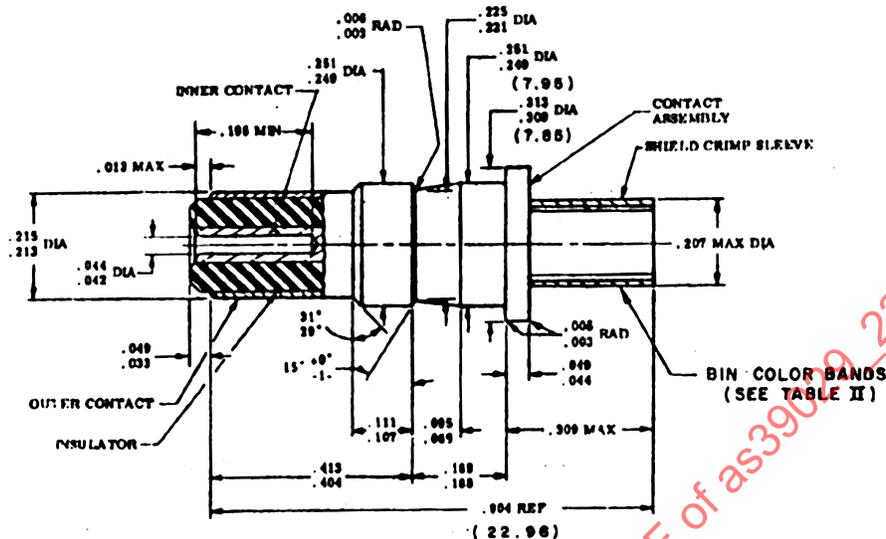

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.049	1.24	.105	2.67	.213	5.41
.004	.10	.060	1.52	.106	2.69	.215	5.46
.005	.13	.063	1.60	.107	2.72	.221	5.61
.006	.15	.068	1.73	.110	2.79	.225	5.72
.0063	.160	.078	1.98	.111	2.82	.249	6.32
.0067	.170	.082	2.08	.116	2.95	.251	6.38
.0079	.201	.089	2.26	.137	3.48	.309	7.85
.013	.33	.090	2.29	.141	3.58	.313	7.95
.033	.84	.095	2.41	.170	4.32	.404	10.26
.039	.99	.096	2.44	.185	4.70	.413	10.49
.042	1.07	.100	2.54	.189	4.80	.904	22.96
.044	1.12	.103	2.62	.207	5.26		

- NOTES:
1. Dimensions are in inches.
 2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
 3. Metric equivalents are in parentheses for overall length and diameter only.
 4. Dimensions shown apply after plating.

FIGURE 1. CONNECTOR CONTACT.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and tables I and II.

Mating contact: See table I.

Assembly instructions: Manufacturer's recommended assembly instructions shall be shipped with unit package.

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Part number: See table III.