

REV.
A

SAE AS39029/64


FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISE TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT AND INDUSTRY, REMOVE GOVERNMENT JARGON, UPDATE REFERENCES, ALIGN SPECIFICATION WITH SAE GUIDELINES, ADD NEW PART NUMBERS FOR NON-MAGNETIC CONNECTOR APPLICATIONS AND REVIEW SPECIFICATION FOR KNOWN TECHNICAL PROBLEMS.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF SAE AS39029.

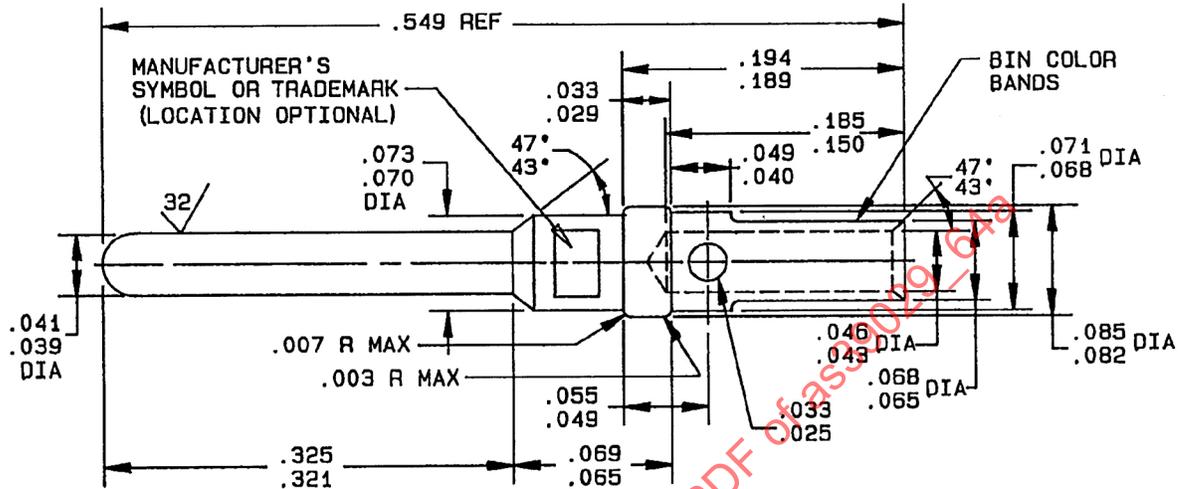


| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|--------|------|--------|------|--------|------|--------|-------|
| 0.003 | 0.08 | 0.043 | 1.09 | 0.071 | 1.80 | 0.321 | 8.15 |
| 0.007 | 0.18 | 0.046 | 1.17 | 0.073 | 1.85 | 0.325 | 8.26 |
| 0.025 | 0.64 | 0.049 | 1.24 | 0.082 | 2.08 | 0.549 | 13.94 |
| 0.029 | 0.74 | 0.055 | 1.40 | 0.085 | 2.16 | | |
| 0.033 | 0.84 | 0.065 | 1.65 | 0.150 | 3.81 | | |
| 0.039 | 0.99 | 0.068 | 1.73 | 0.185 | 4.70 | | |
| 0.040 | 1.02 | 0.069 | 1.75 | 0.189 | 4.80 | | |
| 0.041 | 1.04 | 0.070 | 1.78 | 0.194 | 4.93 | | |

FIGURE 1 - DIMENSIONS AND CONFIGURATION

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS39029/64A>

THIRD ANGLE PROJECTION

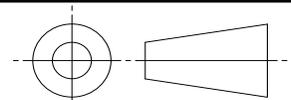

CUSTODIAN: AE-8C1

PROCUREMENT SPECIFICATION: AS39029

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) CONTACTS, ELECTRICAL CONNECTOR,
PIN, CRIMP REMOVABLE
(FOR MIL-DTL-24308 CONNECTORS)

SAE AS39029/64
SHEET 1 OF 4

REV. A

Copyright 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

ISSUED 2000-07 REAFFIRMED 2006-10 REVISED 2012-02

TABLE 1 – DESIGN CHARACTERISTICS

| BIN CODE | COLOR BANDS | | | MATING END SIZE | WIRE BARREL SIZE | TYPE | CLASS |
|-------------------|-----------------|-----------------|-----------------|-----------------------|------------------------|------|-------|
| | 1 ST | 2 ND | 3 RD | | | | |
| 369 | ORANGE | BLUE | WHITE | 20 | 20 | A | A |
| 657 ^{1/} | BLUE | GREEN | VIOLET | 20 | 20 | A | A |

^{1/} FINISH SHALL BE GOLD PLATING IN ACCORDANCE WITH ASTM B 488, TYPE II, CODE C, CLASS 1.27 OVER A SUITABLE UNDERPLATE. SILVER AND NICKEL SHALL NOT BE USED AS AN UNDERPLATE ON CLASSES M & N. THIS FINISH IS INTENDED FOR USE WITH MIL-DTL-24308 NON-MAGNETIC CONNECTORS, CLASS M AND N ONLY.

TABLE 2 – TOOLS

| BIN CODE | BASIC CRIMPING | POSITIONER | INSTALLING AND REMOVAL TOOLS |
|----------|----------------|-------------|---------------------------------|
| 369, 657 | M22520/2-01 | M22520/2-08 | M81969/39-01 M81969/1-02 |

TABLE 3 – PART NUMBER

| BIN CODE | AS39029 PART NUMBER | SUPERSEDED PART NUMBER |
|----------|---------------------|---------------------------|
| 369 | M39029/64-369 | M24308/10-1 |
| 657 | M39029/64-657 | ----- |

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF AS39029.

1. DESIGN:

CONTACTS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1 AND TABLE 1. DIMENSIONS ARE IN INCHES. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY. DIMENSIONS SHOWN APPLY AFTER PLATING. MACHINED SURFACES TO HAVE 63 (RA) OR BETTER PER USASI B46.1 UNLESS OTHERWISE SPECIFIED. REMOVE ALL BURRS AND SHARP EDGES .003 (0.08 MM) MAXIMUM UNLESS OTHERWISE SPECIFIED. ALL DIAMETERS TO BE CONCENTRIC WITH EACH OTHER WITHIN .004 (0.10 MM) TIR.

2. TOOLS:

TOOLS REQUIRED FOR CRIMPING CONTACTS TO THE WIRE/CABLE AND THE INSTALLING/REMOVAL FROM THE CONNECTOR SHALL BE IN ACCORDANCE WITH TABLE 2.

3. PART NUMBERS:

CONTACT PART NUMBERS SHALL BE IN ACCORDANCE WITH TABLE 3. SUPERSEDED PART NUMBERS ARE AS SPECIFIED.

4. MATERIALS:

MATERIALS SHALL BE IN ACCORDANCE WITH SAE AS39029.

OUTGASSING REQUIREMENT:

PART NUMBER M39029/64-657 SHALL MEET THE OUTGASSING REQUIREMENTS OF ASTM-E595. THE REQUIREMENT MAY BE VERIFIED BY CERTIFICATION. CONTACT THE QUALIFYING ACTIVITY FOR DETAILS CONCERNING THE CERTIFICATION PROCESS.

RESIDUAL MAGNETISM REQUIREMENT:

PART NUMBER M39029/64-657 SHALL ALSO MEET THE RESIDUAL MAGNETISM. WHEN TESTED WITH THE APPLICABLE MIL-DTL-24308 CONNECTOR, THE RESIDUAL MAGNETISM SHALL NOT EXCEED 200 GAMMA. THE FOLLOWING DETAILS SHALL APPLY:

ACCEPTABLE TEST METHOD.

CONNECTOR SHALL BE FULLY ASSEMBLED BEFORE TESTING. THE RESIDUAL MAGNETISM TEST SHALL BE PERFORMED IN A MAGNETICALLY QUIET AREA, I.E., WHERE MACHINES, ELECTRONIC EQUIPMENT, VEHICLES, AND PERSONNEL TRAFFIC ARE RESTRICTED. REFER TO THE TEST ARRANGEMENT OF FIGURE 2 BELOW AND PROCEED AS FOLLOWS:

- A. WARM UP THE MILLIAMMETER OR FLUX METER FOR A MINIMUM OF FIFTEEN MINUTES
- B. MOUNT THE MAGNETOMETER PROBE IN A NON-MAGNETIC STAND IN A HORIZONTAL POSITION AT FULL CABLE LENGTH FROM THE MILLIAMMETER.
- C. WITH THE METER PRESET TO THE APPROPRIATE SCALE, ALIGN THE PROBE IN A MAGNETIC E-W DIRECTION OR ORIENT TO OBTAIN A ZERO READING ON THE METER.
- D. PASS THE CONNECTOR SPECIMEN THREE TIMES BETWEEN THE POLES OF A MAGNET WITH A FIELD STRENGTH OF 5000 GAUSS \pm 5%. THE CONNECTOR SHALL NOT CONTACT THE POLE PIECES.
- E. IMMEDIATELY PLACE THE CONNECTOR TO WITHIN ONE-EIGHT (1/8) INCH OF THE PROBE TIP AND ORIENT THE SPECIMEN FOR A MAXIMUM MAGNETISM READING. THE MEASUREMENT UNIT SHALL BE IN GAMMA, WHERE ONE GAMMA IS EQUIVALENT TO 1×10^{-5} GAUSS.

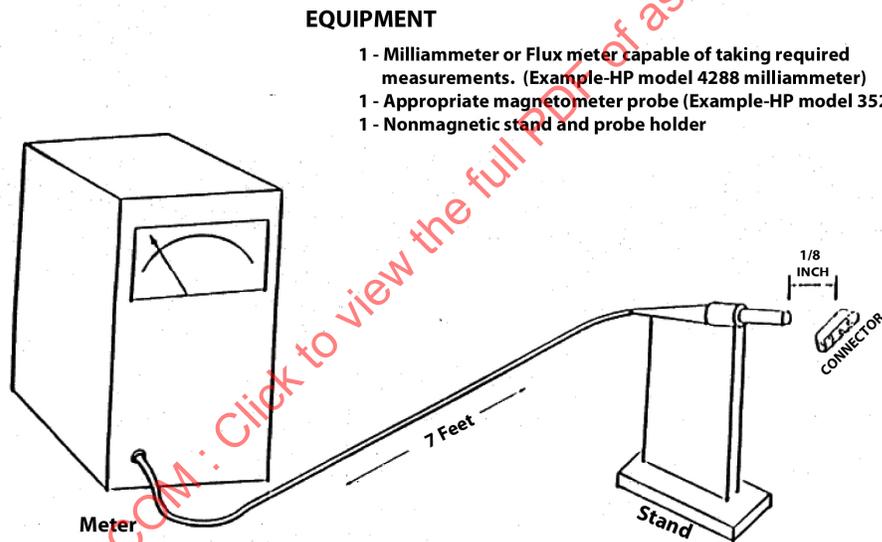


FIGURE 2 – RESIDUAL MAGNETISM TEST ARRANGEMENT

AN ALTERNATIVE RESIDUAL MAGNETISM TEST METHOD MAY BE USED WITH APPROVAL FROM THE QUALIFYING ACTIVITY.

5. MECHANICAL:

MECHANICAL PROPERTIES SHALL BE IN ACCORDANCE WITH SAE AS39029.

6. ELECTRICAL:

ELECTRICAL PROPERTIES SHALL BE IN ACCORDANCE WITH SAE AS39029.

| | | | |
|---|---|---------------------------------------|-------------------------|
|  An SAE International Group | AEROSPACE STANDARD | SAE AS39029/64 SHEET 3 OF 4 | REV. A |
| | (R) CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE (FOR MIL-DTL-24308 CONNECTORS) | | |