

REV. D

AS39029/76™

FEDERAL SUPPLY CLASS
5999

RATIONALE

LIMITED SCOPE REVISION NEEDED TO ADD NEW CRIMP TOOLS AND DO MINOR EDITING AS NEEDED.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.

THIS DETAIL SPECIFICATION SPECIFIES LOWER PERFORMANCE REQUIREMENTS THAN THE APPLICABLE MIL-DTL-38999 SERIES I, III, AND IV CONNECTORS (SEE APPLICATION NOTES).



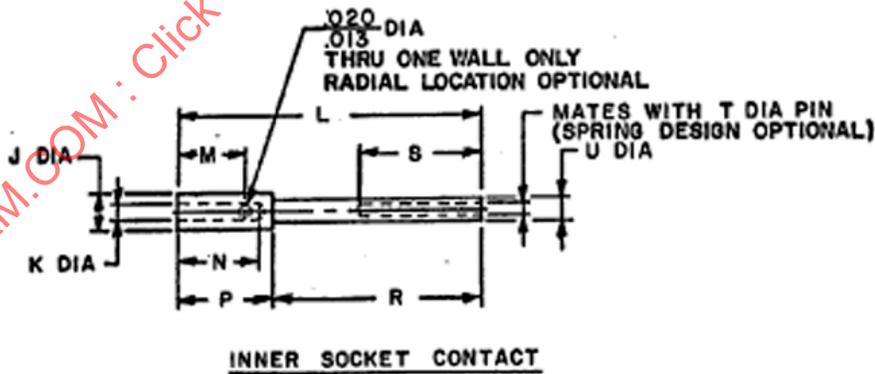


FIGURE 1 - PIN CONTACTS

For more information on this standard, visit
<https://www.sae.org/standards/content/AS39029/76D>

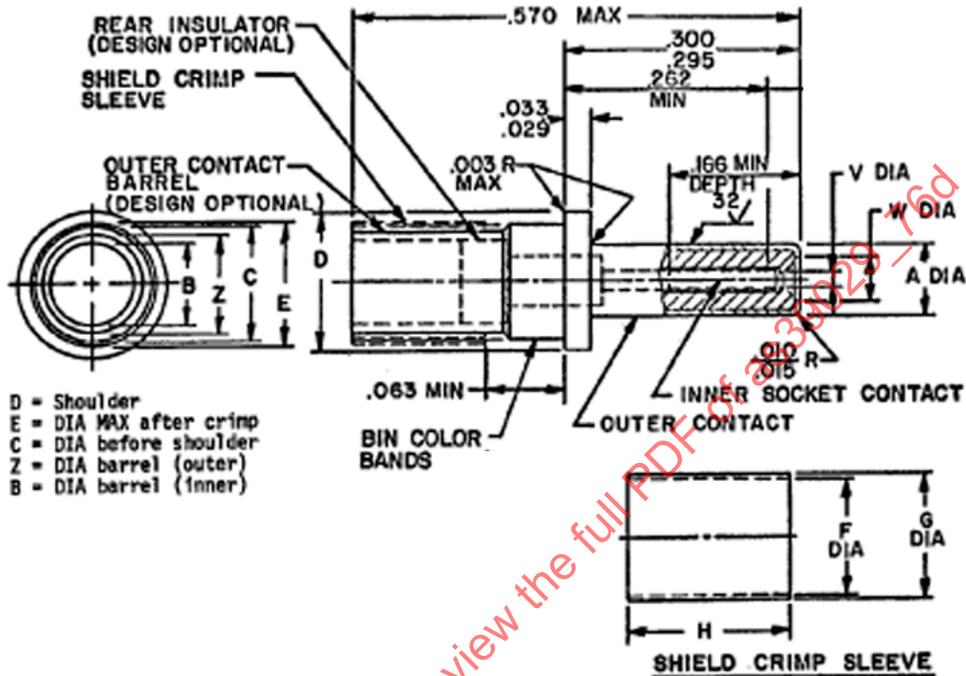

CUSTODIAN: AE-8C1

PROCUREMENT SPECIFICATION: AS39029



AEROSPACE STANDARD

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP
REMOVABLE, SHIELDED, SIZE 16 (FOR MIL-DTL-38999
SERIES I, II, III, IV CONNECTORS AND 50 OHM CABLE)

AS39029/76™
SHEET 1 OF 7

REV. D

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 2000-07 REAFFIRMED 2018-08 REVISED 2024-01

TABLE 1A - CONTACT DIMENSIONS

BIN CODE	A DIA	B DIA MIN	C DIA	D DIA	E DIA MAX	F DIA MIN	G DIA MAX	H	J DIA MAX	K DIA MIN	L REF
424	.0635 (1.61)	.0670 (1.70)	.103 (2.62)	.130 (3.30)	.108 (2.74)	.105 (2.67)	.120 (3.05)	.105 (2.67)	.046 (1.17)	.0210 (0.53)	.392 (9.96)
425		.0575 (1.46)				.094 (2.39)			.046 (1.17)	.0210 (0.53)	
426		.0615 (1.56)				.105 (2.67)			.052 (1.32)	.0355 (.90)	
427		.0575 (1.46)				.094 (2.39)			.046 (1.17)	.0270 (0.69)	

TABLE 1B - CONTACT DIMENSIONS (CONTINUED)

BIN CODE	M	N MIN	P	R	S MIN	T	U	V DIA	W DIA	Z DIA MAX								
424	.094 (2.39)	.103 (2.62)	.125 (3.18)	.271 (6.88)	.156 (3.96)	.0155 (0.39)	.030 (0.76)	.022 (0.56)	.041 (1.04)	.085 (2.16)								
425										.087 (2.21)	.119 (3.02)	.269 (6.83)	.0145 (0.37)	.028 (0.71)	.018 (0.46)	.038 (0.97)	.076 (1.93)	
426																		.085 (2.16)
427																		.076 (1.93)

TABLE 2 - MARKING AND DESIGN CHARACTERISTICS

BIN CODE	COLOR BANDS			KNOWN CABLE ACCOMMODATED (SEE APPLICATION NOTES)	CONTACT CAVITY SIZE	TYPE	CLASS
	1 ST	2 ND	3 RD				
424	YELLOW	RED	YELLOW	M17/119-RG174 3/ M17/113-RG316 M17/094-RG179	16	D	B
425	YELLOW	RED	GREEN	M17/093-RG178			
426 1/	YELLOW	RED	BLUE	2/			
427 1/	YELLOW	RED	VIOLET	2/			

1/ CONTACT NOT RECOMMENDED FOR USE.

2/ NO KNOWN STANDARD CABLE EXISTS TO REPLACE THE PREVIOUSLY RECOMMENDED COMMERCIAL CABLES OR THE CABLES ARE NO LONGER MANUFACTURED. STANDARD TOOLS MAY NOT APPLY. FOLLOW CONTACT SUPPLIER'S INSTRUCTIONS.

3/ CABLE IS NOT RECOMMENDED FOR NEW DESIGN.

TABLE 3 - TOOLS

BIN CODE	INNER CONTACT (SEE TABLE 3A)		OUTER CONTACT		INSTALLING TOOL	REMOVAL TOOL
	BASIC CRIMPING TOOL	POSITIONER	BASIC CRIMPING TOOL	POSITIONER		
424, 425, 426, 427	M22520/2-01	M22520/2-35	M22520/4-01	M22520/4-02	M81969/8-07 OR M81969/8-307 OR M81969/14-03	M81969/8-08 OR M81969/8-308 OR M81969/14-03

TABLE 3A - INNER CONTACT TOOL SELECTOR SETTING

BIN CODE	KNOWN CABLE ACCOMMODATED	INNER CONTACT TOOL SELECTOR SETTING NO.
424	M17/119-RG174 <u>3/</u>	3
	M17/113-RG316	5
	M17/094-RG179	3
425	M17/093-RG178	3
426 <u>1/</u>	<u>2/</u>	<u>2/</u>
427 <u>1/</u>	<u>2/</u>	<u>2/</u>

1/ CONTACT NOT RECOMMENDED FOR USE.

2/ NO KNOWN STANDARD CABLE EXISTS TO REPLACE THE PREVIOUSLY RECOMMENDED COMMERCIAL CABLES OR THE CABLES ARE NO LONGER MANUFACTURED. STANDARD TOOLS MAY NOT APPLY. FOLLOW CONTACT SUPPLIER'S INSTRUCTIONS.

3/ CABLE IS NOT RECOMMENDED FOR NEW DESIGN.

TABLE 4 - INNER CONTACT ENGAGEMENT AND SEPARATION FORCES

TEST PIN DIAMETER (INCHES)	MINIMUM SEPARATION FORCE (OUNCES)		MAXIMUM ENGAGEMENT FORCE (OUNCES)		MAXIMUM AVERAGE ENGAGEMENT FORCE (OUNCES)	
	INITIAL	AFTER CONDITIONING	INITIAL	AFTER CONDITIONING	INITIAL	AFTER CONDITIONING
.0155 (0.39) +.0002 (0.01) -.0000 (0.00)	N/A	N/A	12	14	N/A	N/A
.0145 (0.37) +.0000 (0.00) -.0002 (0.01)	.5	.4	N/A	N/A	N/A	N/A

TABLE 5 - CONTACT RESISTANCE

BIN CODE	CABLE ACCOMMODATED	MAXIMUM VOLTAGE DROP (MILLIVOLTS)					
		25° +3°, -0 °C		25° +3°, -0 °C <u>2/</u>		200° +3°, -0 °C	
		INNER	OUTER	INNER	OUTER	INNER	OUTER
424	M17/119-RG174 <u>3/</u>	55	85	66	102	94 <u>3/</u>	145 <u>3/</u>
	M17/113-RG316	55	75	66	90	94	128
	M17/094-RG179	120	70	144	84	204	119
425	M17/093-RG178	120	110	144	132	204	187
426 <u>1/</u>	<u>2/</u>						
427 <u>1/</u>	<u>2/</u>						

1/ CONTACT NOT RECOMMENDED FOR USE.

2/ NO KNOWN STANDARD CABLE EXISTS TO REPLACE THE PREVIOUSLY RECOMMENDED COMMERCIAL CABLES OR THE CABLES ARE NO LONGER MANUFACTURED. STANDARD TOOLS MAY NOT APPLY. FOLLOW CONTACT SUPPLIER'S INSTRUCTIONS.

3/ THE MAXIMUM OPERATING TEMPERATURE OF THE RG174 PVC CABLE IS 85° +3, -0 °C. CABLE IS NOT RECOMMENDED FOR NEW DESIGN.

TABLE 6 - LOW SIGNAL LEVEL CONTACT RESISTANCE (INNER CONTACT ONLY) AND TENSILE STRENGTH

BIN CODE	CABLE ACCOMMODATED	MAXIMUM CONTACT RESISTANCE (MILLIOHMS)		TENSILE LOAD (POUNDS MINIMUM)	
		INITIAL	AFTER CONDITIONING	INNER CONTACT	OUTER CONTACT
424	M17/119-RG174 3/	55	66	15.0	15.0
	M17/113-RG316	55	66	10.0	15.0
	M17/094-RG179	120	144	3.5	15.0
425	M17/093-RG178	120	144	3.5	10.0
426 1/	2/				
427 1/	2/				

1/ CONTACT NOT RECOMMENDED FOR USE.

2/ NO KNOWN STANDARD CABLE EXISTS TO REPLACE THE PREVIOUSLY RECOMMENDED COMMERCIAL CABLES OR THE CABLES ARE NO LONGER MANUFACTURED. STANDARD TOOLS MAY NOT APPLY. FOLLOW CONTACT SUPPLIER'S INSTRUCTIONS.

3/ CABLE IS NOT RECOMMENDED FOR NEW DESIGN.

TABLE 7 - PART NUMBER AND BIN CODE

PART NUMBER	BIN CODE	SUPERSEDED
M39029/76-424	424	M39029/76-16A
M39029/76-425	425	M39029/76-16B
M39029/76-426	426	M39029/76-16C
M39029/76-427	427	M39029/76-16D

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.

1. DESIGN:

- a. CONTACTS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1, TABLES 1 AND 2.
- b. DIMENSIONS ARE IN INCHES. METRIC EQUIVALENTS IN PARENTHESES ARE FOR GENERAL INFORMATION ONLY. DIMENSIONS APPLY AFTER PLATING.
- c. THE .262 MIN DIMENSION IS THE POINT AT WHICH A SQUARE ENDED PIN OF THE SAME BASIC DIAMETER AS THE MATING CONTACT FIRST ENGAGES THE INNER CONTACT SPRING. PROVISION FOR CLEARANCE HOLE SHALL BE PROVIDED.
- d. THE MAXIMUM DIAMETER OVER THE CRIMPED PORTION OF THE SHIELD CRIMP SLEEVE (CRIMP DEFORMATION). SHALL NOT EXCEED E DIAMETER.
- e. CONTACTS ARE DESIGNED FOR 50 OHM IMPEDANCE MATCHING CABLES (SEE APPLICATION NOTE). FOR COMMERCIAL CABLE, ELECTRICAL AND MECHANICAL PROPERTIES OF THE CONTACT IS A FUNCTION OF THE CABLE SPECIFIED BY THE DESIGNER (SEE QUALIFICATION REQUIREMENTS).

2. TOOLS:

TOOLS REQUIRED FOR CRIMPING CONTACTS TO THE WIRE/CABLE AND THE INSTALLING/REMOVAL FROM THE CONNECTOR SHALL BE IN ACCORDANCE WITH TABLE 3.

3. PART NUMBERS:

CONTACT PART NUMBERS SHALL BE IN ACCORDANCE WITH TABLE 7. SUPERSEDED PART NUMBERS ARE AS SPECIFIED.

4. MATERIALS:

MATERIALS SHALL BE IN ACCORDANCE WITH AS39029.

	AEROSPACE STANDARD	AS39029/76™ SHEET 4 OF 7	REV. D
	CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SHIELDED, SIZE 16 (FOR MIL-DTL-38999 SERIES I, II, III, IV CONNECTORS AND 50 OHM CABLE)		

5. MECHANICAL:

- a. MECHANICAL PROPERTIES SHALL BE IN ACCORDANCE WITH AS39029.
- b. CONTACT ENGAGEMENT AND SEPARATION FORCES APPLY TO THE INNER SOCKET CONTACT ONLY. THE ENGAGEMENT DEPTH IS DETERMINED BY MIL-DTL-38999. THE TEST PINS SHALL BE IN ACCORDANCE WITH AS31971 EXCEPT THE DIAMETERS SHALL BE AS SPECIFIED IN TABLE 4. THE GAGE SURFACE ROUGHNESS SHALL NOT EXCEED 3 MICROINCHES. PROVISION FOR CLEARANCE HOLE SHALL BE PROVIDED.
- c. TENSILE STRENGTH (INNER AND OUTER CONTACT CRIMP JOINTS) FOR STANDARD CABLES SHALL BE IN ACCORDANCE WITH TABLE 6. TENSILE STRENGTH FOR COMMERCIAL CABLES IS A FUNCTION OF THE APPLICABLE CABLE (SEE QUALIFICATION REQUIREMENT).

6. ELECTRICAL:

- a. ELECTRICAL PROPERTIES SHALL BE IN ACCORDANCE WITH AS39029.
- b. LOW SIGNAL LEVEL CONTACT RESISTANCE APPLIES TO THE INNER CONTACT ONLY.
- c. CONTACT RESISTANCE TEST CURRENT FOR THE INNER CONTACT SHALL BE 1 AMPERE AND OUTER CONTACT SHALL BE 12 AMPERES.
- d. THE DIELECTRIC WITHSTANDING TEST VOLTAGE (APPLIED BETWEEN INNER AND OUTER CONTACTS) AT SEA LEVEL SHALL BE 800 VAC RMS AND AT 50000 FEET 250 VAC RMS.

7. ENVIRONMENTAL:

- a. ENVIRONMENTAL PROPERTIES SHALL BE IN ACCORDANCE WITH AS39029.
- b. CONTACTS MOUNTED IN CONNECTOR FIXTURES SHALL BE RANDOM VIBRATED IN ACCORDANCE WITH EIA-364-28. THE FOLLOWING DETAILS SHALL APPLY:
 - (1) TEST CONDITION V USING THE VIBRATION ENVELOPE SHOWN IN FIGURE 2.
 - (2) VIBRATION TO BE CONDUCTED AT STANDARD TEST CONDITIONS.
 - (3) DURATION SHALL BE 8 HOURS IN THE LONGITUDINAL DIRECTION AND 8 HOURS IN A PERPENDICULAR DIRECTION FOR A TOTAL OF 16 HOURS.
- c. FOR HIGH IMPACT SHOCK THE CONNECTOR FIXTURES SHALL BE COUPLED TOGETHER BY NORMAL COUPLING MEANS. ALL CONNECTORS SHALL BE WIRED IN A SERIES CIRCUIT WITH 100 MILLIAMPERES MAXIMUM CURRENT FLOW THROUGH THE SERIES CIRCUIT DURING THE TEST. CONNECTORS SHALL BE MONITORED FOR ANY DISCONTINUITIES. A DETECTOR CAPABLE OF DETECTING ALL DISCONTINUITIES IN EXCESS OF 1 MICROSECOND SHALL BE USED. WIRED AND MATED CONNECTORS SHALL BE SUBJECTED TO THE TEST SPECIFIED IN MIL-S-901, GRADE A WITH THE FOLLOWING MODIFICATIONS AND ADDITIONS.
 - (1) MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH MIL-S-901, LIGHT WEIGHT.
 - (2) THE CABLE OR WIRE BUNDLE SHALL BE SUPPORTED ON A STATIONARY FRAME IN SUCH A MANNER TO PROVIDE A FREE FLEXING CABLE LENGTH BETWEEN FRAME AND FIXTURE OF NOT LESS THAN 36 INCHES (914.4 MM).
 - (3) TEST CONDITION A.
 - (4) THE PLUG SHALL BE TERMINATED WITH AT LEAST 80% OF WIRED CONTACTS. THE WIRE BUNDLE SHALL BE PROVIDED WITH STRAIGHT, OPEN FRAME, STRAIN RELIEF ACCESSORY HARDWARE.

	AEROSPACE STANDARD	AS39029/76™ SHEET 5 OF 7	REV. D
	CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, SHIELDED, SIZE 16 (FOR MIL-DTL-38999 SERIES I, II, III, IV CONNECTORS AND 50 OHM CABLE)		