

RATIONALE

LIMITED SCOPE REVISION IS REQUIRED TO CORRECT THE DOCUMENT FEDERAL SUPPLY CLASS (FSC) NUMBER; IT SHOULD BE 5999 RATHER THAN 5935.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS39029.

REV.  
B

AS39029™/83

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


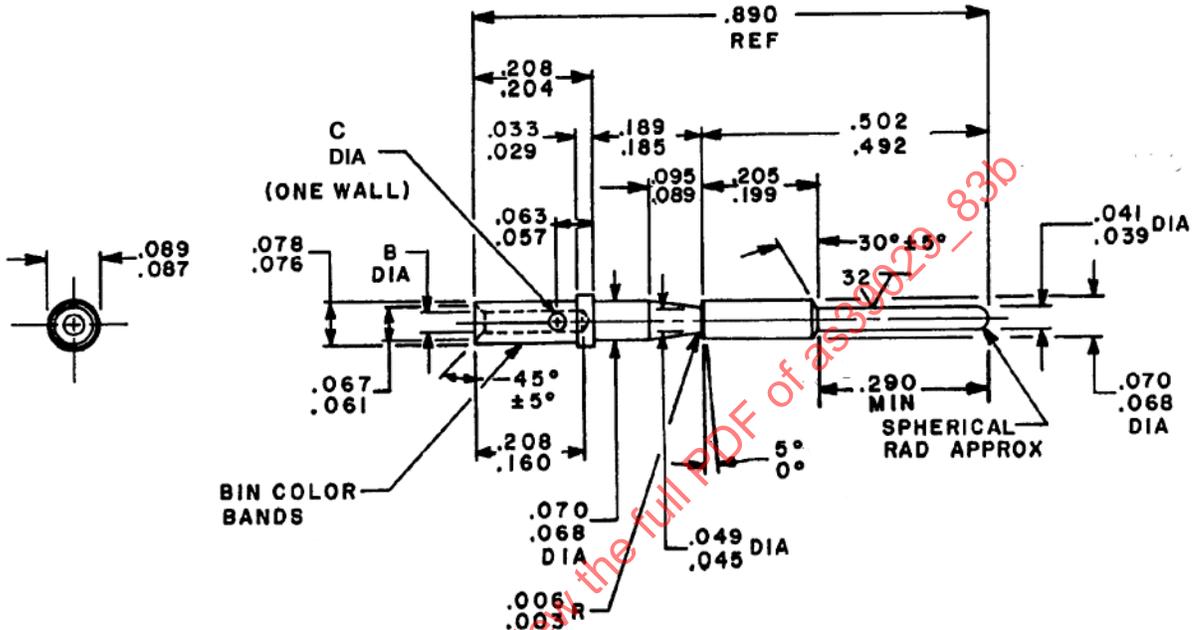


FIGURE 1 - DIMENSIONS AND CONFIGURATION

SAENORM.COM : Click to view the full PDF of AS39029-830

For more information on this standard, visit  
<https://www.sae.org/standards/content/AS39029/83B>

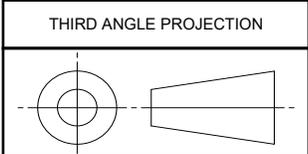

CUSTODIAN: AE-8C1

PROCUREMENT SPECIFICATION: AS39029



**AEROSPACE STANDARD**

CONTACTS, ELECTRICAL CONNECTOR,  
PIN, CRIMP REMOVABLE  
(FOR MIL-DTL-28840 CONNECTORS)

**AS39029™/83**  
SHEET 1 OF 4

**REV.  
B**

**TABLE 1 - DESIGN CHARACTERISTICS**

BIN CODE	B DIA	COLOR BANDS			MATING END SIZE	WIRE BARREL SIZE	TYPE	CLASS	C DIA 1/
		1ST	2ND	3RD					
508	.050 (1.27) .048 (1.22)	GREEN	BLACK	GRAY	20	20	A	B	.032 (.813) .026 (.660)
450	.0355 (.902) .0335 (.851)	YELLOW	GREEN	BLACK	20	22	A	B	.032 (.813) .026 (.660)
451	.0200 (.508) .0180 (.457)	YELLOW	GREEN	BROWN	20	28	A	B	.022 (.559) .018 (.457)

1/ HOLE - ONE WALL.

**TABLE 2 - TOOLS**

BIN CODE	BASIC CRIMPING TOOL	POSITIONER	INSTALLING TOOL	REMOVAL TOOL
508	M22520/34-01	M22520/34-02	M81969/33-01	M81969/34-01
450	M22520/34-01	M22520/34-02	M81969/33-01	M81969/34-01
451	M22520/34-01	M22520/34-02	M81969/33-01	M81969/34-01

**TABLE 3 - PART NUMBER AND BIN CODE**

PART NUMBER	BIN CODE	SUPERSEDED PART NUMBER
M39029/83-508	508	-----
M39029/83-450	450	M39029/83-20-22
M39029/83-451	451	M39029/83-20-28

**TABLE 4 - LOW SIGNAL LEVEL CONTACT RESISTANCE (TYPE A)**

MATING END SIZE	WIRE BARREL SIZE	WIRE SIZE	MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	
			INITIAL	AFTER CONDITIONING
20	20	20	9	11
		24	20	23
20	22	22	15	17
		26	31	38
20	28	28	50	60
		30	75	88

**TABLE 5 - CONTACT RESISTANCE (TYPE A) WITH SILVER PLATED WIRE**

MATING END SIZE	WIRE BARREL SIZE	WIRE SIZE RANGE	TEST CURRENT (AMPERES)	MAXIMUM VOLTAGE DROP (MILIVOLTS)					
				25 °C ±3 °C		25 °C ±3 °C AFTER CONDITIONING		200 °C +3 °C -0 °C	
				MAX	MAX AVG	MAX	MAX AVG	MAX	MAX AVG
20	20	20	7.5	55	50	66	56	94	71
		24	3	45	41	54	46	77	63
20	22	22	5.0	73	66	88	75	125	94
		26	2.0	53	48	64	55	91	69
20	28	28	1.5	54	49	65	56	92	69
		30	1.0	60	55	73	62	103	78

**TABLE 6 - TENSILE STRENGTH (TYPE A)**

MATING END SIZE	WIRE BARREL SIZE	WIRE SIZE	AXIAL LOAD (POUNDS)				
			SILVER TIN-PLATED COPPER WIRES		NICKEL-PLATED COPPER WIRE		HIGH STRENGTH COPPER ALLOY WIRE
			INITIAL CONDITION VALUES	THERMAL CONDITION VALUES	INITIAL CONDITION VALUES	THERMAL CONDITION VALUES	INITIAL CONDITION VALUES
20	20	20	20	14	19	14.3	-----
		24	8	6	6	4.5	
20	22	22	12	7.5	8	6.0	22
		26	5	4.0	3	2.5	
20	28	28	3	2.25	2	1.50	5.5
		30	1.5	1.13	1.5	1.13	

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF AS39029.

1. DESIGN:

CONTACTS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1 AND TABLE 1. DIMENSIONS ARE IN INCHES. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY. DIMENSIONS SHOWN APPLY AFTER PLATING. SPHERICAL END DIMENSIONS TO COMPLY WITH AS39029. SURFACE FINISH (ELECTRICAL ENGAGEMENT AREA) 32 MICROINCH FINISH. PIN TIP FLAT AS DEFINED IN AS39029 DOES NOT REQUIRE 32 MICROINCH FINISH. THE .290 MIN DIMENSION IS THE CONTACT ENGAGEMENT AREA FOR THE LOCALIZED FINISH OPTION (SEE REQUIREMENTS).

2. TOOLS:

TOOLS REQUIRED FOR CRIMPING CONTACTS TO WIRE/CABLE AND THE INSTALLING/REMOVAL FROM THE CONNECTOR SHALL BE IN ACCORDANCE WITH TABLE 2.

3. PART NUMBERS:

CONTACT PART NUMBERS SHALL BE IN ACCORDANCE WITH TABLE 3. SUPERSEDED PART NUMBERS ARE AS SPECIFIED.

4. MATERIALS:

MATERIALS AND PLATING SHALL BE IN ACCORDANCE WITH AS39029. LOCALIZED FINISH OPTION: APPLICABLE CONTACTS SHALL BE FURNISHED AS SPECIFIED IN THE LOCALIZED FINISH REQUIREMENTS OF AS39029. THE AS39029 E DIMENSION OF THE Y AREA SHALL BE .290 INCH MINIMUM.

5. MECHANICAL:

	<b>AEROSPACE STANDARD</b>	<b>AS39029™/83</b> SHEET 3 OF 4	<b>REV.</b> <b>B</b>
	CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE (FOR MIL-DTL-28840 CONNECTORS)		