

AS4137

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


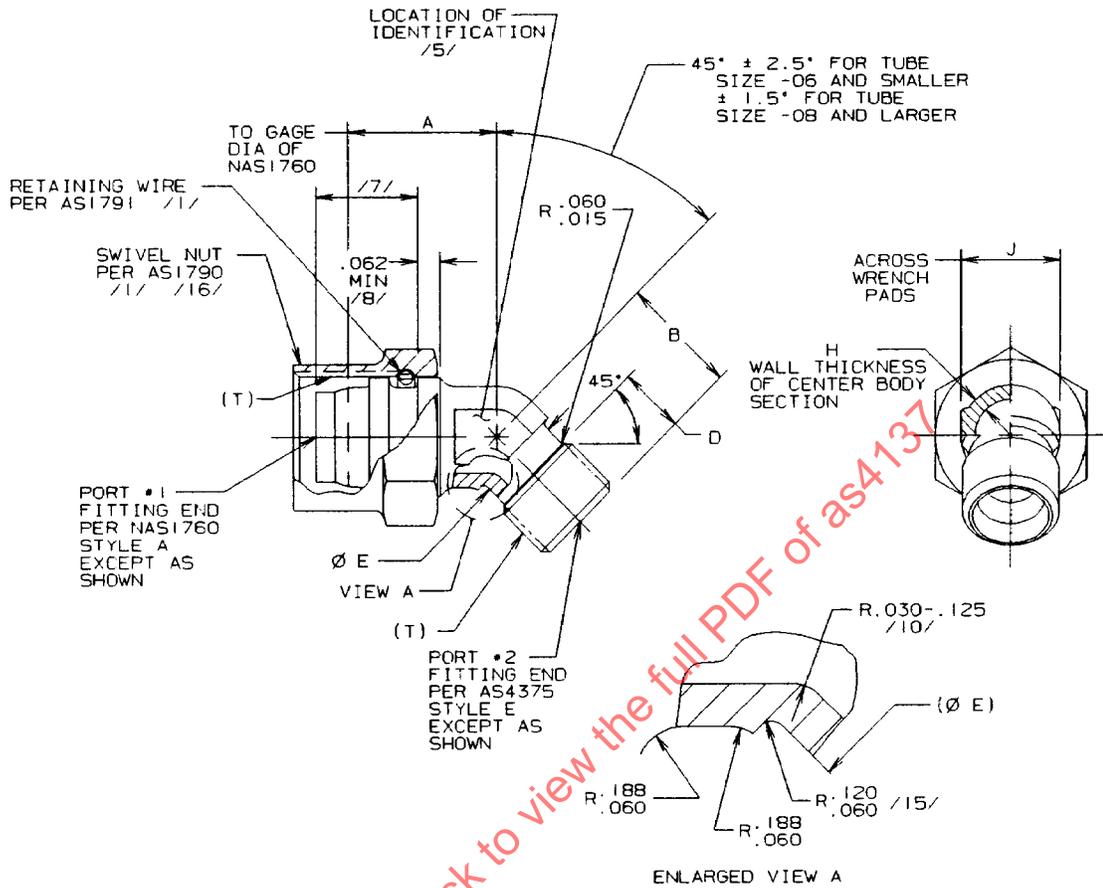


FIGURE 1 - ELBOW, 45°, SWIVEL, REDUCED BODY, FLARELESS

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-18280



AEROSPACE STANDARD

ELBOW, 45°, SWIVEL,
REDUCED BODY, FLARELESS

AS4137
SHEET 1 OF 5

ISSUED 1992-11 REAFFIRMED 2000-10

AS4137

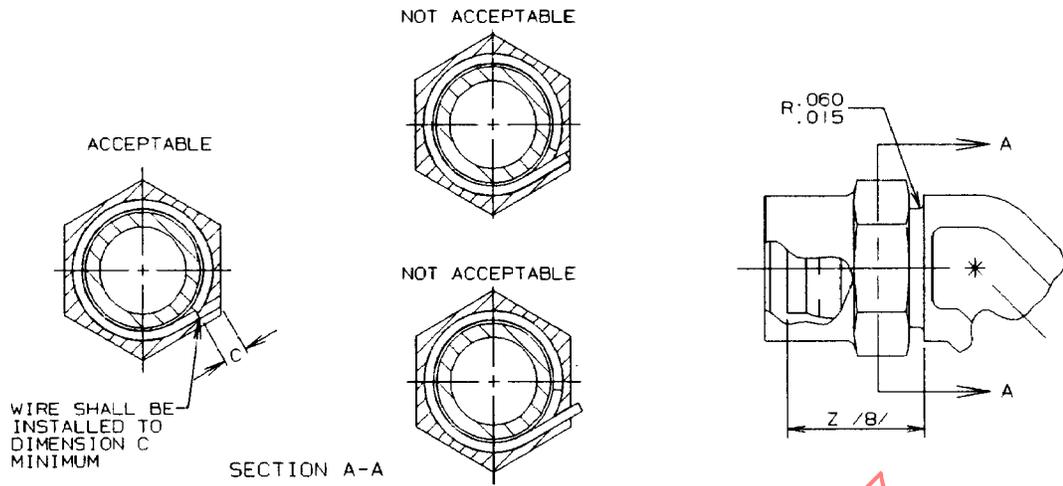


FIGURE 2 - INSTALLATION, SWIVEL NUT RETAINING WIRE

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS4137 /22/ SIZE CODE	H MIN	J	LB/EA MAX CRES	LB/EA MAX TI
04	.050	.390	.050	.028
05	.050	.453	.064	.036
06	.050	.453	.076	.043
08	.050	.577	.134	.075
10	.070	.702	.208	.117
12	.080	.890	.326	.183
16	.090	1.140	.492	.276
20	.110	1.390	.794	.446
24	.130	1.640	1.148	.645

AS4137

TABLE 2 - FITTING END

SIZE CODE	TUBE OD	T THREAD PER MIL-S-8879	C /16/	D	E	Z
04	.250	.4375-20UNJF	.045	.371	.350	.600
05	.313	.5000-20UNJF	.045	.371	.412	.660
06	.375	.5625-18UNJF	.055	.379	.453	.730
08	.500	.7500-16UNJF	.063	.461	.577	.845
10	.625	.8750-14UNJF	.063	.511	.702	.940
12	.750	1.0625-12UNJ	.095	.556	.890	.975
16	1.000	1.3125-12UNJ	.125	.556	1.140	1.160
20	1.250	1.6250-12UNJ	.155	.556	1.390	1.190
24	1.500	1.8750-12UNJ	.180	.556	1.640	---

TABLE 3 - LEG LENGTH A

FORGING SIZE	04	05	06	08	10	12	16	20	24
04	.581	---	---	---	---	---	---	---	---
05	.607	.659	---	---	---	---	---	---	---
06	.629	.681	.742	---	---	---	---	---	---
08	.658	.710	.771	.869	---	---	---	---	---
10	.715	.767	.828	.926	1.006	---	---	---	---
12	.723	.775	.836	.934	1.014	1.002	---	---	---
16	.788	.840	.901	.998	1.077	1.066	1.114	---	---
20	.853	.905	.966	1.063	1.142	1.131	1.179	1.262	---
24	.950	.957	1.018	1.115	1.194	1.183	1.231	1.314	1.491

TABLE 4 - LEG LENGTH B

FORGING SIZE	04	05	06	08	10	12	16	20	24
04	.703	---	---	---	---	---	---	---	---
05	.616	.719	---	---	---	---	---	---	---
06	.643	.659	.770	---	---	---	---	---	---
08	.681	.697	.697	.916	---	---	---	---	---
10	.707	.723	.723	.816	1.026	---	---	---	---
12	.746	.762	.762	.855	.918	1.148	---	---	---
16	.811	.811	.827	.920	.983	1.046	1.213	---	---
20	.876	.876	.892	.985	1.048	1.111	1.111	1.278	---
24	.928	.928	.944	1.037	1.100	1.163	1.163	1.163	1.330

AS4137

NOTES:

/1/ MATERIAL:

a. CODE LETTER J:

- (1) BODY: TYPE 304 CORROSION RESISTANT STEEL PER AMS 5639
- (2) NUT: CODE LETTER J OF AS1790 REFERENCE (TYPE 304 CORROSION RESISTANT STEEL)
- (3) WIRE: PER AS1791 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

b. CODE LETTER T:

- (1) BODY: TYPE 6AL4V TITANIUM ALLOY PER AMS 4928
- (2) NUT: CODE LETTER T OF AS1790 REFERENCE (TYPE 6AL4V TITANIUM ALLOY)
- (3) WIRE: PER AS1791 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

c. CODE LETTER V:

- (1) BODY: TYPE 15-5PH CORROSION RESISTANT STEEL PER AMS 5659
- (2) NUT: CODE LETTER V OF AS1790 REFERENCE (TYPE 15-5PH CORROSION RESISTANT STEEL)
- (3) WIRE: PER AS1791 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

2. HEAT TREATMENT:

a. MATERIAL CODE LETTER J:

- (1) BODY, NUT AND WIRE: NONE

b. MATERIAL CODE LETTER T:

- (1) BODY, NUT AND WIRE: NONE

c. MATERIAL CODE LETTER V:

- (1) BODY: HEAT TREAT TO CONDITION H-1075 PER AMS 2759/3
- (2) NUT: MATERIAL CODE LETTER V OF AS1790 REFERENCE (HEAT TREAT TO CONDITION H-1075)
- (3) WIRE: NONE

/3/ FINISH:

a. MATERIAL CODE LETTER J:

- (1) BODY: PASSIVATE PER QQ-P-35 TYPE VI OR TYPE VII AND COAT WITH DRY FILM LUBRICANT PER MIL-L-46010, TYPE I /7/
- (2) NUT: CODE LETTER J SUFFIX CODE N OF AS 1790 REFERENCE (PASSIVATE WITH DRY FILM LUBRICANT ON ID)
- (3) WIRE: PER AS1791 REFERENCE (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)

b. MATERIAL CODE LETTER T:

- (1) BODY: FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486 AND DRY FILM LUBRICANT PER MIL-L-46010 TYPE I /7/
- (2) NUT: CODE LETTER T WITH SUFFIX CODE N OF AS 1790 REFERENCE (FLUORIDE PHOSPHATE CONVERSION COAT AND DRY FILM LUBRICANT ON ID)
- (3) WIRE: PER AS1791 REFERENCE (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)

c. MATERIAL CODE LETTER V:

(1) BODY:

- (a) NO SUFFIX FINISH CODE LETTER: PASSIVATE PER QQ-P-35, TYPE II OR TYPE VIII AND DRY FILM LUBRICANT PER MIL-L-46010 TYPE I /7/
- (b) SUFFIX FINISH CODE LETTER P; CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2

(2) NUT:

- (a) NO SUFFIX FINISH CODE LETTER; CODE LETTER V AND SUFFIX CODE N OF AS1790 REFERENCE (PASSIVATE AND COAT WITH DRY FILM LUBRICANT ON ID)