

REV. C

SAE AS4383

FEDERAL SUPPLY CLASS
4730

RATIONALE

CORRECTION OF VALUES FOR DIMENSIONS K, L, M, N IN TABLE 1B.

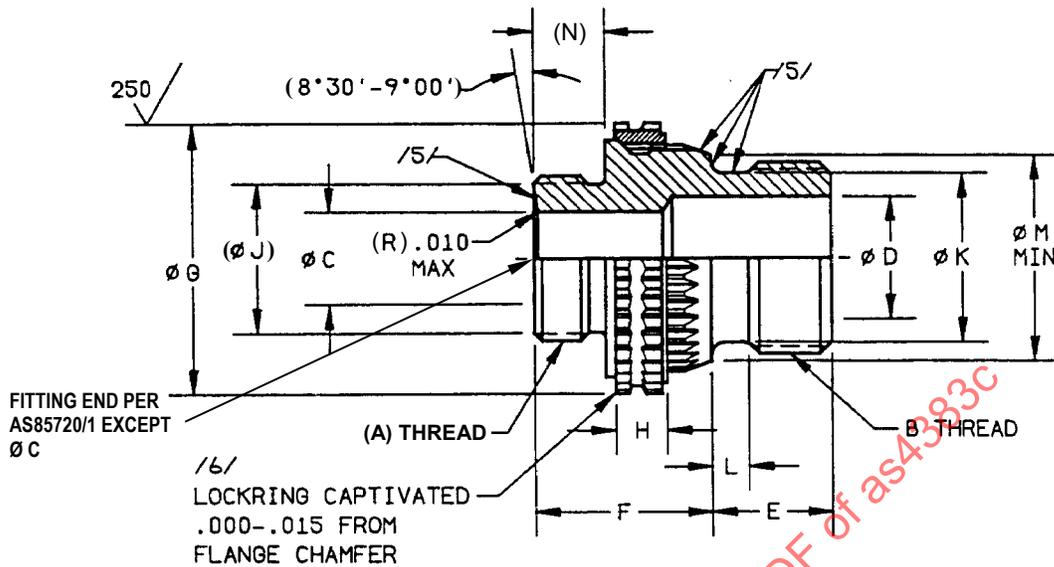



FIGURE 1 - ADAPTER, ASSEMBLY

TABLE 1A - DIMENSIONS A THROUGH H

BASIC NO. AS4383 /16/ SIZE CODE	A THREAD AS8879	B THREAD AS8879	C	D	E +.000 -.015	F +.010 -.005	G	H ±.007
05-04	.4375-24UNJS-3A	.3750-24UNJF-3A	.184-.190	.232	.381	.701	.624	.192
06-04	.4375-24UNJS-3A	.4375-20UNJF-3A	.184-.190	.295	.395	.733	.700	.210
08-04	.4375-24UNJS-3A	.5625-18UNJF-3A	.184-.190	.412	.430	.734	.814	.210
08-06	.5625-20UNJS-3A	.5625-18UNJF-3A	.294-.300	.412	.430	.754	.814	.210
10-04	.4375-24UNJS-3A	.6875-24UNJEF-3A	.184-.190	.498	.465	.758	1.040	.210
10-06	.5625-20UNJS-3A	.6875-24UNJEF-3A	.294-.300	.498	.465	.758	1.040	.210
10-08	.7188-20UNJS-3A	.6875-24UNJEF-3A	.398-.408	.498	.465	.771	1.040	.210
12-06	.5625-20UNJS-3A	.8125-20UNJEF-3A	.294-.300	.633	.527	.751	1.170	.220
12-08	.7188-20UNJS-3A	.8125-20UNJEF-3A	.398-.408	.633	.527	.764	1.170	.220
12-10	.8438-18UNJS-3A	.8125-20UNJEF-3A	.493-.503	.633	.527	.828	1.170	.220
16-10	.8438-18UNJS-3A	1.1250-18UNJEF-3A	.493-.503	.861	.564	.841	1.456	.220
16-12	1.0000-16UNJ-3A	1.1250-18UNJEF-3A	.604-.614	.861	.564	.881	1.456	.220
20-12	1.0000-16UNJ-3A	1.3125-18UNJEF-3A	.604-.614	1.057	.569	.888	1.782	.240
20-16	1.2500-14UNJS-3A	1.3125-18UNJEF-3A	.839-.851	1.057	.569	.936	1.782	.240
24-12	1.0000-16UNJ-3A	1.6250-18UNJEF-3A	.604-.614	1.297	.608	.909	2.031	.240
24-16	1.2500-14UNJS-3A	1.6250-18UNJEF-3A	.839-.851	1.297	.608	.957	2.031	.240

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS4383C>

THIRD ANGLE PROJECTION

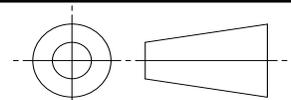

CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS85720

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING ASSEMBLY, REDUCER RING LOCKED PORT CONNECTION TO BEAM SEAL 5000 PSI /8/

SAE AS4383
SHEET 1 OF 3

REV. C

Copyright 2012 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

ISSUED 1992-06 REAFFIRMED 2004-07 REVISED 2012-05

TABLE 1B – DIMENSIONS J THROUGH N

BASIC NO. AS4383 /16/ SIZE CODE	(J)	K +.005 -.002	L +.010 -.005	M	(N) ±.015
05-04	.377-.383	.299	.125	.393	.275
06-04	.377-.383	.362	.125	.456	.275
08-04	.377-.383	.480	.125	.574	.275
08-06	.490-.497	.480	.125	.574	.295
10-04	.377-.383	.623	.125	.717	.275
10-06	.490-.497	.623	.125	.717	.295
10-08	.646-.654	.623	.125	.717	.308
12-06	.490-.497	.735	.157	.891	.295
12-08	.646-.654	.735	.157	.891	.308
12-10	.763-.772	.735	.157	.891	.372
16-10	.763-.772	.998	.157	1.154	.372
16-12	.910-.919	.998	.157	1.154	.412
20-12	.910-.919	1.223	.157	1.379	.412
20-16	1.148-1.158	1.223	.157	1.379	.460
24-12	.910-.919	1.500	.157	1.656	.412
24-16	1.148-1.158	1.500	.157	1.656	.460

NOTES

1. MATERIAL

- a. FITTING: 6AL-4V TITANIUM ALLOY PER AMS4928, AMS4965, OR AMS4967
- b. LOCKRING: A286 CORROSION RESISTANT STEEL PER AMS5731, AMS5732, AMS5734, AMS5737, OR AMS5853.

2. HEAT TREATMENT

- a. FITTING: 130 ksi UTS MIN
- b. LOCKRING: 34 TO 40 HRC

3. FINISH

- a. FITTING: ANODIC TREATMENT PER AMS2488, TYPE 2.
- b. LOCKRING: PASSIVATE PER AMS2700 TYPE 2.

/4/ PROCUREMENT SPECIFICATION: AS85720 EXCEPT AS SPECIFIED ON THIS STANDARD. THIS PART SHALL BE QUALIFIED TO THE PROCUREMENT SPECIFICATION IN A COMPLETE ASSEMBLY. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.

/5/ SEALING SURFACE: NO VISIBLE DEFECTS. TO BE PROTECTED FOR SHIPMENT.

/6/ LOCKRING RETAINED ON FITTING BY CONTROLLED INTERFERENCE FIT.

7. IDENTIFICATION PER AS478 METHOD 35D, MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE, AND PART NUMBER.

/8/ WORKING PRESSURE: THIS PART IS DESIGNED FOR USE IN 5000 psi (20 000 psi BURST PRESSURE) HYDRAULIC WORKING PRESSURE SYSTEMS COMPATIBLE WITH TITANIUM, EXCEPT PORT END SIZES -20 AND -24 ARE FOR 4000 psi (16 000 psi BURST PRESSURE).

9. ADAPTERS TO BE INSTALLED INTO BOSS CAVITIES PER AS1300.

10. INVENTORIED PARTS CONFORMING TO THE PREVIOUS "LETTER CHANGE" MAY BE USED TO DEPLETION.

 An SAE International Group	AEROSPACE STANDARD	SAE AS4383 SHEET 2 OF 3	REV. C
	FITTING ASSEMBLY, REDUCER RING LOCKED PORT CONNECTION TO BEAM SEAL 5000 PSI /8/		