

REV. C

AS4409™

FEDERAL SUPPLY CLASS
4730

RATIONALE

WRENCH PAD DIMENSION V RELOCATED TO ACTUAL PAD FEATURE. "INACTIVE" REPLACED BY "NOT RECOMMENDED." CLASSES 3A AND 3B ADDED TO TABLE 1 HEADING FOR THE THREADS. MATERIAL CODE LETTER R, CRES 321, INTRODUCED AS AN OPTIONAL MATERIAL. FINISH FOR MATERIAL CODE LETTER R BEING INTRODUCED. PROCUREMENT SPECIFICATION NOTE UPDATED TO CURRENT QML VERBIAGE. UPDATED SPECIFICATION CALLOUTS FROM MIL-A-8625 TO MIL-PRF-8625 AND ARP4296 TO AS4296. NOTE /17/ REVISED TO REFLECT OPTIONAL DRY FILM CODE LETTER N CALLOUT FOR SWIVEL NUT. RECOMMENDATION USAGE NOTE FOR ALUMINUM IN NOTE /18/ REVISED. NEW USAGE RECOMMENDATION FOR MATERIAL 347 ADDED TO NOTE /18/. INVENTORY DISPOSITION NOTE 19 ADDED.

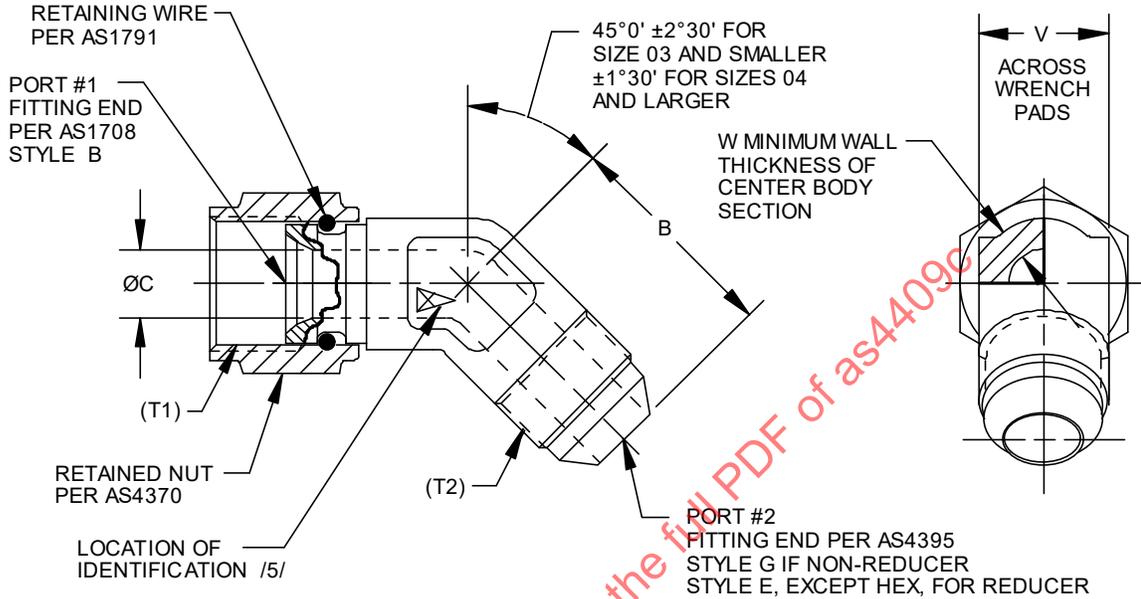


FIGURE 1 - FITTING ASSEMBLY, ELBOW 45°


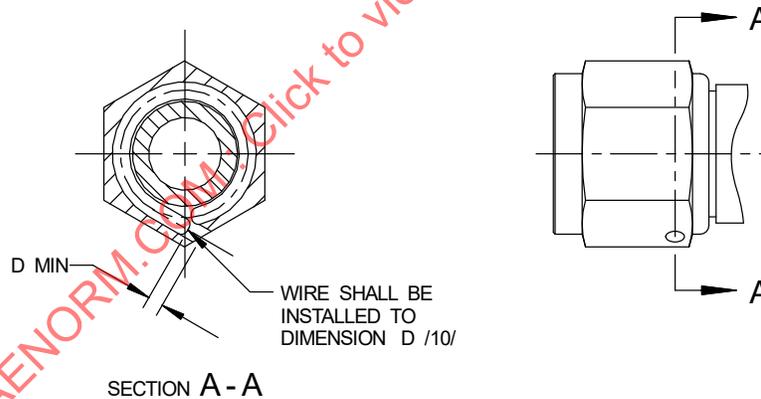


FIGURE 2 - INSTALLATION, RETAINED NUT AND RETAINING WIRE

NOT RECOMMENDED IN PART /18/

For more information on this standard, visit
<https://www.sae.org/standards/content/AS4409C>

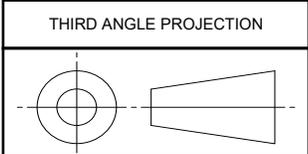

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

CUSTODIAN: G-3

PROCUREMENT SPECIFICATION: AS4841 /4/



AEROSPACE STANDARD
FITTING ASSEMBLY, ELBOW 45°,
REDUCER AND NONREDUCER,
INTERNAL FLARE TO FLARED TUBE

AS4409™
SHEET 1 OF 6

REV. C

ISSUED 1995-03 REAFFIRMED 2007-10 REVISED 2023-05

TABLE 1 - DIMENSIONS C-W AND WEIGHTS

BASIC NO. AS4409 /17/ SIZE CODE	(NOMINAL TUBE SIZE)	T1, T2 THREAD PER AS8879 CLASS 3B, 3A	C	D	V	W	LB/EA	LB/EA	LB/EA
							APPROX REF ALUM	APPROX REF CRES	APPROX REF TI
02	.125	.3125-24 UNJF	.058- .065	.045	.297- .314	.090	.012	.034	.019
03	.188	.3750-24 UNJF	.121- .128	.045	.360- .377	.100	.021	.060	.034
04	.250	.4375-20 UNJF	.168- .175	.045	.423- .440	.110	.025	.072	.041
05	.312	.5000-20 UNJF	.230- .237	.045	.485- .502	.120	.032	.092	.053
06	.375	.5625-18 UNJF	.293- .301	.045	.547- .565	.120	.044	.123	.071
08	.500	.7500-16 UNJF	.387- .395	.055	.735- .753	.150	.077	.224	.140
10	.625	.8750-14 UNJF	.480- .488	.063	.860- .878	.170	.118	.343	.196
12	.750	1.0625-12 UNJ	.604- .614	.095	1.047-1.065	.185	.196	.570	.326
16	1.000	1.3125-12 UNJ	.839- .851	.125	1.292-1.317	.205	.294	.852	.488
20	1.250	1.6250-12 UNJ	1.073-1.086	.155	1.605-1.630	.240	.551	1.600	.916
24	1.500	1.8750-12 UNJ	1.307-1.320	.180	1.855-1.880	.250	.734	2.130	1.220
32	2.000	2.5000-12 UNJ	1.776-1.791	.180	2.542-2.572	.350	.961	2.790	1.598

TABLE 2 - LEG LENGTH A

SIZE OF PORT #1	FORG. SIZE /8/ 02	FORG. SIZE /8/ 03	FORG. SIZE /8/ 04	FORG. SIZE /8/ 05	FORG. SIZE /8/ 06	FORG. SIZE /8/ 08	FORG. SIZE /8/ 10	FORG. SIZE /8/ 12	FORG. SIZE /8/ 16	FORG. SIZE /8/ 20	FORG. SIZE /8/ 24	FORG. SIZE /8/ 32
02	.403	.414	.427	.439	.466	.504	.530	.596	.634	.699	.796	.940
03	--	.416	.430	.442	.469	.507	.533	.572	.637	.702	.799	.943
04	--	--	.438	.450	.477	.515	.541	.580	.645	.710	.807	.951
05	--	--	--	.492	.519	.557	.583	.622	.687	.752	.798	.998
06	--	--	--	--	.603	.641	.667	.706	.771	.836	.888	1.029
08	--	--	--	--	--	.749	.775	.814	.878	.943	.995	1.091
10	--	--	--	--	--	--	.825	.864	.927	.992	1.044	1.139
12	--	--	--	--	--	--	--	.828	.892	.957	1.009	1.139
16	--	--	--	--	--	--	--	--	.911	.976	1.028	1.191
20	--	--	--	--	--	--	--	--	--	1.023	1.075	1.284
24	--	--	--	--	--	--	--	--	--	--	1.155	1.327
32	--	--	--	--	--	--	--	--	--	--	--	1.483

TABLE 3 - LEG LENGTH B

SIZE OF PORT #2	FORG. SIZE /8/ 02	FORG. SIZE /8/ 03	FORG. SIZE /8/ 04	FORG. SIZE /8/ 05	FORG. SIZE /8/ 06	FORG. SIZE /8/ 08	FORG. SIZE /8/ 10	FORG. SIZE /8/ 12	FORG. SIZE /8/ 16	FORG. SIZE /8/ 20	FORG. SIZE /8/ 24	FORG. SIZE /8/ 32
02	.664	.633	.633	.671	.728	.783	.807	.873	1.013	1.091	1.154	1.341
03	--	.664	.655	.702	.759	.814	.838	.904	1.044	1.122	1.185	1.372
04	--	--	.726	.773	.830	.885	.909	.975	1.115	1.193	1.256	1.443
05	--	--	--	.773	.830	.885	.909	.975	1.115	1.193	1.256	1.443
06	--	--	--	--	.836	.891	.915	.981	1.121	1.199	1.262	1.449
08	--	--	--	--	--	.992	1.016	1.082	1.222	1.300	1.363	1.550
10	--	--	--	--	--	--	1.117	1.183	1.323	1.401	1.464	1.651
12	--	--	--	--	--	--	--	1.289	1.429	1.507	1.570	1.757
16	--	--	--	--	--	--	--	--	1.476	1.554	1.617	1.804
20	--	--	--	--	--	--	--	--	--	1.601	1.664	1.851
24	--	--	--	--	--	--	--	--	--	--	1.789	1.976
32	--	--	--	--	--	--	--	--	--	--	--	2.226

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

a. DASH AS CODE LETTER:

- (1) BODY: TYPE 4130 STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758.
- (2) NUT: DASH AS CODE LETTER OF AS4370 (TYPE 4130 STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

b. CODE LETTER D /18/:

- (1) BODY: TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS4133; OR TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6; OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR AMS4339.
- (2) NUT: CODE LETTER D OF AS4370 (TYPE 2024 ALUMINUM ALLOY).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

c. CODE LETTER J:

- (1) BODY: TYPE 304 CORROSION-RESISTANT STEEL FORGING OR BAR PER AMS5639 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER J OF AS4370 (TYPE 304 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

d. CODE LETTER K:

- (1) BODY: TYPE 316 CORROSION-RESISTANT STEEL FORGING OR BAR PER AMS5648 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER K OF AS4370 (TYPE 316 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

e. CODE LETTER R:

- (1) BODY: TYPE 321 CORROSION-RESISTANT STEEL BAR PER AMS5645 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER R OF AS4370 (TYPE 321 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

f. CODE LETTER S: /18/

- (1) BODY: TYPE 347 CORROSION-RESISTANT STEEL FORGING OR BAR PER AMS5646 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER S OF AS4370 (TYPE 347 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

g. CODE LETTER T:

- (1) BODY: TYPE 6AI-4V TITANIUM ALLOY FORGING OR BAR PER AMS4928.
- (2) NUT: CODE LETTER T OF AS4370 (TYPE 6AI-4V TITANIUM ALLOY).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

	AEROSPACE STANDARD	AS4409™ SHEET 3 OF 6	REV. C
	FITTING ASSEMBLY, ELBOW 45°, REDUCER AND NONREDUCER, INTERNAL FLARE TO FLARED TUBE		

- h. CODE LETTER W:
- (1) BODY: TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS4141; OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124; OR TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9.
 - (2) NUT: CODE LETTER W OF AS4370 (TYPE 7075 ALUMINUM ALLOY).
 - (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).
2. HEAT TREATMENT PER PROCUREMENT SPECIFICATION.
3. FINISH:
- a. DASH AS MATERIAL CODE LETTER:
 - (1) BODY: CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2, DYE BLACK.
 - (2) NUT: DASH AS MATERIAL CODE LETTER OF AS4370 (CADMIUM PLATE, DYED BLACK).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).
 - b. MATERIAL CODE LETTER D:
 - (1) BODY: ANODIZE PER AMS2472 OR MIL-PRF-8625, TYPE II, CLASS 2, DYE BLUE, DUPLEX SEAL.
 - (2) NUT: MATERIAL CODE LETTER D OF AS4370 (ANODIC COATING, DYE BLUE).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).
 - c. MATERIAL CODE LETTER J:
 - (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
 - (2) NUT: MATERIAL CODE LETTER J OF AS4370 (PASSIVATED).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).
 - d. MATERIAL CODE LETTER K:
 - (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
 - (2) NUT: MATERIAL CODE LETTER K OF AS4370 (PASSIVATED).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).
 - e. MATERIAL CODE LETTER R:
 - (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
 - (2) NUT: MATERIAL CODE LETTER R OF AS4370 (PASSIVATED).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).
 - f. MATERIAL CODE LETTER S:
 - (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
 - (2) NUT: MATERIAL CODE LETTER S OF AS4370 (PASSIVATED).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).
 - g. MATERIAL CODE LETTER T:
 - (1) BODY: ANODIZE PER AMS2488 TYPE 2 OR FLUORIDE PHOSPHATE CONVERSION COAT PER AMS2486.
 - (2) NUT: MATERIAL CODE LETTER T OF AS4370 (FLUORIDE PHOSPHATE CONVERSION COAT).
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

	AEROSPACE STANDARD	AS4409™ SHEET 4 OF 6	REV. C
	FITTING ASSEMBLY, ELBOW 45°, REDUCER AND NONREDUCER, INTERNAL FLARE TO FLARED TUBE		