

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

AS4411

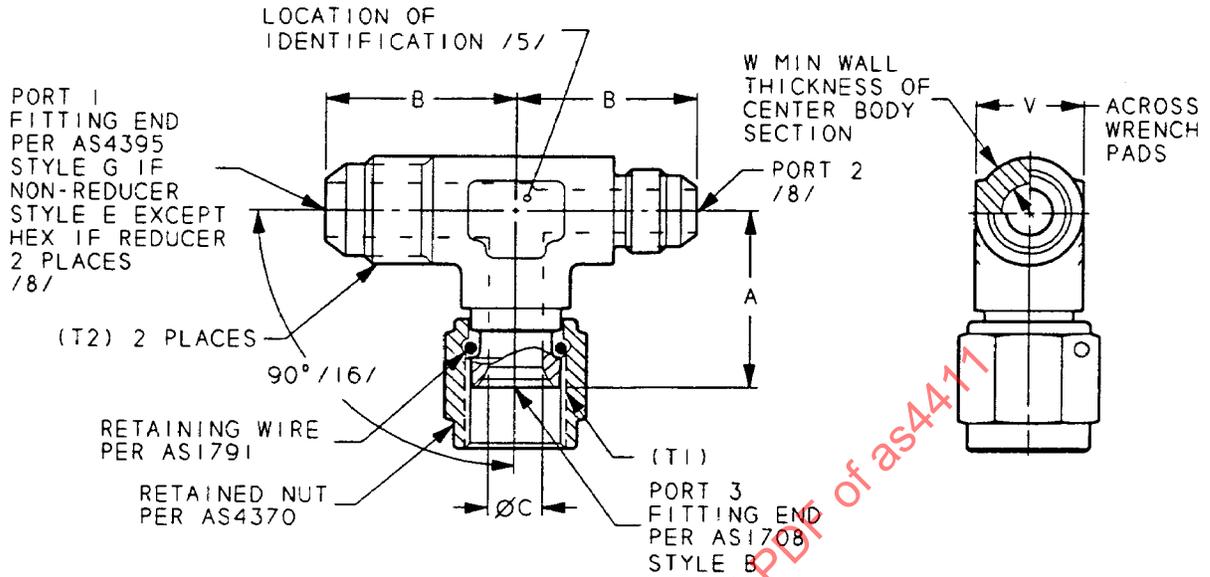


FIGURE 1 - FITTING ASSEMBLY, TEE


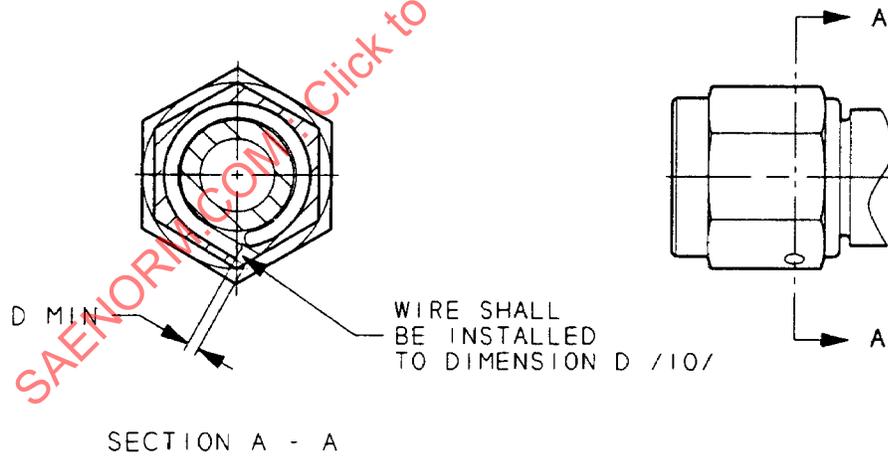


FIGURE 2 - INSTALLATION, RETAINED NUT AND RETAINING WIRE

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-5509

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
FITTING ASSEMBLY, TEE, REDUCER AND NONREDUCER
INTERNAL FLARE ON SIDE TO FLARED TUBE

AS4411
SHEET 1 OF 4

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS4411 /17/ SIZE CODE	(NOMINAL TUBE SIZE)	T1, T2 THREAD PER MIL-S-8879					LB/EA	LB/EA	LB/EA	
			C	D	V	W	MAX ALUM	MAX CRES	MAX TI	
02	.125	.3125-24 UNJF	.065	.058	.045	.313	.090	.022	.063	.036
03	.187	.3750-24 UNJF	.128	.121	.045	.375	.100	.028	.081	.046
04	.250	.4375-20 UNJF	.175	.168	.045	.438	.110	.036	.105	.060
05	.312	.5000-20 UNJF	.237	.230	.045	.500	.120	.045	.132	.076
06	.375	.5625-18 UNJF	.301	.293	.045	.563	.120	.061	.177	.101
08	.500	.7500-16 UNJF	.395	.387	.055	.750	.150	.113	.327	.187
10	.625	.8750-14 UNJF	.488	.480	.063	.875	.170	.155	.449	.257
12	.750	1.0625-12 UNJ	.614	.604	.095	1.063	.185	.280	.814	.466
16	1.000	1.3125-12 UNJ	.851	.839	.125	1.313	.205	.407	1.180	.676
20	1.250	1.6250-12 UNJ	1.086	1.073	.155	1.625	.240	.748	2.170	1.243
24	1.500	1.8750-12 UNJ	1.320	1.307	.180	1.875	.250	.996	2.890	1.655
32	2.000	2.5000-12 UNJ	1.791	1.776	.180	2.563	.350	1.302	3.780	2.165

TABLE 2 - LEG LENGTH A

SIZE OF PORT #3	FORG. SIZE /9/ 02	FORG. SIZE /9/ 03	FORG. SIZE /9/ 04	FORG. SIZE /9/ 05	FORG. SIZE /9/ 06	FORG. SIZE /9/ 08	FORG. SIZE /9/ 10	FORG. SIZE /9/ 12	FORG. SIZE /9/ 16	FORG. SIZE /9/ 20	FORG. SIZE /9/ 24	FORG. SIZE /9/ 32
02	.658	.686	.743	.767	.884	.924	1.100	1.157	1.268	1.521	1.521	2.031
03	--	.672	.555	.587	.649	.743	.838	.931	1.056	1.213	1.338	2.015
04	--	--	.602	.633	.695	.789	.883	.976	1.101	1.258	1.383	1.890
05	--	--	--	.675	.737	.831	.925	1.018	1.143	1.300	1.425	1.937
06	--	--	--	--	.821	.915	1.009	1.102	1.227	1.384	1.509	1.968
08	--	--	--	--	--	1.023	1.117	1.210	1.334	1.491	1.616	2.130
10	--	--	--	--	--	--	1.167	1.260	1.383	1.540	1.665	2.098
12	--	--	--	--	--	--	--	1.224	1.348	1.505	1.630	2.098
16	--	--	--	--	--	--	--	--	1.367	1.524	1.649	2.150
20	--	--	--	--	--	--	--	--	--	1.571	1.696	2.243
24	--	--	--	--	--	--	--	--	--	--	1.776	2.286
32	--	--	--	--	--	--	--	--	--	--	--	2.442

TABLE 3 - LEG LENGTH B

SIZE OF PORT #1 OR #2	FORG. SIZE /9/ 02	FORG. SIZE /9/ 03	FORG. SIZE /9/ 04	FORG. SIZE /9/ 05	FORG. SIZE /9/ 06	FORG. SIZE /9/ 08	FORG. SIZE /9/ 10	FORG. SIZE /9/ 12	FORG. SIZE /9/ 16	FORG. SIZE /9/ 20	FORG. SIZE /9/ 24	FORG. SIZE /9/ 32
02	.757	.789	.789	.843	.946	1.033	1.135	1.232	1.341	1.544	1.685	2.169
03	--	.820	.811	.874	.977	1.064	1.166	1.263	1.372	1.575	1.716	2.200
04	--	--	.882	.945	1.048	1.135	1.237	1.334	1.443	1.646	1.787	2.271
05	--	--	--	.945	1.048	1.135	1.237	1.334	1.443	1.646	1.787	2.271
06	--	--	--	--	1.054	1.141	1.243	1.340	1.449	1.652	1.793	2.277
08	--	--	--	--	--	1.242	1.344	1.441	1.555	1.753	1.894	2.378
10	--	--	--	--	--	--	1.445	1.542	1.651	1.854	1.995	2.479
12	--	--	--	--	--	--	--	1.648	1.757	1.960	2.101	2.585
16	--	--	--	--	--	--	--	--	1.804	2.007	2.148	2.632
20	--	--	--	--	--	--	--	--	--	2.054	2.195	2.679
24	--	--	--	--	--	--	--	--	--	--	2.320	2.804
32	--	--	--	--	--	--	--	--	--	--	--	3.054

AS4411

AS4411

NOTES:

1/ MATERIAL:

- a. NO CODE LETTER:
 - (1) BODY: TYPE 4130 STEEL FORGING OR BAR PER AMS 6370 OR MIL-S-6758
 - (2) NUT: CODE LETTER NONE OF AS4370 (TYPE 4130 STEEL)
 - (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION RESISTANT STEEL)
- b. CODE LETTER D:
 - (1) BODY: 2014T6 ALUMINUM ALLOY FORGING PER AMS 4133 OR QQ-A-367; OR 2024T6 ALUMINUM ALLOY BAR PER ANS4112 OR QQ-A-225/6; OR 2024T851 ALUMINUM ALLOY BAR PER QQ-A-225/6
 - (2) NUT: CODE LETTER D OF AS4370 (TYPE 2024 ALUMINUM ALLOY)
 - (3) WIRE: PER AS1791 (TYPE 302 OR 305 CORROSION RESISTANT STEEL)
- c. CODE LETTER J:
 - (1) BODY: 30304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5639 OR 304 CORROSION RESISTANT STEEL PER QQ-S-763
 - (2) NUT: CODE LETTER J OF AS4370 (TYPE 304 CORROSION RESISTANT STEEL)
 - (3) WIRE: PER AS1791 (TYPE 302 OR 305 CORROSION RESISTANT STEEL)
- d. CODE LETTER K:
 - (1) BODY: 30316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5648 OR 316 CORROSION RESISTANT STEEL PER QQ-S-763
 - (2) NUT: CODE LETTER K OF AS4370 (TYPE 316 CORROSION RESISTANT STEEL)
 - (3) WIRE: PER AS1791 (TYPE 302 OR 305 CORROSION RESISTANT STEEL)
- e. CODE LETTER S:
 - (1) BODY: 30347 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5646 OR 347 CORROSION RESISTANT STEEL PER QQ-S-763
 - (2) NUT: CODE LETTER S OF AS4370 (TYPE 347 CORROSION RESISTANT STEEL)
 - (3) WIRE: PER AS1791 (TYPE 302 OR 305 CORROSION RESISTANT STEEL)
- f. CODE LETTER T:
 - (1) BODY: 6AL-4V TITANIUM ALLOY FORGING OR BAR PER AMS 4928
 - (2) NUT: CODE LETTER T OF AS4370 (TYPE 6AL4V TITANIUM)
 - (3) WIRE: PER AS1791 (TYPE 302 OR 305 CORROSION RESISTANT STEEL)
- g. CODE LETTER W:
 - (1) BODY: 7075T73 ALUMINUM ALLOY FORGING PER AMS 4141 OR QQ-A-367; OR 7075T7351 ALUMINUM ALLOY BAR PER AMS 4124; OR 7075T73 ALUMINUM ALLOY BAR PER QQ-A-225/9
 - (2) NUT: CODE LETTER W OF AS4370 (TYPE 7075 ALUMINUM ALLOY)
 - (3) WIRE: PER AS1791 (TYPE 302 OR 305 CORROSION RESISTANT STEEL)

2. HEAT TREAT PER PROCUREMENT SPECIFICATION.

13/ FINISH:

- a. NO CODE LETTER:
 - (1) BODY: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2, DYE BLACK
 - (2) NUT: NO CODE LETTER OF AS4370 (CADMIUM PLATE, DYE BLACK)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)
- b. CODE LETTER D:
 - (1) BODY: ANODIZE PER AMS 2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BLUE, DUPLEX SEAL
 - (2) NUT: CODE LETTER D OF AS4370 (ANODIC COATING, DYE BLUE)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)
- c. CODE LETTER J:
 - (1) BODY: PASSIVATE PER QQ-P-35, TYPE VI OR TYPE VII
 - (2) NUT: CODE LETTER J OF AS4370 (PASSIVATED)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)
- d. CODE LETTER K:
 - (1) BODY: PASSIVATE PER QQ-P-35, TYPE VI OR TYPE VII
 - (2) NUT: CODE LETTER K OF AS4370 (PASSIVATED)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)
- e. CODE LETTER S:
 - (1) BODY: PASSIVATE PER QQ-P-35, TYPE VI OR TYPE VII
 - (2) NUT: CODE LETTER S OF AS4370 (PASSIVATED)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)
- f. CODE LETTER T:
 - (1) BODY: FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486
 - (2) NUT: CODE LETTER T OF AS4370 (FLUORIDE PHOSPHATE CONVERSION COAT)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)
- g. CODE LETTER W:
 - (1) BODY: ANODIZE PER AMS 2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BROWN, DUPLEX SEAL
 - (2) NUT: CODE LETTER W OF AS4370 (ANODIC COATING, DYE BROWN)
 - (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT)