

AS4568

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

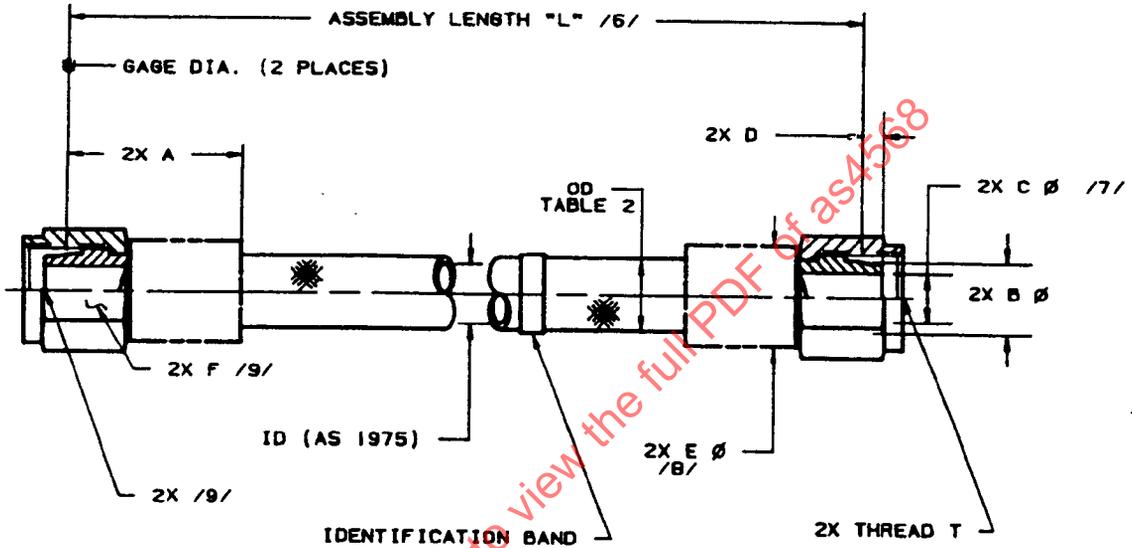


FIGURE 1 - HOSE ASSEMBLY, STRAIGHT TO STRAIGHT

ISSUED 1992-06-22 REVISED

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS1975 /2/

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

HOSE ASSEMBLY, PTFE, ARAMID REINFORCED
STANDARD DUTY, 4000/3000 psi, 275 °F, TITANIUM
FITTINGS, FLARELESS, STRAIGHT TO STRAIGHT

AS4568

SHEET 1 OF 7

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY NO. & SIZE CODE	HOSE SIZE (REF)	/15/ FITTING TYPE (REF)	THREAD T PER MIL-S-8879 (REF)	IO MIN (REF)	A MAX	B GAGE ϕ BASIC	C /7/ MIN FTG BORE ϕ AFTER ASSEMBLY	O (REF)	E /8/ ϕ MAX WITHOUT SLEEVING
AS4568E	.250	-							
AS4568E	.250	S	.4375-20UNJF-3B	.212	1.630	.2930	.135	.16	.69
AS4568E	.250	E	.5625-18UNJF-3B	.212	1.695	.4120	.135	.16	.69
AS4568G	.375	R	.4375-20UNJF-3B	.298	1.725	.2930	.135	.16	.80
AS4568G	.375	S	.5625-18UNJF-3B	.298	1.835	.4120	.240	.16	.80
AS4568G	.375	E	.7500-16UNJF-3B	.298	1.915	.5600	.240	.19	.80
AS4568H	.500	R	.5625-18UNJF-3B	.391	2.145	.4120	.240	.16	.97
AS4568H	.500	S	.7500-16UNJF-3B	.391	2.165	.5600	.340	.19	.97
AS4568H	.500	E	.8750-14UNJF-3B	.391	2.675	.6730	.340	.20	.97
AS4568J	.625	R	.7500-16UNJF-3B	.485	2.860	.5600	.340	.19	1.15
AS4568J	.625	S	.8750-14UNJF-3B	.485	2.905	.6730	.410	.20	1.15
AS4568J	.625	E	1.0625-12UNJ-3B	.485	2.920	.8100	.410	.23	1.15
AS4568K	.750	R	.8750-14UNJF-3B	.602	3.240	.6730	.410	.20	1.38
AS4568K	.750	S	1.0625-12UNJ-3B	.602	3.205	.8100	.510	.23	1.38
AS4568K	.750	E	1.3125-12UNJ-3B	.602	3.320	1.0620	.510	.30	1.38
AS4568M	1.000	R	1.0625-12UNJ-3B	.852	3.690	.8100	.510	.23	1.66
AS4568M	1.000	S	1.3125-12UNJ-3B	.852	3.740	1.0620	.760	.30	1.66
AS4568M	1.000	E	1.5625-12UNJ-3B	.852	3.570	1.3160	.760	.04	1.66
AS4568N	1.250	R	1.3125-12UNJ-3B	1.100	4.600	1.0620	.760	.30	2.33
AS4568N	1.250	S	1.5625-12UNJ-3B	1.100	4.330	1.3160	.960	.04	2.33
AS4568N	1.250	-	TBD	TBD	TBD	TBD	TBD	TBD	TBD
AS4568P	1.500	-							
AS4568P	1.500	S	TBD	TBD	TBD	TBD	TBD	TBD	TBD
AS4568P	1.500	-							

TABLE 1 (Continued)

HOSE ASSEMBLY NO. & SIZE CODE	HOSE SIZE (REF)	/15/ FITTING TYPE (REF)	F HEX (REF)	BALL SIZE MIN THRU ϕ /7/ MS19059 DASH NO.	BALL SIZE MIN THRU ϕ /7/ ϕ IN
AS4568E	.250	-			
AS4568E	.250	S	.56	4807	.109
AS4568E	.250	E	.69	4807	.109
AS4568G	.375	R	.56	4807	.109
AS4568G	.375	S	.69	4812	.188
AS4568G	.375	E	.88	4812	.188
AS4568H	.500	R	.69	4812	.188
AS4568H	.500	S	.88	4816	.313
AS4568H	.500	E	1.00	4816	.313
AS4568J	.625	R	.88	4816	.313
AS4568J	.625	S	1.00	4818	.375
AS4568J	.625	E	1.25	4818	.375
AS4568K	.750	R	1.00	4818	.375
AS4568K	.750	S	1.25	4821	.469
AS4568K	.750	E	1.50	4821	.469
AS4568M	1.000	R	1.25	4821	.469
AS4568M	1.000	S	1.50	4829	.719
AS4568M	1.000	E	1.81	4829	.719
AS4568N	1.250	R	1.50	4829	.719
AS4568N	1.250	S	1.81	4834	.875
AS4568N	1.250	-	TBD	TBD	TBD
AS4568P	1.500	-	TBD	TBD	TBD
AS4568P	1.500	S	TBD	TBD	TBD
AS4568P	1.500	-			

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETER

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	TOLERANCE	HOSE SIZE /10/		HOSE SIZE /10/		HOSE SIZE /10/		HOSE SIZE /10/	
				MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
-	(-) INDICATES BRAIDED HOSE ONLY PER AS1975	275		.465	.555	.495	.715	.920	1.075	1.365	1.660
A	FIRE SLEEVE (AS1072 SIL FG) (5 min) /11/ /12/	275		.840	.970	.655	1.150	1.380	1.590	1.750	1.950
B	FIRE SLEEVE INTEGRAL SILICONE (5 min) /13/	275		.658	.788	.968	1.198	1.310	1.568	1.768	TBD
C	PROTECTIVE SLEEVE SHRINK-ON (POLYOLEFIN AS1073 CODE B) /21/	275		TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

TABLE 3 - ASSEMBLY PROCUREMENT LENGTHS

HOSE ASSEMBLY LENGTH	AVAILABLE INCREMENTS	TOLERANCE
UNDER 18 in	(NOT LESS THAN) .125 in	±.125 in
18 THRU 36 in	(NOT LESS THAN) .250 in	±.250 in
OVER 36 THRU 50 in	(NOT LESS THAN) .500 in	±.500 in
OVER 50 in	(NOT LESS THAN) 1.000 in	±1%

