

RATIONALE

AS4591 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

AS4591

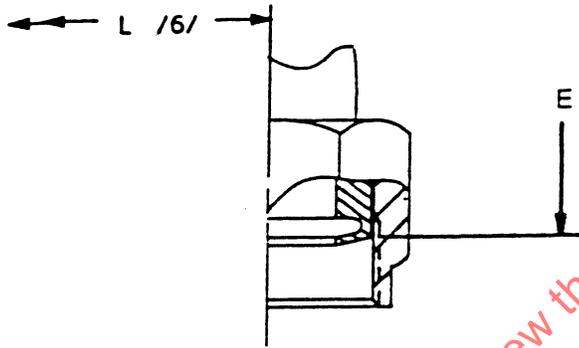
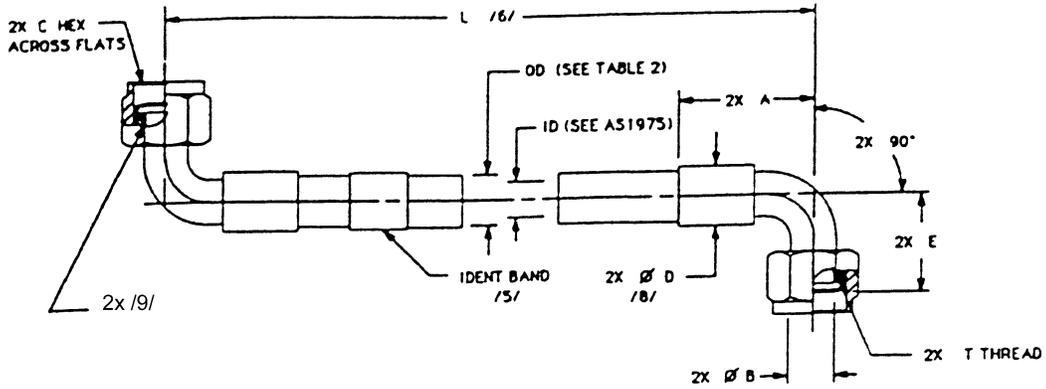


FIGURE 1 - ENLARGED VIEW - 90° END FITTING

SAENORM.COM. Click to view the full PDF of as4591


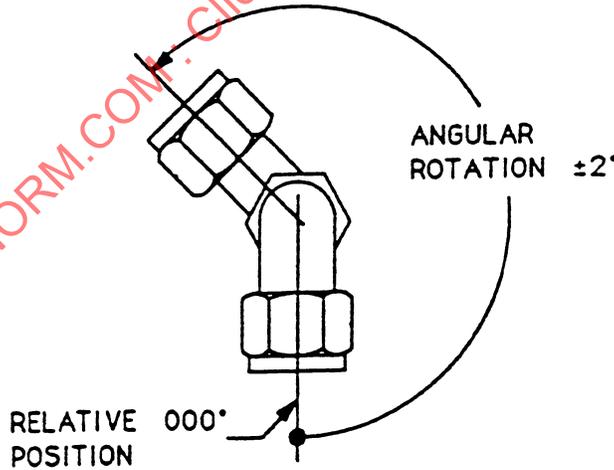


FIGURE 2 - ASSEMBLY ORIENTATION

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS4591>

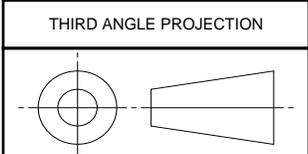

CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS1975 /2/



AEROSPACE STANDARD

HOSE ASSEMBLY, PTFE, PARA-ARAMID REINFORCED, STANDARD DUTY, 4000 PSI, 275 °F, TITANIUM FITTINGS, BEAM SEAL, 90° TO 90°

AS4591
SHEET 1 OF 4

ISSUED 2001-03 REAFFIRMED 2015-04

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY NO. & SIZE CODE /21/	HOSE SIZE (REF)	THREAD T PER AS8879 (REF)	HOSE		C HEX (REF)	D /8/ DIA MAX WITHOUT SLEEVING	E MIN	E MAX	SPHERICAL BALL SIZE FOR DETERMINING MINIMUM HOSE ASSEMBLY ID /7/ IN
			ID MIN	A ₁ MAX					
AS4591E	.250	.4375-20UNJS-3B	.212	1.880	.56	.69	.576	.701	.115
AS4591G	.375	.5625-20UNJS-3B	.298	2.180	.69	.80	.610	.735	.204
AS4591H	.500	.7188-20UNJS-3B	.391	2.530	.88	.97	.693	.818	.289
AS4591J	.625	.8438-18UNJS-3B	.485	3.375	1.00	1.15	.834	.959	.349
AS4591K	.750	1.000-16UNJ-3B	.602	3.940	1.25	1.38	.988	1.113	.434
AS4591M	1.000	1.250-14UNJS-3B	.852	4.485	1.50	1.66	1.167	1.292	.646

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETER

SLEEVE CODE /22/	SLEEVE MATERIAL	TEMP LIMIT °F	TOLERANCE	HOSE	HOSE	HOSE	HOSE	HOSE	HOSE
				SIZE /10/ .250	SIZE /10/ .375	SIZE /10/ .500	SIZE /10/ .625	SIZE /10/ .750	SIZE /10/ 1.000
-	(-) INDICATES BRAIDED HOSE ONLY PER AS1975	275	MAX MIN	.465 .405	.555 .495	.715 .655	.920 .850	1.075 .995	1.365 1.285
A	FIRESLLEEVE (AS1072 SIL - FG) (5 min) /11/ /12/	275	MAX MIN	.840 .658	.970 .788	1.150 .968	1.380 1.198	1.590 1.318	1.750 1.568
B	FIRESLLEEVE INTEGRAL SILICONE (5 min) /13/	275	MAX MIN						
C	PROTECTIVE SLEEVE SHRINK-ON (POLYOLEFIN AS1073 CODE B)	275	MAX MIN	.520 .450	.620 .550	.795 .725	1.000 .920	1.170 1.060	1.460 1.350

TABLE 3 - ASSEMBLY LENGTH TOLERANCES

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in EXCLUSIVE	±.250 in
36 TO 50 in EXCLUSIVE	±.500 in
50 in AND OVER	±1%

**AEROSPACE STANDARD**

HOSE ASSEMBLY, PTFE, PARA-ARAMID REINFORCED,
STANDARD DUTY, 4000 PSI, 275 °F, TITANIUM
FITTINGS, BEAM SEAL, 90° TO 90°

AS4591
SHEET 2 OF 4

TABLE 4 - HOSE AND FITTING WEIGHTS

HOSE OR SLEEVE CODE /22/	HOSE OR TYPE SLEEVE	UNITS	HOSE SIZE					
			.250	.375	.500	.625	.750	1.000
-	BRAIDED HOSE ONLY PER AS1975	LB/IN (MAX)	.006	.008	.012	.020	.025	.040
A	FIRE SLEEVE AS1072 (5 min PER AS1055) /15/	LB/IN	.012	.017	.018	.028	.030	.037
B	FIRE SLEEVE INTEGRAL WITH HOSE (5 min PER AS1055) /15/	LB/IN						
C	PROTECTIVE SLEEVE SHRINK-ON (POLYOLEFIN AS1073, CODE B)	LB/IN	.001	.001	.001	.002	.002	.003
NONE	FIRE SLEEVE CLAMP	LB/EA (REF)	.020	.020	.021	.021	.025	.025
NONE	FITTING END (90°) TITANIUM /16/	LB/EA (REF)	.067	.121	.206	.290	.490	.627

NOTES:

1. MATERIALS:
 - a. HOSE AND FITTINGS - PER AS1975
 - b. SLEEVES - SEE APPLICABLE STANDARDS, TABLE 2
- /2/ THIS PRODUCT SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS1975 CLASS 4000. USERS OF THIS STANDARD SHALL PROCURE THIS PRODUCT FROM ACCREDITED MANUFACTURER(S), OR THEIR ACCREDITED DISTRIBUTOR(S), AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS1975 CLASS 4000 FOR THIS STANDARD. CHANGE-OVER FROM USER-QPL TO PRI-QPL SHALL BE IN ACCORDANCE WITH AS1975 REVISION C OR HIGHER AND BE COMPLETED WITHIN SIX MONTHS FROM THE DATE OF ISSUE OF THIS STANDARD.
3. CONSTRUCTION AND PERFORMANCE PER AS1975 CLASS 4000. FITTINGS SHALL BE PERMANENTLY ATTACHED TO THE HOSE.
4. OPERATING CHARACTERISTICS PER AS1975.
- /5/ MARKING: MARKING SHALL BE PER AS1975 ON A STAINLESS STEEL BAND NOT OVER 1.0 in WIDE OR ON THE COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 in HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOVEMENT AND RESULTANT CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND. HOSE ASSEMBLY DATE AND "PT" SYMBOL SHALL BE PERMANENTLY MARKED ON THE BAND OR ON AN END FITTING OR A FIRE SLEEVE CLAMP. MARKING BAND SHALL BE COVERED WITH TRANSPARENT POLYOLEFIN SHRINK SLEEVE PER AS1073 CODE A.
- /6/ LENGTH "L" IS A THREE DIGIT NUMBER OF WHICH THE FIRST TWO DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE THIRD DIGIT, THE FRACTIONS OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM THE OUTER CORNER OF THE SEALING SURFACE TO OUTER CORNER OF SEALING SURFACE AS SHOWN IN FIGURE 1. FOR LENGTH TOLERANCES SEE TABLE 3.
- /7/ A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED THROUGH THE FITTING ID. HOWEVER, THE APPLICABLE MINIMUM BALL DIAMETER LISTED IN TABLE 1 MUST BE CAPABLE OF PASSING THROUGH THE HOSE ASSEMBLY.
- /8/ DISTANCE ACROSS CORNERS OF THE HEX MAY EXCEED THIS DIMENSION.
- /9/ STANDARD COUPLING NUTS SHALL MATE WITH MIL-F-85421/1 OR AS4207 FITTING ENDS. NONSTANDARD COUPLING NUTS MAY BE USED PROVIDED THEY ARE FUNCTIONALLY EQUIVALENT AND PROVIDED THEY CANNOT BE REMOVED FROM THE FITTING. NUTS SHALL MEET THE TORQUE TEST REQUIREMENTS PER AS1975.