

FEDERAL SUPPLY CLASS
4720

REV.
A

AS4624



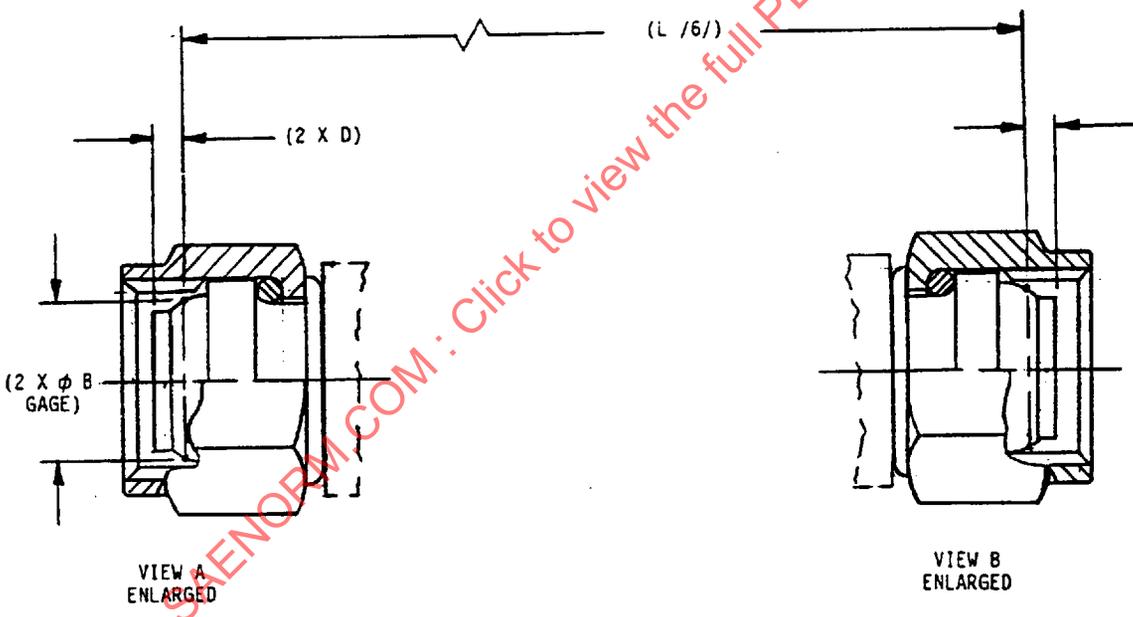


FIGURE 1 - FLARELESS HOSE ASSEMBLY, STRAIGHT TO STRAIGHT

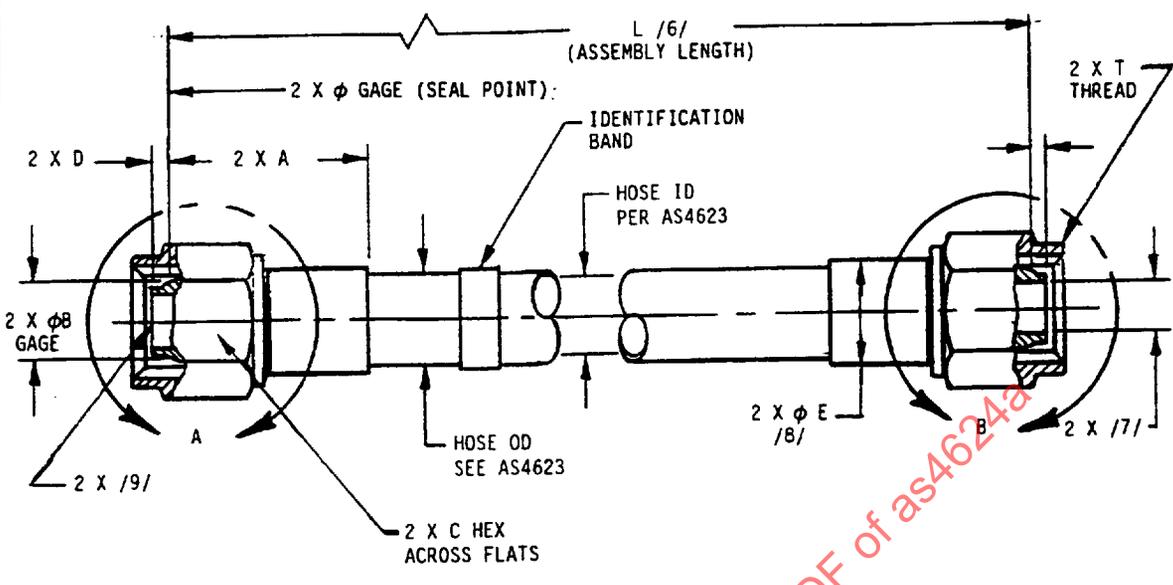

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: /2/ AS4623

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD
HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID
REINFORCED, HEAVY-DUTY, 275 °F, 3000 psi FLARELESS,
TITANIUM FITTINGS, INCLUDING JUMP SIZE, STRAIGHT TO STRAIGHT

AS4624 REV.
SHEET 1 OF 5 A

ISSUED 1992-06-25 REVISED 1993-06-04 (A)

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS4624

REV. A

TABLE 1 - HOSE AND FITTING DIMENSIONS

BASIC HOSE ASSEMBLY NO. AS4624 SIZE CODE	SIZE	/14/ FITTING TYPE	THREAD T PER MIL-S-8879	A MAX	φ B GAGE BASIC	C HEX	D	φ/8/ MAX	E THRU /7/ MS19059 DASH NO.	BALL SIZE MIN THRU /7/ IN
E	.250	--	--	--	--	--	--	--	--	--
E	.250	S	.4375-20UNJF-3B	1.630	.2930	.56	.16	.69	4807	.109
E	.250	E	.5625-18UNJF-3B	1.695	.4120	.69	.16	.69	4807	.109
G	.375	R	.4375-20UNJF-3B	1.740	.2930	.56	.16	.80	4807	.109
G	.375	S	.5625-18UNJF-3B	1.835	.4120	.69	.16	.80	4812	.188
G	.375	E	.7500-16UNJF-3B	1.930	.5600	.88	.19	.80	4812	.188
H	.500	R	.5625-18UNJF-3B	2.145	.4120	.69	.16	.97	4812	.188
H	.500	S	.7500-16UNJF-3B	2.165	.5600	.88	.19	.97	4816	.313
H	.500	E	.8750-14UNJF-3B	2.675	.6730	1.00	.20	.97	4816	.313
J	.625	R	.7500-16UNJF-3B	2.860	.5600	.88	.19	1.15	4816	.313
J	.625	S	.8750-14UNJF-3B	2.905	.6730	1.00	.20	1.15	4818	.375
J	.625	E	1.0625-12UNJ-3B	2.920	.8100	1.25	.23	1.15	4818	.375
K	.750	R	.8750-14UNJF-3B	3.240	.6730	1.00	.20	1.38	4818	.375
K	.750	S	1.0625-12UNJ-3B	3.205	.8100	1.25	.23	1.38	4821	.469
K	.750	E	1.3125-12UNJ-3B	3.320	1.0620	1.50	.30	1.38	4821	.469
M	1.000	R	1.0625-12UNJ-3B	3.690	.8100	1.25	.23	1.66	4821	.469
M	1.000	S	1.3125-12UNJ-3B	3.740	1.0620	1.50	.30	1.66	4829	.719
M	1.000	E	1.5625-12UNJ-3B	3.570	1.3160	1.81	.04	1.66	4829	.719
N	1.250	--	--	--	--	--	--	--	--	--
N	1.250	S	1.5625-12UNJ-3B	4.330	1.3160	1.81	.04	2.32	4834	.875
N	1.250	--	--	--	--	--	--	--	--	--

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETERS /10/

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	HOSE SIZE .250	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.000	HOSE SIZE 1.250
-	(-) INDICATES HOSE ONLY	275	--	--	--	--	--	--	--
A	NO SLEEVE (SEE AS4623)	275	.930/.730	1.070/.880	1.205/1.015	1.370/1.130	1.590/1.380	1.847/1.677	2.130/1.950
B	FIRE SLEEVE (AS1072 SIL-FG) (5 min) /11/ /12/ /13/ ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073-CODE B) /20/	275	.596/.524	.760/.680	.905/.825	1.030/.940	1.302/1.198	1.599/1.495	.884/1.776



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID REINFORCED, HEAVY-DUTY, 275 °F, 3000 psi FLARELESS, TITANIUM FITTINGS, INCLUDING JUMP SIZE, STRAIGHT TO STRAIGHT

AS4624 SHEET 2 OF 5

REV. A

AS4624

REV.
A

TABLE 3 - HOSE ASSEMBLY LENGTH TOLERANCES

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 THRU 36 in	±.250 in
OVER 36 THRU 50 in	±.500 in
OVER 50 in	±1%

TABLE 4 - MAXIMUM HOSE AND FITTING WEIGHTS

HOSE OR SLEEVE CODE	HOSE, PART OR SLEEVE	UNITS	HOSE SIZE						
-	HOSE ONLY (SEE AS4623)	LB/IN	--	--	--	--	--	--	--
A	FIRE SLEEVE AS1072 (5 MIN PER AS1055) /15/	LB/IN	--	--	--	--	--	--	--
B	PROTECTIVE SLEEVE SHRINK-ON (POLYOLEFIN AS1073, CODE B) /20/	LB/IN	.0006	.0012	.0018	.0018	.0032	.0032	.0049
NONE	FIRE SLEEVE CLAMP	LB/EA	.020	.020	.021	.021	.025	.025	.032
NONE	FITTING END (STRAIGHT) /14/ /16/	R LB/EA	--	.077	.118	.186	.427	.823	--
		S LB/EA	.054	.081	.135	.200	.476	.853	TBD /9/
		E LB/EA	.074	.115	.193	.267	.591	1.000	--

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID REINFORCED, HEAVY-DUTY, 275 °F, 3000 psi FLARELESS, TITANIUM FITTINGS, INCLUDING JUMP SIZE, STRAIGHT TO STRAIGHT

AS4624

SHEET 3 OF 5

REV.**A**

REV.
A

AS4624

NOTES:

1. MATERIALS:
 - a. HOSE AND FITTINGS - PER AS4623
 - b. THE COLLARS MAY BE STAINLESS STEEL /16/
 - c. SLEEVES - SEE APPLICABLE STANDARDS, TABLE 2
- /2/ THIS HOSE ASSEMBLY SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS4623. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.
3. CONSTRUCTION AND PERFORMANCE PER AS4623. FITTINGS SHALL BE PERMANENTLY ATTACHED TO THE HOSE.
4. OPERATING CHARACTERISTICS PER AS4623.
- /5/ MARKING: MARKING SHALL BE PER AS4623 ON A STAINLESS STEEL BAND NOT OVER 1.0 in WIDE OR ON THE COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 in HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOVEMENT AND RESULTANT CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND. HOSE ASSEMBLY DATE AND "PT" SYMBOL SHALL BE ELECTROETCHED ON THE BAND OR ON AN END FITTING OR A FIRESLEEVE CLAMP. MARKING BAND SHALL BE COVERED WITH TRANSPARENT POLYOLEFIN SHRINK SLEEVE PER AS1073 CODE A.
- /6/ HOSE LENGTH: LENGTH "L" IS A FOUR DIGIT NUMBER OF WHICH THE FIRST THREE DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE FOURTH DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM "GAGE DIAMETER" TO "GAGE DIAMETER". FOR LENGTH INCREMENTS AND TOLERANCES SEE TABLE 3. TO CONVERT "GAGE DIAMETER" TO "GAGE DIAMETER" TO "END TO END" MEASUREMENT, ADD TWO TIMES "D" TO LENGTH "L".
- /7/ A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED THROUGH THE FITTING I.D. HOWEVER, THE APPLICABLE BALL DIAMETER LISTED IN TABLE 1 MUST BE CAPABLE OF PASSING THROUGH THE HOSE ASSEMBLY.
- /8/ DISTANCE ACROSS CORNERS OF THE COUPLING NUT MAY EXCEED THIS DIMENSION.
- /9/ FITTING ENDS SIZE -4 THRU -16 MUST COMPLY TO NAS1760; FITTINGS FOR HOSE SIZE -20 AND LARGER TO COMPLY WITH AS4703. FITTINGS SHALL MATE WITH MS33514 FOR SIZES THRU -16 AND WITH AS4658 OR AS4659 IN SIZES -20 AND LARGER. -20 AND LARGER NUTS SHALL CONFORM TO AS4660 OR AS4702. STANDARD COUPLING NUTS SHALL BE IN ACCORDANCE WITH OR EQUIVALENT TO AS1790 OR AS1792.
- /10/ CLAMP DIAMETERS: DIAMETERS ARE LISTED FOR CLAMP SELECTION. TUBULAR SLEEVES MAY NOT BE A PERFECT ROUND AND SHALL BE MEASURED WITH A DIAMETER TAPE RULE (OFTEN REFERRED TO AS A PI-TAPE).
- /11/ SLEEVE DIAMETERS: THE TABLE 2 SLEEVE DIAMETERS FOR AS1072 SLEEVES APPLY WHEN THE SLEEVE IS COMPRESSED, OR CLAMPED TO CONTACT THE HOSE, IN THIS CASE, A WRINKLE MAY OCCUR OVER APPROXIMATELY 10% OF THE SLEEVE CIRCUMFERENCE.
- /12/ FIRESLEEVE: THE CUT ENDS OF THE FIRESLEEVE SHALL BE COATED WITH RTV SILICONE RUBBER PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. THE FIRESLEEVE ENDS SHALL BE SECURED TO THE HOSE ASSEMBLY END FITTINGS WITH CORROSION RESISTANT STEEL BANDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRESLEEVE, WHICH EXPOSE THE FIBERGLASS, SHALL BE COATED WITH RTV SILICONE RUBBER.
- /13/ IDENTIFICATION MARKING: ADD "AS1055 TYPE 11b CLASS A-S/P" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE RESISTANT 275°F (5 min), WITH AS1072."
- /14/ JUMP SIZE CODE EXPLANATION:
 - a. R-STEP DOWN 1 STANDARD LETTER SIZE PER TABLE 1 (REDUCED)
 - b. S-HOSE SIZE (NO REDUCTION OR EXPANSION)
 - c. E-STEP UP 1 STANDARD LETTER SIZE PER TABLE 1 (EXPANDED)
 NOTE: WHEN FITTING SIZE CHANGES EXIST, SPECIFY SMALLER FITTING PRIOR TO THE LARGER FITTING IN THE PART NUMBER.
- /15/ WHEN FIRESLEEVES ARE REQUIRED, WEIGHT LIMITS SHALL BE DEFINED BY THE PROCURING AUTHORITY.
- /16/ TITANIUM PARTS MAY BE REPLACED WITH STAINLESS STEEL IF MAXIMUM WEIGHT FOR FITTING IS NOT EXCEEDED.
17. DIMENSIONING AND TOLERANCING: ANSI Y14.5M.
- /18/ LOCKWIRE HOLES LOCATION AND DIAMETER PER AS1043 CODED AS FOLLOWS:
 - a. U = TWO HOLES 180° APART
 - b. W = THREE HOLES 120° APART
19. THIS PART STANDARD TAKES PRECEDENCE IN CASES OF CONFLICT.

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID
REINFORCED, HEAVY-DUTY, 275 °F, 3000 psi FLARELESS,
TITANIUM FITTINGS, INCLUDING JUMP SIZE, STRAIGHT TO STRAIGHT

AS4624

SHEET 4 OF 5

REV.

A