

REV.  
B

SAE AS4676

FEDERAL SUPPLY CLASS  
4730

RATIONALE

CANCELED MILITARY STANDARD NUMBERS HAVE BEEN REPLACED. PRI-QPL NOTE HAS BEEN UPDATED AND CADMIUM WARNING NOTICE ADDED. OTHER UPDATES.


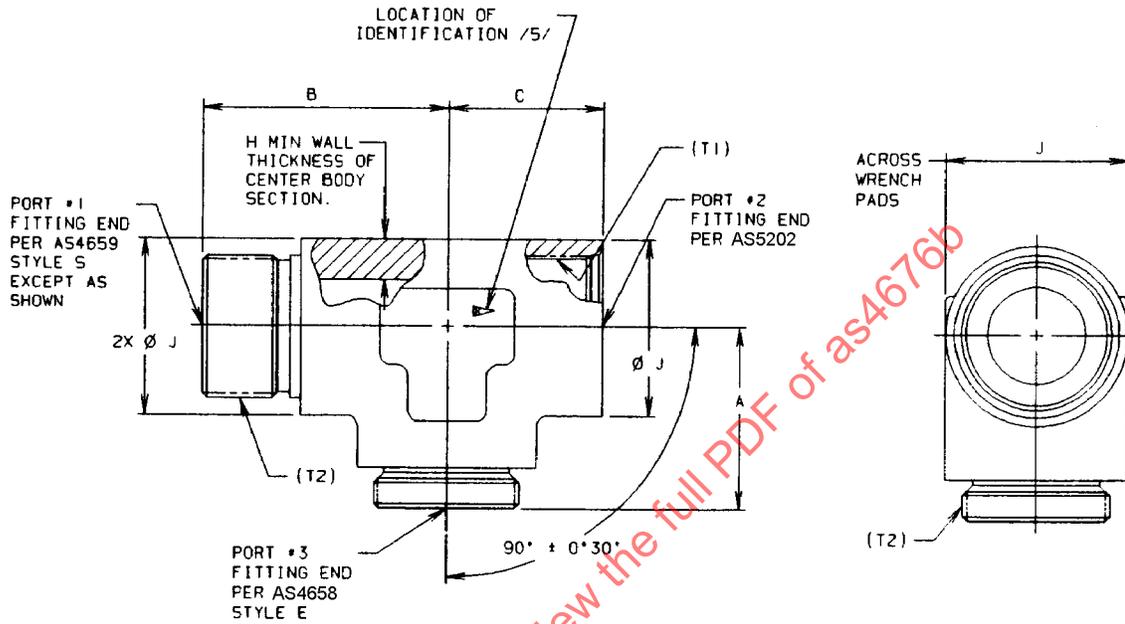


FIGURE 1 - FITTING, TEE

SAENORM.COM : Click to view the full PDF of as4676b

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS4676B>

THIRD ANGLE PROJECTION

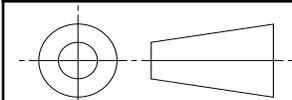

CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS18280

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

(R) FITTING, TEE, BULKHEAD AND BOSS ON RUN,  
SHORT FLARELESS

**SAE AS4676**  
SHEET 1 OF 3

**REV. B**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1992-07 REAFFIRMED 2004-07 REVISED 2013-01

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS4676 /15/ SIZE CODE	(NOMINAL TUBE SIZE)	T1 THREAD PER AS8879 CLASS 3B	T2 THREAD PER AS8879 CLASS 3A	A	B	C	H	J +.005/ -.020	LB/EA APPROX REF ALUM	LB/EA APPROX REF CRES	LB/EA APPROX REF TI
20	1.250	1.6250-12UNJ	1.5625-12UNJ	1.783	2.608	1.742	.122	2.000	1.153	3.197	1.827
24	1.500	1.8750-12UNJ	1.8125-12UNJ	1.970	2.795	1.930	.154	2.250	1.501	4.163	2.379

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

1/ MATERIAL:

- a. CODE LETTER T: TYPE 6AL-4V TITANIUM ALLOY FORGING OR BAR PER AMS4928
- b. CODE LETTER V: TYPE 15-5PH CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5659
- c. CODE LETTER W: TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS4141 OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER T: NONE
- b. MATERIAL CODE LETTER V: HEAT TREAT TO CONDITION H-1075 PER AMS2759/3
- c. MATERIAL CODE LETTER W: NONE

3/ FINISH:

- a. MATERIAL CODE LETTER T - FLUORIDE PHOSPHATE CONVERSION COAT PER AMS2486
- b. MATERIAL CODE LETTER V:
  - (1) V CODE PARTS TO BE PASSIVATED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: PASSIVATE PER AMS2700 TYPE 2 OR 8.
  - (2) V CODE PARTS TO BE CADMIUM PLATED ONLY WILL HAVE THE FINISH CODE LETTER "P" AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.
- c. MATERIAL CODE LETTER W: ANODIZE PER AMS2472 OR PER MIL-A-8625, TYPE II, CLASS 2 DYED BROWN SIMILAR TO COLOR 10080 OF FED-STD-595

4/ PROCUREMENT SPECIFICATION: AS18280 UNLESS SPECIFIED OTHERWISE ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST (QPL) PRI-QPL-AS18280 FOR THIS STANDARD. SEE <http://www.eAuditNet.com> FOR CURRENT QPL ONLINE.

5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D OR METHOD 7A3, 15A3, OR 15B. MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE, BASIC PART NUMBER, AND MATERIAL CODE LETTER.

6. THIS PART IS DESIGNED FOR USE IN SYSTEMS WITH OPERATING PRESSURES AS FOLLOWS:

- a. SIZES -20 AND -24 TITANIUM ALLOY AND CORROSION RESISTANT STEEL AT 3000 PSI
- B. SIZES -20 AND -24 ALUMINUM ALLOY AT 600 PSI

NOTE: THIS IS A NON-REDUCER FITTING.

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS4676</b> SHEET 2 OF 3	<b>REV.</b> <b>B</b>
	(R) FITTING, TEE, BULKHEAD AND BOSS ON RUN, SHORT FLARELESS		