

REV.
A

AS4680


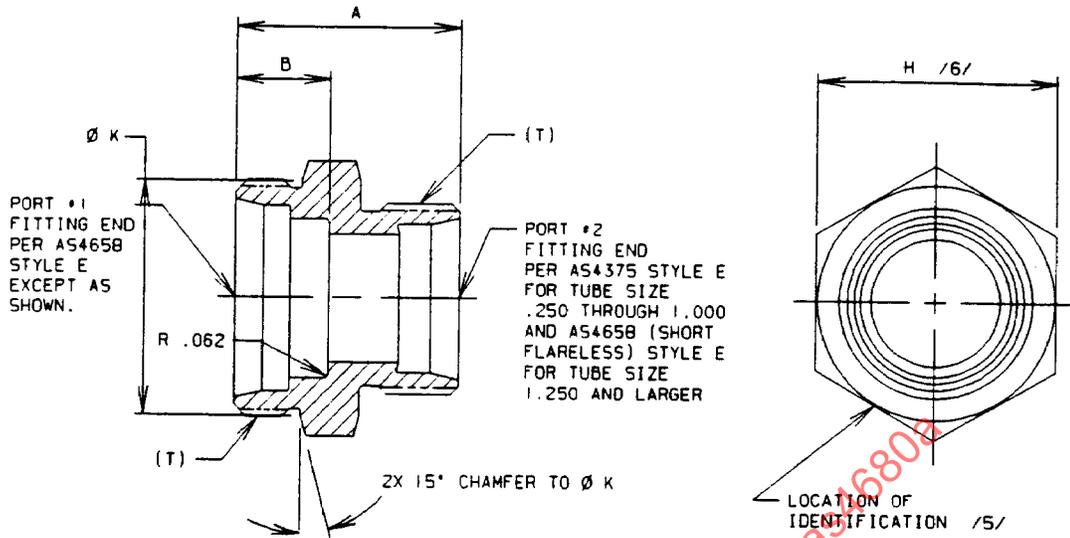


FIGURE 1 - FITTING, UNION, REDUCER

TABLE 1 - DIMENSIONS

PORT #1 SIZE /6/	A PORT #2 SIZE 04	A PORT #2 SIZE 06	A PORT #2 SIZE 08	A PORT #2 SIZE 10	A PORT #2 SIZE 12	A PORT #2 SIZE 16	A PORT #2 SIZE 20	A PORT #2 SIZE 24
20	1.291	1.307	1.400	1.463	1.526	1.526	--	--
24	--	--	--	--	1.589	1.589	1.301	--
28	--	--	--	--	--	1.589	1.364	1.364

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-18280

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, UNION, REDUCER, SHORT FLARELESS AND FLARELESS TO BOSS

AS4680
SHEET 1 OF 3

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS4680

TABLE 2 - PORT SIZES, CORRESPONDING THREADS, HEX SIZES AND HOLE DEPTH

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879			
			B	H	K
02	.125	.3125-24UNJF	--	--	--
03	.188	.3750-24UNJF	--	--	--
04	.250	.4375-20UNJF	--	--	--
05	.312	.5000-20UNJF	--	--	--
06	.375	.5625-18UNJF	--	--	--
08	.500	.7500-16UNJF	--	--	--
10	.625	.8750-14UNJF	--	--	--
12	.750	1.0625-12UNJ	--	--	--
14	.875	1.1875-12UNJ	--	--	--
16	1.000	1.3125-12UNJ	--	--	--
20	1.250	1.5625-12UNJ	.650	1.615-1.630	1.605
24	1.500	1.8125-12UNJ	.682	1.865-1.880	1.855
28	1.750	2.1250-12UNJ	.682	2.240-2.260	2.230

NOTES:

/1/ MATERIAL:

- a. CODE LETTER T: TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS 4928
- b. CODE LETTER V: TYPE 15-5PH CORROSION RESISTANT STEEL BAR PER AMS 5659
- c. CODE LETTER W: TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER T: NONE
- b. MATERIAL CODE LETTER V: HEAT TREAT TO CONDITION H-1075 PER AMS 2759/3
- c. MATERIAL CODE LETTER W: NONE

/3/ FINISH:

- a. MATERIAL CODE LETTER T - FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486
- b. MATERIAL CODE LETTER V:
 - (1) V CODE PARTS TO BE PASSIVATED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: PASSIVATE PER QQ-P-35, TYPE II OR VIII.
 - (2) V CODE PARTS TO BE CADMIUM PLATED ONLY WILL HAVE THE FINISH CODE LETTER "P" AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2.
- c. MATERIAL CODE LETTER W: ANODIZE PER AMS 2472 OR PER MIL-A-8625, TYPE II, CLASS 2 DYED BROWN SIMILAR TO COLOR 10080 OF FED-STD-595

/4/ PROCUREMENT SPECIFICATION: MIL-F-18280 EXCEPT AS SPECIFIED ON THIS STANDARD. THIS PART SHALL BE QUALIFIED TO THE PROCUREMENT SPECIFICATION AS APPLICABLE IN A COMPLETE ASSEMBLY. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D OR METHOD 7A3, 15A3, OR 15B. MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE, BASIC PART NUMBER, AND MATERIAL CODE LETTER.