

REV.  
A

AS4798

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

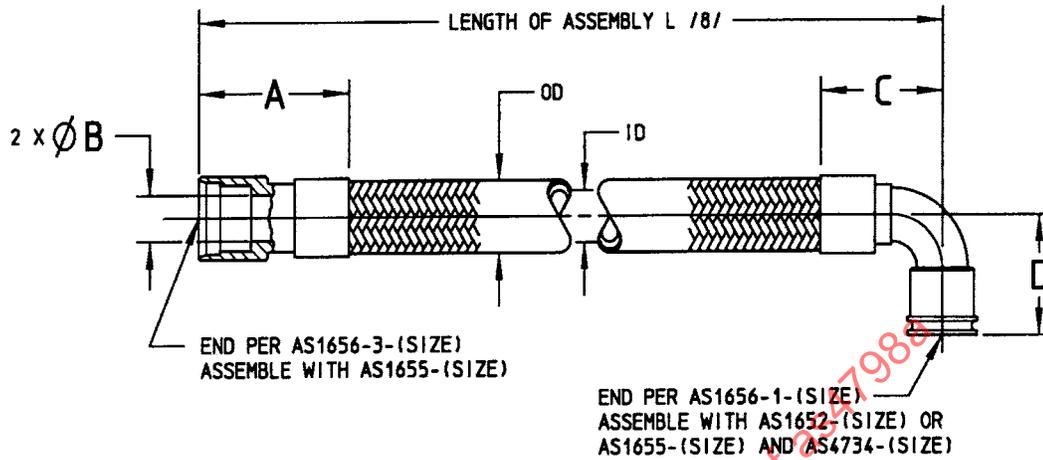


FIGURE 1 - HOSE ASSEMBLY


TABLE 1 - BASIC HOSE AND END FITTING DIMENSIONS

| BASIC NO. AND SIZE CODE | HOSE SIZE (REF) | A MAX | B MIN | C MAX | D MIN | D MAX | ID (REF) | OD MIN | OD MAX |
|-------------------------|-----------------|-------|-------|-------|-------|-------|----------|--------|--------|
| AS4798-08               | .500            | 1.60  | .425  | 1.39  | 1.095 | 1.200 | .500     | .65    | .73    |
| AS4798-10               | .625            | 1.60  | .550  | 1.57  | 1.244 | 1.337 | .625     | .81    | .85    |
| AS4798-12               | .750            | 1.84  | .654  | 2.05  | 1.540 | 1.677 | .750     | .94    | .98    |
| AS4798-16               | 1.000           | 1.92  | .909  | 2.17  | 1.710 | 1.847 | 1.000    | 1.19   | 1.23   |

TABLE 2 - LENGTH TOLERANCE

| HOSE ASSEMBLY LENGTH   | PREFERRED INCREMENTS  | TOLERANCE    |
|------------------------|-----------------------|--------------|
| UNDER 18 in            | (NOT LESS THAN) .125  | +.125/- .125 |
| 18 TO 36 in EXCLUSIVE  | (NOT LESS THAN) .250  | +.250/- .250 |
| 36 TO 100 in EXCLUSIVE | (NOT LESS THAN) .500  | +.375/- .375 |
| 100 in AND OVER        | (NOT LESS THAN) 1.000 | +.5%/- .500  |

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS4468 /2/

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**  
(R) HOSE ASSEMBLY, LINED SILICONE,  
125 PSI, FIXED CAVITY COUPLING, POTABLE WATER,  
STRAIGHT FEMALE TO 90° MALE

**AS4798**  
SHEET 1 OF 3

**REV. A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1993-06 REVISED 2001-08 REAFFIRMED 2007-01

TABLE 3 - HOSE ASSEMBLY WEIGHT INFORMATION

| HOSE SIZE<br>CODE | HOSE<br>lb/in<br>NOM (REF) | END FITTING                    | END FITTING               | HOSE LENGTH                                 | HOSE LENGTH                            |
|-------------------|----------------------------|--------------------------------|---------------------------|---|--|
|                   |                            | lb/EA<br>STRAIGHT<br>NOM (REF) | lb/EA<br>90°<br>NOM (REF) | CORRECTION<br>FACTOR,<br>in /9/<br>STRAIGHT | CORRECTION<br>FACTOR,<br>in /9/<br>45° |
| 08                | .0081                      | .055                           | .058                      | .98   | .77                                    |
| 10                | .0111                      | .067                           | .080                      | .98   | .95                                    |
| 12                | .0137                      | .110                           | .134                      | 1.06  | 1.26                                   |
| 16                | .0182                      | .146                           | .189                      | 1.14  | 1.39                                   |

## NOTES:

1. MATERIAL AND FINISH: PER AS4468, TABLE 1. ALL FITTING COMPONENTS 300 SERIES CORROSION RESISTANT STEEL, PASSIVATED.
- 2/ THIS PRODUCT SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS4468. USERS OF THIS STANDARD SHALL PROCURE THIS PRODUCT FROM ACCREDITED MANUFACTURER(S) OR THEIR ACCREDITED DISTRIBUTOR(S) AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST (QPL) QPL-AS4468 FOR THIS STANDARD. AS4468 IS BEING REVISED TO SPECIFY PRI-QPL TO REPLACE USER-QPL. CHANGE OVER FROM USER-QPL TO PRI-QPL SHALL BE COMPLETED WITHIN 18 MONTHS AFTER RELEASE OF THIS STANDARD.
3. INTENDED USE: THESE HOSE ASSEMBLIES ARE INTENDED FOR USE IN POTABLE WATER SYSTEM INSTALLATIONS WHERE A HIGH DEGREE OF FLEXIBILITY IS REQUIRED.
4. IDENTIFICATION: PER AS4468.
5. OPERATING CHARACTERISTICS:
  - a. OPERATING TEMPERATURE: -65 TO +160 °F (-54 TO +71 °C).
  - b. OPERATING PRESSURE: 125 psi MAX
6. FUNCTIONAL TEST AND CLEANING: PER AS4468.
7. CONSTRUCTION: PER AS4468.
- 8/ LENGTH "L" IS A FOUR-DIGIT NUMBER OF WHICH THE FIRST THREE DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE FOURTH DIGIT THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM "GAGE POINT" TO "GAGE POINT". SEE TABLE 2 FOR LENGTH TOLERANCES.
- 9/ HOSE WEIGHT PLUS EACH END FITTING WEIGHT EQUALS HOSE ASSEMBLY WEIGHT. FOR DETERMINING HOSE WEIGHT, DEDUCT APPROPRIATE LENGTH CORRECTION FACTOR FROM EACH END OF THE ASSEMBLY LENGTH.
10. DIMENSIONING AND TOLERANCING: ASME Y14.5M-1994.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS  $\pm .010$ , ANGULAR DIMENSIONS  $\pm 2^\circ$ .