

REV.
A

AS4807

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS STANDARD HAS BEEN REVISED TO CORRECT THE AS-FORGED LEG DIMENSION TO ALLOW STANDARD TOLERANCE FORGINGS TO BE USED AND STILL MEET THE SPECIFICATION.


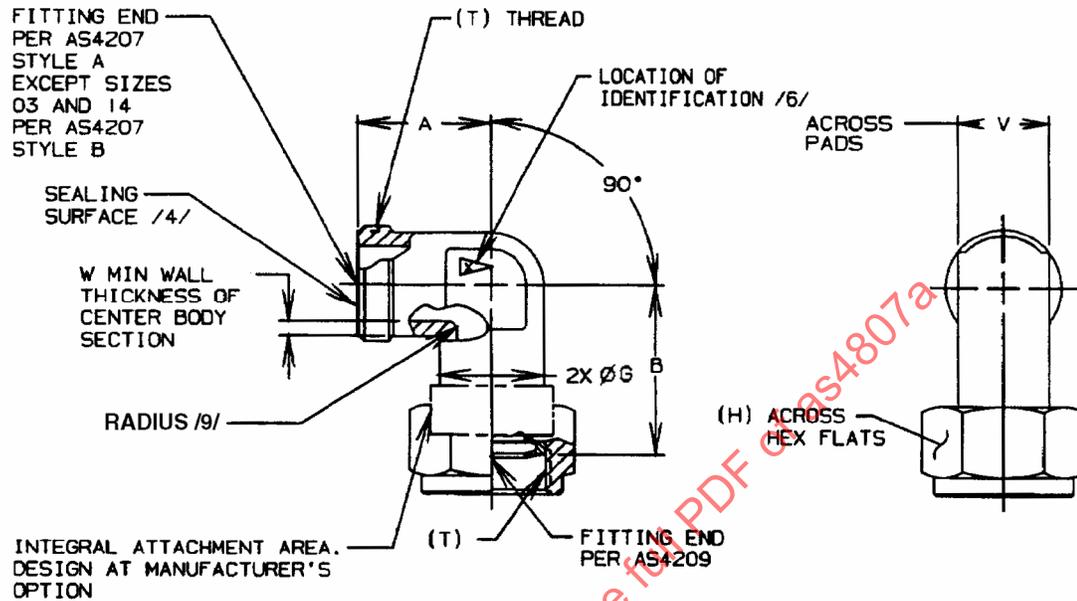


FIGURE 1 - FITTING ASSEMBLY, ELBOW, 90°

TABLE 1 - DIMENSIONS AND WEIGHTS

| BASIC NO. AS4807 /16/ SIZE CODE | (NOMINAL TUBE SIZE) | T THREAD PER AS8879 CLASSES A AND B | A | B | G MIN | H | V | W | LB/EA MAX CRES | LB/EA MAX TI |
|--|---------------------------|---|-------|-------|----------|-------|-------------|------|----------------------|--------------------|
| 03 | .188 | .3750-28 UNJS | .575 | .781 | .330 | .500 | .360- .377 | .055 | .0480 | .0274 |
| 04 | .250 | .4375-24 UNJS | .617 | .808 | .374 | .562 | .360- .377 | .060 | .0554 | .0317 |
| 05 | .312 | .5000-24 UNJS | .653 | .850 | .436 | .625 | .423- .440 | .060 | .0716 | .0409 |
| 06 | .375 | .5625-20 UNJS | .704 | .945 | .499 | .688 | .485- .502 | .060 | .0894 | .0511 |
| 08 | .500 | .7188-20 UNJS | .824 | 1.045 | .650 | .875 | .547- .565 | .065 | .129 | .0738 |
| 10 | .625 | .8438-18 UNJS | .955 | 1.178 | .748 | 1.000 | .673- .681 | .070 | .183 | .105 |
| 12 | .750 | 1.0000-16 UNJ | 1.062 | 1.316 | .955 | 1.125 | .860- .878 | .095 | .271 | .155 |
| 14 | .875 | 1.1250-16 UNJ | 1.216 | 1.514 | 1.210 | 1.375 | 1.110-1.128 | .105 | .541 | .309 |
| 16 | 1.000 | 1.2500-14 UNJS | 1.246 | 1.529 | 1.210 | 1.500 | 1.110-1.128 | .115 | .509 | .291 |
| 20 | 1.250 | 1.5781-14 UNJS | 1.387 | 1.847 | 1.480 | 1.875 | 1.355-1.380 | .110 | .788 | .450 |
| 24 | 1.500 | 1.8438-14 UNJS | 1.688 | 2.171 | 1.740 | 2.125 | 1.605-1.630 | .130 | 1.20 | .683 |

THIRD ANGLE PROJECTION

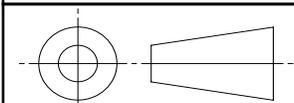

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /5/ AS85421, AS85720

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) FITTING ASSEMBLY, ELBOW, 90°,
BEAM SEAL, RETAINED NUT

AS4807
SHEET 1 OF 3

**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

REVISED 2006-06

REAFFIRMED 2001-12

ISSUED 1996-05

NOTES:

/1/ MATERIAL:

a. CODE LETTER T

(1) BODY: TYPE 6AL-4V TITANIUM ALLOY FORGING OR BAR PER AMS 4965.

(2) NUT: TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS 4965.

b. CODE LETTER P

(1) BODY: TYPE 17-4PH CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5643.

(2) NUT: TYPE 17-4PH CORROSION RESISTANT STEEL BAR PER AMS 5643.

c. CODE LETTER V

(1) BODY: TYPE 15-5PH CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5659.

(2) NUT: TYPE 15-5PH CORROSION RESISTANT STEEL BAR PER AMS 5659.

2. HEAT TREAT:

a. MATERIAL CODE LETTER T

(1) BODY AND NUT: NONE.

b. MATERIAL CODE LETTERS P AND V

(1) BODY AND NUT: HEAT TREAT TO CONDITION H 1075 PER AMS 2759/3.

3. FINISH:

a. MATERIAL CODE LETTER T

(1) BODY: NONE.

(2) NUT: NONE.

b. MATERIAL CODE LETTERS P AND V

(1) BODY: PASSIVATE PER AMS 2700.

(2) NUT: PASSIVATE PER AMS 2700.

/4/ DRY FILM LUBRICANT: APPLY DRY FILM LUBRICANT PER AS5272, TYPE I TO THE SEALING SURFACE. OVERSPRAY IN BORE IS NOT PERMITTED. APPLY DRY FILM LUBRICANT PER AS5272, TYPE I TO THE INSIDE OF THE NUT. MINOR OVERSPRAY IS PERMITTED ON THE NUT.

/5/ PROCUREMENT SPECIFICATION: AS85421 FOR OPERATING PRESSURES TO 4000 PSI AND AS85720 FOR OPERATING PRESSURES TO 5000 PSI, EXCEPT AS SPECIFIED ON THIS STANDARD. THIS PART SHALL BE QUALIFIED TO THE PROCUREMENT SPECIFICATION AS APPLICABLE IN A COMPLETE ASSEMBLY. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.