

AEROSPACE STANDARD

SAE AS50151

Issued 2004-06

Connectors, Electrical, Circular Threaded, AN Type,
General Specification For

FSC 5935

NOTICE

This document has been taken directly from U.S. Military specification MIL-DTL-5015H, Supplement 1 and contains only minor editorial and format changes required to bring it into conformance with the publishing requirements of SAE Technical Standards. The initial release of this document is intended to replace MIL-DTL-5015H, Supplement 1. Any part numbers established by the original specification remain unchanged.

The original military specification was adopted as an SAE standard under the provisions of the SAE Technical Standards Board (TSB) Rules and Regulations (TSB 001) pertaining to accelerated adoption of government specifications and standards. TSB rules provide for (a) the publication of portions of unrevised government specifications and standards without consensus voting at the SAE committee level, and (b) the use of the existing government specification or standard format.

Under Department of Defense policies and procedures, any qualification requirements and associated qualified products lists are mandatory for DoD contracts. Any requirement relating to qualified products lists (QPL's) has not been adopted by SAE and is not part of this technical report.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)

Tel: 724-776-4970 (outside USA)

Fax: 724-776-0790

Email: custsvc@sae.org

SAE WEB ADDRESS:

<http://www.sae.org>

SAE AS50151

1. SCOPE:

1.1 Scope:

This specification covers circular threaded electrical connectors with solder or removable crimp contacts (both front and rear release). These connectors are for use in electronic, electrical power, and control circuits (see 6.1).

1.2 Classification:

Electrical connectors covered by this specification are divided into the following classes, series, and receptacle styles.

1.2.1 Classes:

The classes of electrical connectors are as follows:

- Class A – Solid shell solder contact connectors
- Class B – Split shell solder contact connectors
- Class C – Solder contact connectors for use with pressurized equipment
- Class D – Crimp and solder contact connectors for use in high-impact shock conditions
- Class DJ – Crimp contact connectors with backshell connector assembly for use in high impact shock conditions
- Class E – Environment resistant solder contact connectors
- Class F – Environment resistant solder contact connectors, with clamp
- Class H – Hermetic solder contact connectors
- Class K – Crimp and solder firewall connectors
- Class L – Fluid resistant crimp contact connectors
- Class P – Environment resistant potted solder contact connectors
- Class R – Crimp and solder contact connector with grommet seal without clamp
- Class U – Fluid resistant crimp contact connectors
- Class W – General purpose crimp contact connectors

SAE AS50151

1.2.2 Series:

The series of electrical connectors are as follows:

- Series I – Solder contact connectors
- Series II – Front release, crimp contact connectors
- Series III – Rear release, crimp contact connectors
- Series IV – Connector accessories

1.2.3 Receptacle styles:

The receptacle styles of electrical connectors are as follows:

Flange (box or wall)

Jam nut

Cable connecting

Solder mounting

2. APPLICABLE DOCUMENTS:

2.1 General:

The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents:

2.2.1 Specifications and standards:

The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SAE AS50151

2.2.1 (Continued):

SPECIFICATIONS

FEDERAL

- L-P-410 – Plastic, Polyamide (Nylon), Rigid, Rods, Tubes, Flats, Molded and Cast Parts.
- QQ-S-365 – Silver Plating, Electrodeposited, General Requirements for.
- QQ-P-416 – Plating, Cadmium (Electrodeposited).

DEPARTMENT OF DEFENSE

- MIL-S-901 – Shock Tests H.I. (High-Impact) Shipboard Machinery, Equipment, and Systems, Requirements for.
- MIL-C-915 – Cable and Cord, Electrical, for Shipboard Use, General Specification for.
- MIL-H-5606 – Hydraulic Fluid, Petroleum Base; Aircraft, Missile, and Ordnance. (Inactive for new design)
- MIL-S-7742 – Screw Threads, Standard, Optimum Selected Series: General Specification for. (Inactive for new design)
- MIL-PRF-7808 – Lubricating Oil, Aircraft Turbine Engine, Synthetic Base.
- MIL-PRF-8516 – Sealing Compound, Synthetic Rubber, Electric Connectors and Electric Systems, Chemically Cured.
- MIL-W-16878 – Wire, Electrical, Insulated, General Specification for.
- MIL-DTL-22520 – Crimping Tools, Terminal, General Specification for.
- MIL-W-22759 – Wire, Electrical, Fluoropolymer-Insulated, Copper or Copper Alloy.
- MIL-PRF-23586 – Sealing Compound (With Accelerator), Silicone Rubber, Electrical.
- MIL-W-25038 – Wire, Electrical, High Temperature, Fire Resistant, and Flight Critical, General Specification for.
- MIL-C-39029 – Contacts, Electrical Connector, General Specification for.

SAE AS50151

2.2.1 (Continued):

- MIL-C-39029/29 – Contacts, Electrical Connector, Pin, Crimp Removable, (For MIL-C-5015 Series MS3450 and MIL-C-83723 Series II Connectors).
 - MIL-C-39029/30 – Contacts, Electrical Connector, Socket, Crimp Removable, (For MIL-C-5015 MS3450 Series and MIL-C-83723 Series II Connectors).
 - MIL-C-39029/44 – Contact, Electrical Connector, Pin, Crimp Removable (For MIL-C-5015 Series MS3400 Connectors).
 - MIL-C-39029/45 – Contacts, Electrical Connector, Socket, Crimp Removable, (For MIL-C-5015 Series MS3400 Connectors).
 - MIL-DTL-81381 – Wire, Electric, Polyamide-Insulated, Copper or Copper Alloy.
 - MIL-I-81969/14 – Installing and Removal Tools, Connector, Electrical Contact, Type III, Class 2, Composition B.
 - MIL-I-81969/15 – Installing and Removal Tools, Connector, Electrical Contact, Type II, Class 2, Composition A.
 - MIL-I-81969/17 – Installing and Removal Tools, Connectors, Electrical Contact, Type I, Class 1, Composition C.
 - MIL-I-81969/19 – Installing and Removal Tools, Connector, Electrical Contact, Type II, Class 1, Composition C.
 - MIL-C-85049 – Connector Accessories, Electrical, General Specification for.
 - MIL-C-85049/11 – Connector Accessories, Electrical, Backshell, Environmental, Cable Sealing, Straight Category 1A (For MIL-C-5015 Crimp, MIL-C-26482 Series 2, MIL-C-81703 Series 3, and MIL-C-83723 Series III Connectors).
 - MIL-C-85049/52 – Connector Accessories, Electrical, Strain Relief, Self-Locking and Non-Self-Locking, Straight, Category 4B (For MIL-C-5015 Crimp, MIL-C-26482 Series 2, MIL-C-81703 Series 3, and MIL-C-83723 Series III Connectors).
- Connectors, solder contact
- MS3100 – Connector, Receptacle, Electric Wall Mounting, Solder Contacts, AN Type. (Inactive for new design)

SAE AS50151

2.2.1 (Continued):

- MS3101 – Connector, Plug, Electric, Cable Connecting, Solder Contacts, AN Type. (Inactive for new design)
 - MS3102 – Connector, Receptacle, Electric, Box Mounting, Solder Contacts, AN Type. (Inactive for new design)
 - MS3103 – Connector, Receptacle, Electric, Potting Seal, Solder Contacts, AN Type. (Inactive for new design)
 - MS3106 – Connector, Plug, Electrical, Straight, Solder Contacts, AN Type. (Inactive for new design)
 - MS3107 – Connector, Plug Electric, Quick Disconnect. (Inactive for new design)
 - MS3108 – Connectors, Plug, Electric, Solder Contact, 90 Degree, AN Type. (Inactive for new design)
 - MS3142 – Connector, Receptacle, Electrical, Box Mounting, Solder Contact, Hermetic, AN Type. (Inactive for new design)
 - MS3436 – Connector, Plug, Electric, Solder Contact, Utility. (Inactive for new design)
 - MS3441 – Connector, Plug, Electric, Utility. (Inactive for new design)
 - MS3507 – Connector, Plug, Electric, Solder Contact, Quick Disconnect, Utility.
 - MS25183 – Connector, Plug Electric, Potting Seal, Solder Contacts, AN Type. (Inactive for new design)
- Connectors, crimp contact, front release
- MS3400 – Connectors, Receptacle, Electric, Wall Mounting, Front Release, Crimp Contact, AN Type. (Inactive for new design)
 - MS3401 – Connectors, Receptacle, Electric, Cable Connecting, Front Release, Crimp Contact, AN Type. (Inactive for new design)
 - MS3402 – Connector, Receptacle, Electric, Box Mounting, Front Release, Crimp Contact, AN Type with. (Inactive for new design)

SAE AS50151

2.2.1 (Continued):

- MS3404 – Connectors, Receptacle, Electric, Jam Nut Mounting, Front Release, Crimp Contact, AN Type. (Inactive for new design)
 - MS3406 – Connectors, Plug, Electric, Front Release, Crimp Contact AN Type. (Inactive for new design)
 - MS3408 – Connector, Plug, Electric, 90 Degree Assembly, Crimp Contact, AN Type.
 - MS3409 – Connectors, Plug, Electric, 45 Degrees Assembly, Crimp Contact, AN Type.
 - MS3412 – Connectors, Receptacle, Electric, Wall Mounting, Front Release, Crimp Contact, AN Type-With Accessory Threads.
- Connectors, crimp contact, rear release
- MS3450 – Connector, Receptacle, Electric, Wall Mounting, Rear Release, Crimp Contact, AN Type.
 - MS3451 – Connector, Receptacle, Electrical, Cable Connecting, Rear Release, Crimp Contact, AN Type. (Inactive for new design)
 - MS3452 – Connector, Receptacle, Electric, Box Mounting, Rear Release, Crimp Contact, AN Type with.
 - MS3454 – Connectors, Receptacle, Electrical, Jam Nut Mounting, Rear Release, Crimp Contact, AN Type.
 - MS3456 – Connectors, Plug, Electrical, Rear Release, Crimp Contact, AN Type.
- Connector accessories
- MS3105 – Connector, Receptacle, Electric Dummy Stowage. (Inactive for new design)
 - MS3187 – Plug, End Seal, For MIL-C-26482, MIL-C-5015, MIL-C-81703, and MIL-C-83723 Electrical Connectors (Inactive for New Design)
 - MS3188 – Backshell, 90 Degrees, Cable Sealing and Termination Connector, Electric. (Inactive for new design)
 - MS25042 – Cover, Electrical Connector; Plug, AN Type.

SAE AS50151

2.2.1 (Continued):

MS25043 – Cover, Electrical Connector, Receptacle, AN Type.

MS27488 – Plug, End Seal, Electrical Connector.

The following documents provide information required for the fabrication of products in accordance with MIL-DTL-5015H.

AN3111 – Ring-Bonding, Electrical Connector. (Inactive for new design)

MS3155 – Connector, Electric, Rear Accessory Design Standard. (Inactive for new design)

MS3420 – Adapter, Cable Clamp to Cable, Bushing, Telescoping. (Inactive for new design)

MS3480 – Tool, Connector Assembly, For MIL-C-5015 Connectors.

MS28900 – Packing, Preformed, For Electrical Use. (Inactive for new design)

MS33678 – Connector, Receptacle, Electric, Integral Mounting.

MS33695 – Contacts, Video Coaxial Connector.

MS90376 – Cap, Dust, Plastic, Electric Connector.

STANDARDS

FEDERAL

FED-STD-H28 – Screw-Thread Standards for Federal Services.

DEPARTMENT OF DEFENSE

MIL-STD-167-1 – Mechanical Vibrations of Shipboard Equipment (Type I-Environmental and Type II-Internally Excited).

MIL-STD-1285 – Marking of Electrical and Electronic Parts.

MIL-STD-1344 – Test Methods for Electrical Connectors.

MIL-STD-1651 – Insert Arrangements for MIL-C-5015, MIL-C-22992 (Classes C, J, and R), and MIL-C-83723 (Series II) Electrical Connectors.

SAE AS50151

2.2.1 (Continued):

(Unless otherwise indicated, copies of the above specifications and standards are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications:

The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of the documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE

ANSI-Z540.1 – Laboratories, Calibration, and Measuring and Test Equipment. (DoD adopted)

(Application for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-B85 – Aluminum-Alloy Die Castings. (DoD adopted)

ASTM-A342 – Materials, Feebly Magnetic, Permeability of. (DoD adopted)

ASTM-B488 – Gold for Engineering Uses, Electrodeposited Coatings of. (DoD adopted)

ASTM-A582 – Free-Machining Stainless and Heat Resisting Steel Bars. (DoD adopted)

ASTM-B733 – Metals, Autocatalytic Electroless Nickel-Phosphorus Coating On. (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

SAE AS50151

2.3 (Continued):

THE INSTITUTE FOR INTERCONNECTING AND PACKING ELECTRONIC CIRCUITS

- J-STD-001 – Requirements for Soldered Electrical and Electronic Assemblies
- J-STD-006 – Electronic Grade Solder Alloys and Fluxed and Non-Fluxed Solid Solders for Electronic Soldering Applications Requirements For.

(Applications for copies should be addressed to the Institute for Interconnecting and Packaging Electronic Circuits (IPC, Inc), 2215 Sanders Road, Suite 200 South, Northbrook, IL 60062-6126.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

- SAE-AIR1351 – Aerospace Electrical and Electronic Wiring Devices and Accessories, Manufacturers' Identification of (DoD adopted)
- SAE-AMS-QQ-S-763 – Steel Bars, Wire, Shapes, and Forgings; Corrosion Resistant. (DoD adopted).
- SAE-AS31091 – Boots, Heat-Shrinkable, Strain-Relief Straight. (DoD adopted)
- SAE-AS31971 – Pin, Gage for Socket Contact Engagement Test. (DoD adopted)
- SAE-AS34021 – Connector, Receptacle, Electric, Box Mounting, Front Release, Crimp Contact, AN Type with. (DoD adopted)
- SAE-AS34121 – Connectors, Receptacle, Electric, Wall Mounting, Front Release, Crimp Contact, AN Type-with Accessory Threads. (DoD adopted)
- SAE-AS34591 – Connectors, Plug, Electrical, Self-Locking, Coupling Nut, Rear Release, Crimp Contact, AN Type. (DoD adopted)

(Applications for copies should be addressed to Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence:

In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications, or MS sheets), the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

SAE AS50151

3. REQUIREMENTS:

3.1 MS sheets:

The individual item requirements shall be as specified herein and in accordance with the applicable MS sheets. In the event of any conflict between the requirements of this specification and the MS sheets, the latter shall govern.

3.2 Qualification:

The connectors furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.3 and 6.14).

3.3 Materials:

3.3.1 Dissimilar metals:

When dissimilar metals are employed in contact with each other in a connector or in a mated pair of connectors, protection against galvanic corrosion shall be provided (see 6.17).

3.3.2 Nonmagnetic materials (except class H and K connectors):

All parts shall be made of materials which are classed as nonmagnetic except for classes H and K connectors (see 1.2 and 3.6).

3.3.3 Contacts:

3.3.3.1 Contact materials:

Contacts shall be made of conductive materials. Thermocouple contacts shall be made of a material compatible with the thermocouple wire to which attachment is intended (see 6.16).

3.3.3.2 Contact plating:

3.3.3.2.1 Contact plating (solder type, except class H):

Contacts shall be silver plated in accordance with QQ-S-365 or gold plated in accordance with ASTM-B488 over silver plating in accordance with QQ-S-365. The resultant minimum thickness of contact plating shall be 100 microinches. Accessory members of the socket contacts need not be plated but shall meet the requirements for dissimilar metals specified in 3.3.1.

SAE AS50151

3.3.3.2.2 Contact plating (class H connectors):

Contacts shall be gold plated to a thickness of not less than 50 microinches in accordance with ASTM-B488, type 3, code C, over an underplate approved by the qualifying activity (see 6.14). A silver underplate shall not be used.

3.3.3.2.3 Contact plating (thermocouple):

Thermocouple contacts shall be cadmium plated in accordance with QQ-P-416, or otherwise protected from corrosion. Accessory members of the socket contacts need not be plated, but shall meet the requirements for dissimilar metals (see 3.3.1).

3.3.4 Dielectric materials:

3.3.4.1 Insert and grommet:

Insert and grommet materials shall be dielectric having hardness, electrical, and mechanical characteristics capable of meeting the requirements of this specification.

3.3.4.1.1 Connectors (except solder contact class A, B, C, H, K, and P):

The mating faces of pin inserts of solder contact connectors shall be a resilient material within a Shore A Durometer range of 60 to 85. On crimp contact front release connectors and rear release style P connectors the Shore A Durometer range shall be 35 to 85 with a thickness of not less than 0.090 inch.

3.3.4.1.2 Class H:

The hermetic sealing of class H connectors shall be accomplished by the use of vitreous material. The mating faces of pin inserts shall be resilient material within a Shore A Durometer range of 35 to 55.

3.3.5 Potting molds:

Potting molds shall be made of polyamide conforming to L-P-410. The molds shall incorporate a means for attachment to the connector and shall accept and bond to MIL-PRF-8516 or MIL-PRF-23586 potting material without treatment by the user.

3.3.6 Shells, coupling rings, and backshells:

- a. Connector shells and coupling rings, except for class D, H, and K, shall be made of aluminum alloys. Die castings, if used, shall conform to ASTM-B85, composition number GPASC84B.
- b. Class D shells and coupling rings shall be made of a heat treated wrought aluminum alloy meeting the requirements of this specification.

SAE AS50151

3.3.6 (Continued):

- c. Class H and K shells and coupling rings shall be made of ferrous alloy.
- d. Class H, K, L, and U shells and coupling rings shall be made of non-magnetic corrosion-resistant steel in accordance with SAE-AMS-QQ-S-763, 300 series, or ASTM-A582, type XM-1 or 303. Class D and DJ shells and coupling rings shall be made of non-magnetic corrosion resistant steel in accordance with SAE-AMS-QQ-S-763, series 316 class.
- e. Backshells shall be fabricated and finished with the same materials as the connectors.

3.3.6.1 Finish:

The resultant finish on all connectors shall be electrically conductive.

- a. The finish of class A, B, C, E, F, P, and R connectors with aluminum alloy shells, coupling rings, and external screws shall be cadmium plated in accordance with QQ-P-416, type II, class 3. A preliminary plating of another metal is permissible. The resultant finish on cadmium plate connectors shall be olive drab (light to dark). Stainless steel in accordance with SAE-AMS-QQ-S-763 is an acceptable alternative for external screws.
- b. The finish of class D connectors with wrought aluminum shells and coupling rings, class W connectors with aluminum alloy shells and coupling rings, and external screws for these classes shall be cadmium plated in accordance with QQ-P-416, type II, class 3 over nickel. The resultant finish on cadmium plated connectors shall be olive drab (light to dark). Stainless steel in accordance with SAE-AMS-QQ-S-763 is an acceptable alternative for external screws.
- c. The finish of class H connectors with ferrous alloy shells and coupling rings, series II and series III class K connectors with ferrous alloy shells and coupling rings, and external screws shall be electroless nickel in accordance with ASTM-B733, class 3 or 4. A preliminary plating of another metal is permissible. Stainless steel in accordance with SAE-AMS-QQ-S-763 is an acceptable alternative for external screws.
- d. The finish of series I class K connectors with ferrous alloy shells and coupling rings, series II and III class KT connectors with ferrous alloy shells and coupling rings, and external screws for these classes shall be cadmium plate in accordance with QQ-P-416, type II, class 3. The resultant finish on cadmium plated connectors shall be olive drab (light to dark). Stainless steel in accordance with SAE-AMS-QQ-S-763 is an acceptable alternate plating for external screws.

SAE AS50151

3.3.6.1 (Continued):

- e. The finish of class DS connectors with corrosion-resistant steel shells and coupling rings shall be cadmium plate in accordance with QQ-P-416, type II, class 3, color - black. All other classes of connectors with corrosion-resistant steel shells and coupling rings shall be passivated.
- f. The finish of class HT connectors with ferrous alloy shells and coupling rings, and external screws shall be electrically conductive fused tin. Stainless steel in accordance with SAE-AMS-QQ-S-763 is an acceptable alternate plating for external screws.
- g. The finish of class L and U connectors with aluminum alloy shells and coupling rings, and external screws shall be electroless nickel in accordance with ASTM-B733, class 3 or 4. Stainless steel in accordance with SAE-AMS-QQ-S-763 is an acceptable alternative for external screws.

3.4 Design and construction:

Connectors and accessories shall be designed and constructed to withstand handling incident to installation and maintenance in service. The connectors and accessories shall conform to the following:

Crimp contact connectors, black end configuration except MS3402, MS3412, MS3452, SAE-AS34021, and SAE-AS34121	figure 1
Connector, front release, series II interface dimensions	figures 2 and 3
Connector, rear release series III, and hermetic, interface dimensions	figure 4, 5, and 6
Connector solder contact (pin and socket) series I configuration	figure 7
Accessories to be used with series II and series III connectors	MIL-C-85049

SAE AS50151

3.4.1 Contacts:

Contacts shall conform to MIL-C-39029 except as otherwise required herein for solder contact connectors. Contacts shall be designed so that neither the pin nor socket contacts are damaged during mating of counterpart connectors. The quantity of crimp contacts required for the connector plus one spare contact for connector arrangements having 26 contacts or less and two spare contacts for arrangements over 26 contacts shall be included in the unit package. No spares shall be supplied with sizes 8, 4, and 0 contacts. For other than direct shipments to the Government, crimp contact connectors are permitted to be ordered without contacts (see 6.2).

3.4.1.1 Solder contacts:

Solder contacts shall conform to figure 7.

3.4.1.1.1 Mating end:

The entering end of socket contacts shall be rounded or chamfered to allow for misalignment of the entering pin. The socket contacts shall provide the spring action for maintaining the contacting pressure between the pin and the socket. Size 12 and 16 socket contacts shall be designed to exclude the entrance of a pin 0.005 inch larger than the allowable maximum diameter of a mating pin. Size 16 contacts shall pass the resistance probe damage test (see 4.6.22). Use of designs for solder type pin and socket contacts sizes 0, 4, and 8 which allow contacts to be readily removable from their inserts for soldering to their conductors is permitted.

3.4.1.1.2 Solder cups:

Solder cups shall be designed so that during soldering no components are damaged and no liquid solder escapes. The solder cups shall be as indicated on figure 7. The solder cups of sizes 0, 4, and 8 shall be provided with a venthole or with other provisions to prevent trapping of air during soldering. The interior surface of solder cups for sizes 16 and 12, except thermocouple contacts, shall be completely tinned over 100 percent of the full circle portion and for at least 50 percent of the remainder of the solder well area. For sizes 0, 4, and 8 the interiors shall be completely tinned with solder conforming to J-STD-006, composition Sn60 or better commercial grade. If flux is used, flux residues and contaminants shall be completely removed without effecting the components. No excess solder shall be on the exterior of the solder cup.

SAE AS50151

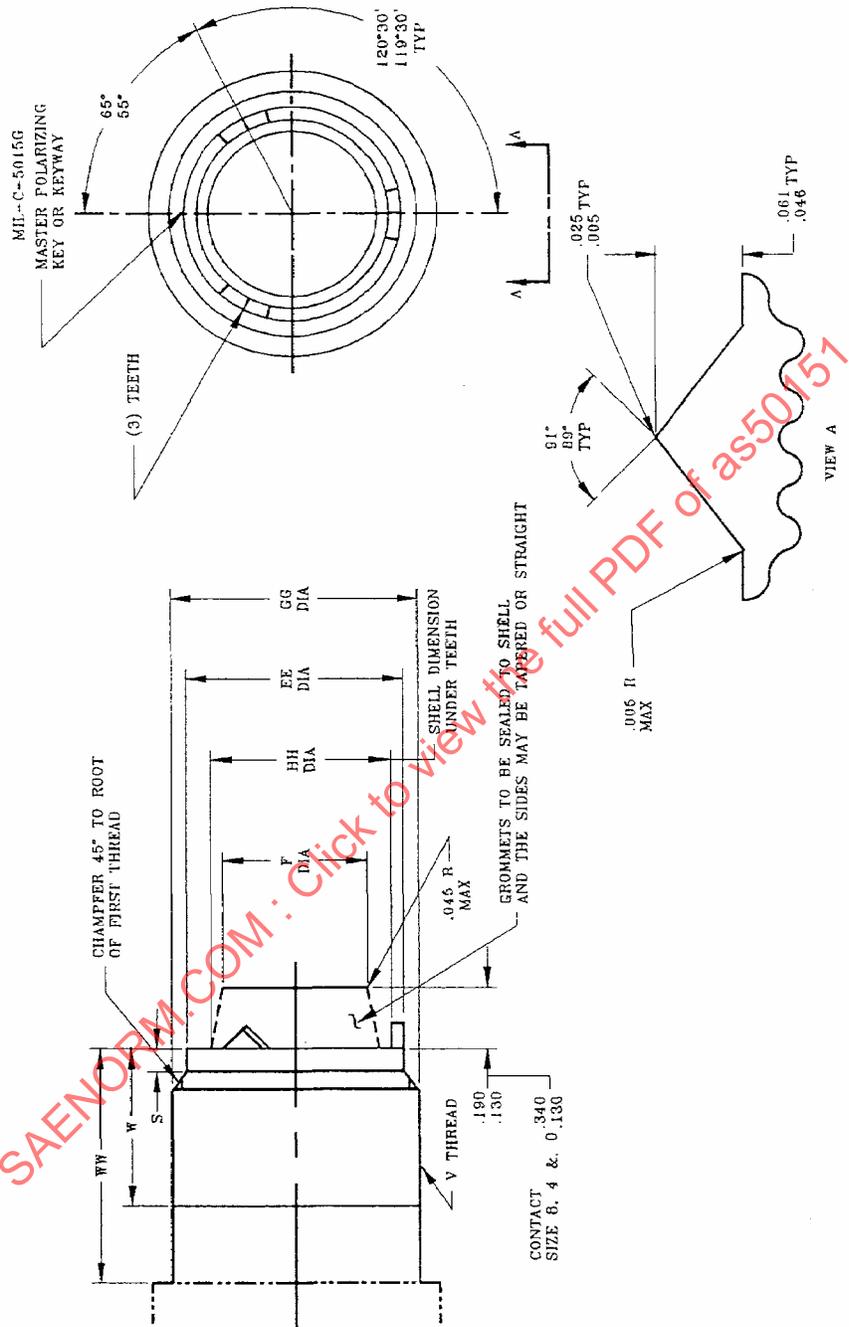


FIGURE 1. Crimp contacts connectors back end configuration except MS3402, MS3412, MS3452, SAE-AS34021 and SAE-AS34121

SAE AS50151

Shell size	V Thread class 2A	EE Dia	F Dia of any exposed portion of the grommet	GG +0.000 -0.010	HH ±0.005	S +0.005	W Min perf thread	WW Min 1/
8S	.500-20 UNF	0.426/0.419	0.275/0.305	0.500	0.368	0.065	0.290	0.310
10S, 10SL	.625-24 UNEF	0.562/0.555	0.380/0.405	0.625	0.502			
12S, 12	.750-20 UNEF	0.679/0.672	0.516/0.549	0.750	0.618			
14, 14S	.875-20 UNEF	0.804/0.797	0.590/0.665	0.875	0.743			
16, 16S	1.000-20 UNEF	0.929/0.922	0.715/0.790	1.000	0.868			
18	1.0625-18 UNEF	0.984/0.977	0.794/0.869	1.062	0.924			
20	1.1875-18 UNEF	1.109/1.102	0.919/0.994	1.187	1.049			
22	1.3125-18 UNEF	1.234/1.227	1.044/1.119	1.312	1.174			
24	1.4375-18 UNEF	1.359/1.352	1.159/1.244	1.437	1.299			
28	1.750-18 UNS	1.613/1.603	1.394/1.465	1.750	1.520			
32	2.000-18 UNS	1.863/1.853	1.640/1.715	2.000	1.770			
36	2.250-16 UN	2.113/2.103	1.855/1.930	2.250	1.985			
40	2.500-16 UN	2.363/2.353	2.070/2.145	2.500	2.200			
44	2.750-16 UN	2.613/2.603	2.325/2.400	2.750	2.455			
48	3.000-16 UN	2.858/2.848	2.575/2.650	3.000	2.705			

1/ Length to accommodate accessories

FIGURE 1. Crimp contact connectors back end configuration except MS3402, MS3412, MS3452, SAE-AS34021 and SAE-AS34121. - Continued

SAE AS50151

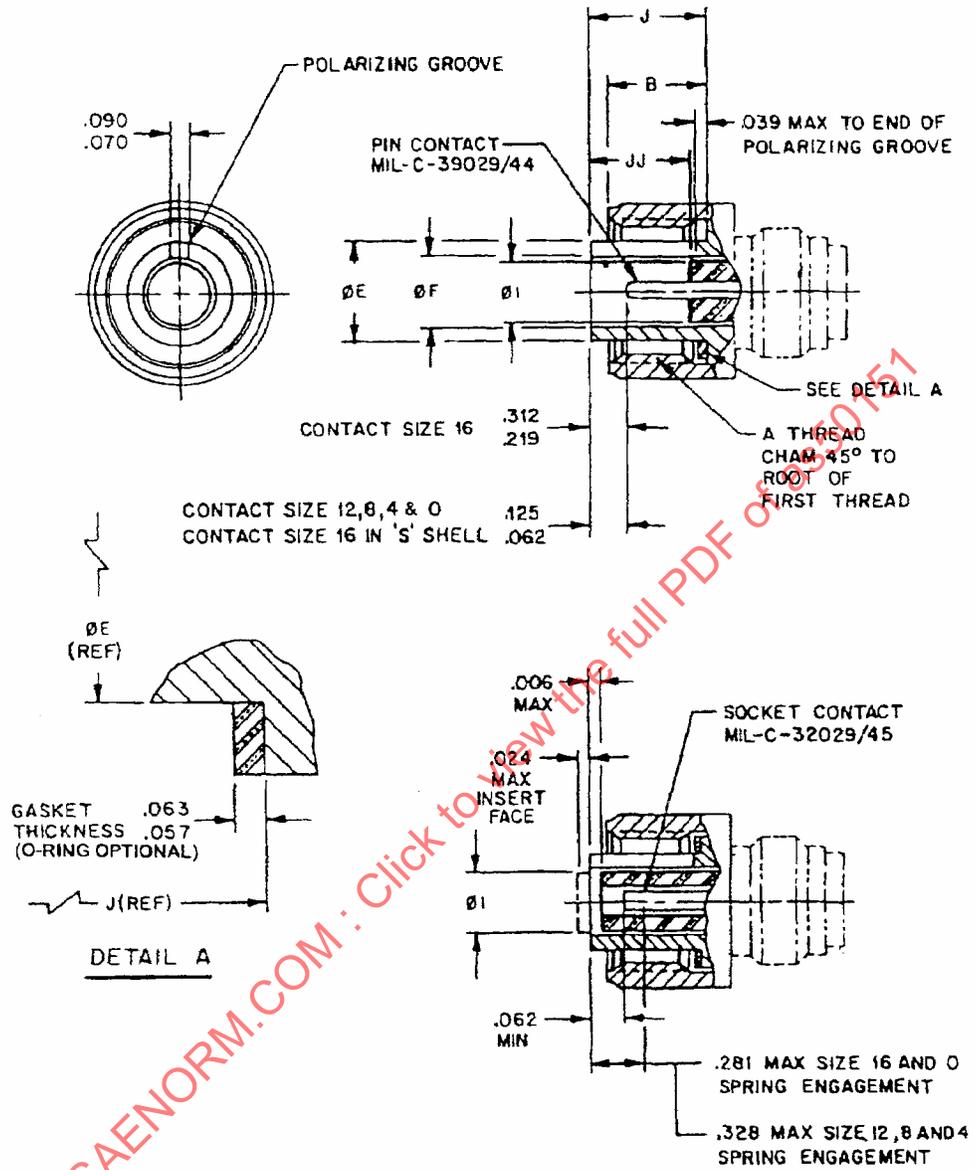


FIGURE 2. Connector, plug, front release, series II, interface dimensions.


SAE AS50151

Shell size	A Thread class 2B	B Dia +0.000 -0.062	E Dia +0.000 -0.010 1/	F Dia +0.015 -0.000 1/	I +0.000 -0.020	J ±0.005	JJ ±0.015
8S	.500-28 UNEF	0.414	0.365	0.252	0.250	0.570	0.501
10S	.625-24 UNEF		0.440	0.323	0.320		
10SL			0.446	0.398	0.397		
12S	.750-20 UNEF	0.664	0.555	0.450	0.448	0.757	0.689
12							
14S	.875-20 UNEF	0.414	0.675	0.526	0.525	0.570	0.501
14		0.664				0.757	0.689
16S	1.000-20 UNEF	0.414	0.805	0.651	0.650	0.570	0.501
16		0.664				0.757	0.689
18	1.125-18 UNEF		0.930	0.776	0.770		
20	1.250-18 UNEF		1.050	0.932	0.925		
22	1.375-18 UNEF		1.175	1.026	1.020		
24	1.500-18 UNEF		1.300	1.151	1.145		
28	1.750-18 UNS		1.520	1.370	1.365		
32	2.000-18 UNS		1.770	1.620	1.615		
36	2.250-16 UN		1.980	1.838	1.830		
40	2.500-16 UN	2.230	2.057	2.045			
44	2.750-16 UN	2.485	2.310	2.300			
48	3.000-16 UN	2.735	2.560	2.550			

1/ On shell size 10SL "E" dia tolerance is + 0.000, - 0.006 and "F" diameter tolerance is + 0.006, - 0.000.

FIGURE 2. Connector, plug, front release, series II, interface dimensions - Continued.

SAE AS50151

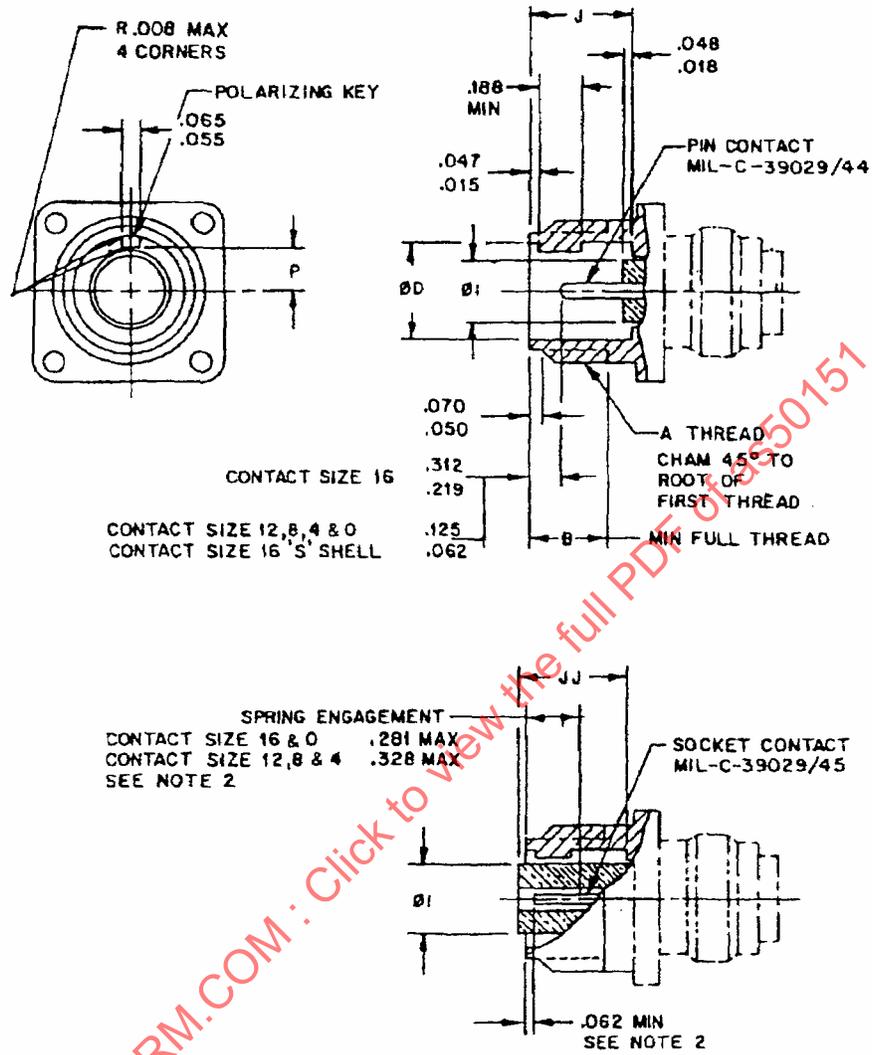

NOTES:

1. Dimensions are in inches.
2. For contact cavity insert interface dimensions see figure 6.


FIGURE 3. Connector, receptacle, front release, series II interface dimensions.

SAE AS50151

Shell size	A Thread class 2A	B Min thread	D Dia +0.015 -0.000	i Dia +0.000 -0.020	J ±0.005	JJ ±0.015	P +0.010 -0.000
8S	.500-28 UNEF	0.375	0.370	0.250	0.536	0.543	0.130
10S	.625-24 UNEF		0.448	0.320			0.165
10SL				0.397			
12	.750-20 UNEF	0.625	0.558	0.448	0.724	0.731	0.224
12S		0.375			0.536	0.543	
14	.875-20 UNEF	0.625	0.678	0.525	0.724	0.731	0.263
14S		0.375			0.536	0.543	
16	1.000-20 UNEF	0.625	0.808	0.650	0.724	0.731	0.325
16S		0.375			0.536	0.543	
18	1.125-18 UNEF	0.625	0.933	0.770	0.724	0.731	0.385
20	1.250-18 UNEF		1.053	0.925			0.463
22	1.375-18 UNEF		1.178	1.020			0.510
24	1.500-18 UNEF		1.303	1.145			0.573
28	1.750-18 UNS		1.323	1.365			0.683
32	2.000-18 UNS		1.773	1.615			0.808
36	2.250-16 UN		1.985	1.830			0.915
40	2.500-16 UN		2.237	2.045			1.023
44	2.750-16 UN		2.492	2.300			1.150
48	3.000-16 UN		2.742	2.550			1.275

FIGURE 3. Connector, receptacle, front release, series II interface dimensions - Continued.

SAE AS50151

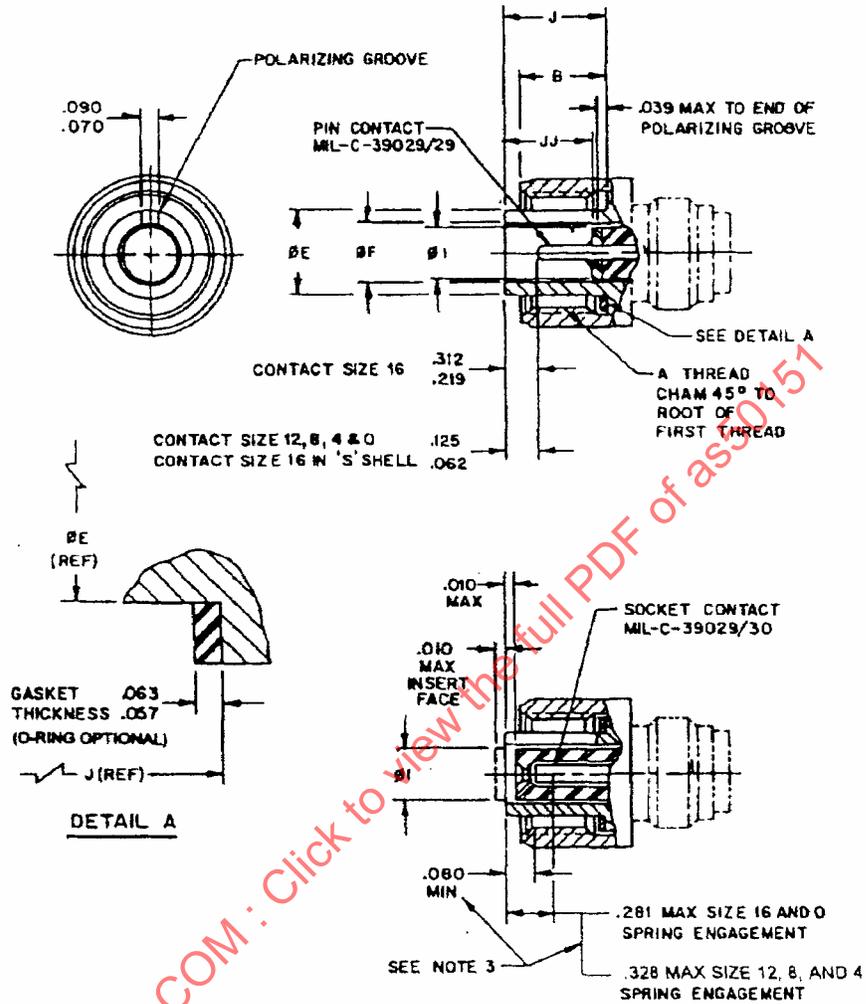

NOTES:

1. Dimensions are in inches.
2. For contact insert interface dimensions see figure 6.
3. Noted dimensions apply with contact fully seated back against contact retaining device.

FIGURE 4. Connector, plug, rear release, series III, interface dimensions.



SAE AS50151

Shell size	A Thread class 2B	B Dia +0.000 -0.062	E <u>1</u> / Dia +0.000 -0.010	F <u>1</u> / Dia +0.015 -0.000	I Dia +0.000 -0.020	J ±0.005	JJ ±0.011
8S	.500-28 UNEF	0.414	0.365	0.252	0.250	0.570	0.510
10S	.625-24 UNEF		0.440	0.323	0.320		
10SL			0.446	0.398	0.397		
12S	.750-20 UNEF	0.664	0.555	0.450	0.448	0.757	0.698
12							
14S	.875-20 UNEF	0.414	0.675	0.526	0.525	0.570	0.510
14		0.664				0.757	0.698
16S	1.000-20 UNEF	0.414	0.805	0.651	0.650	0.570	0.501
16		0.664				0.757	0.698
18	1.125-18 UNEF		0.930	0.776	0.770		
20	1.250-18 UNEF		1.050	0.932	0.925		
22	1.375-18 UNEF		1.175	1.026	1.020		
24	1.500-18 UNEF		1.300	1.151	1.145		
28	1.750-18 UNS		1.520	1.370	1.365		
32	2.000-18 UNS		1.770	1.620	1.615		
36	2.250-16 UN		1.980	1.838	1.830		
40	2.500-16 UN		2.230	2.057	2.045		
44	2.750-16 UN		2.485	2.310	2.300		
48	3.000-16 UN	2.735	2.560	2.550			

1/ On shell size 10SL "E" dia tolerance is + 0.000, - 0.006 and "F" diameter tolerance is + 0.006, - 0.000.

FIGURE 4. Connector, plug, rear release, series III interface dimensions - Continued.

SAE AS50151

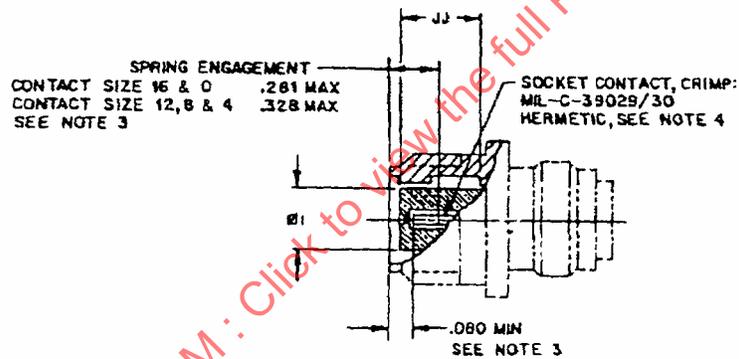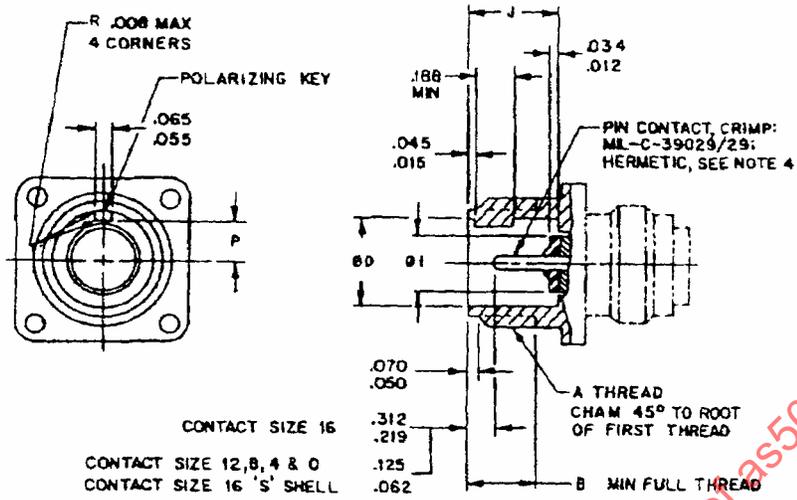

NOTES:

1. Dimensions are in inches.
2. For contact cavity insert interface dimensions see figure 6.
3. Noted dimensions apply with contact fully seated back against contact retaining device.
4. Hermetic connector contacts shall be fixed solder type contacts with mating end conforming to figure 7 socket or pin detail as required.


FIGURE 5. Connector, receptacle, rear release, series III and hermetic interface dimensions.

SAE AS50151

Shell size	A Thread class 2A	B Min thread	D Dia +0.015 -0.000	I Dia +0.000 -0.020	J ±0.005	JJ ±0.015	P +0.010 -0.000
8S	.500-28 UNEF	0.375	0.370	0.250	0.536	0.533	0.130
10S	.625-24 UNEF		0.448	0.320			0.165
10SL			0.397				
12	.750-20 UNEF	0.625	0.558	0.448	0.724	0.731	0.224
12S		0.375			0.536	0.533	
14	.875-20 UNEF	0.625	0.678	0.525	0.724	0.721	0.263
14S		0.375			0.536	0.533	
16	1.000-20 UNEF	0.625	0.808	0.650	0.724	0.721	0.325
16S		0.375			0.536	0.533	
18	1.125-18 UNEF	0.625	0.933	0.770	0.724	0.721	0.385
20	1.250-18 UNEF		1.053	0.925			0.463
22	1.375-18 UNEF		1.178	1.020			0.510
24	1.500-18 UNEF		1.303	1.145			0.573
28	1.750-18 UNS		1.523	1.365			0.683
32	2.000-18 UNS		1.773	1.615			0.808
36	2.250-16 UN		1.985	1.830			0.915
40	2.500-16 UN		2.237	2.045			1.023
44	2.750-16 UN		2.492	2.300			1.150
48	3.000-16 UN		2.742	2.550			1.275

FIGURE 5. Connector, receptacle, rear release, series III and hermetic interface dimensions - Continued.

SAE AS50151

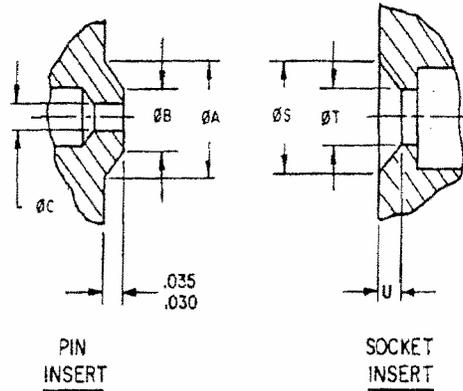


Contact Size	A Dia	B Dia	C Dia	S Dia	T Dia	U
16	0.150	0.135	0.061	0.140	0.079	0.035
	0.140	0.131	0.058	0.130	0.072	0.031
12	0.208	0.188	0.093	0.204	0.111	0.040
	0.198	0.184	0.090	0.193	0.104	0.035
8	0.310	0.270	0.141	0.306	0.159	0.040
	0.300	0.265	0.138	0.295	0.152	0.035
4	0.396	0.355	0.224	0.392	0.262	0.033
	0.386	0.350	0.221	0.381	0.234	0.027
0	0.578	0.537	0.356	0.573	0.414	0.033
	0.568	0.533	0.353	0.563	0.366	0.027

NOTE:

Dimensions are in inches.

FIGURE 6. Connector, rear release, series III, insert entry dimensions.

SAE AS50151

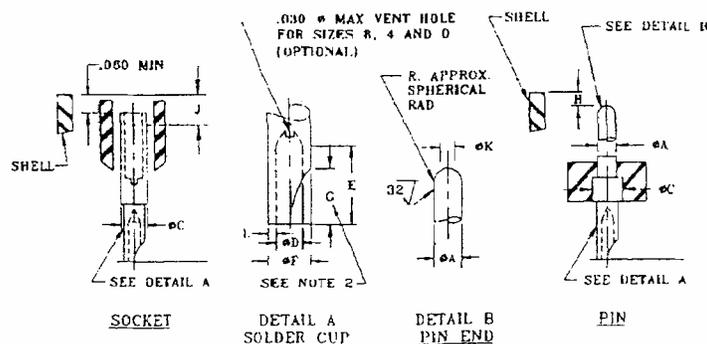

Contact size	A ± 0.001 Dia 1/	C Max Dia 2/	D Min Dia	E $+0.063$ -0.000	F Dia Max	H Plug min	H Recpt max	J Max plug and rept 3/	K Dia of flat	L min
16	0.0625	0.127	0.069	0.250	0.116	0.250	0.312	0.281	0.032 max	0.007
16S 4/	0.0625	0.127	0.069	0.250	0.116	0.062	0.125	0.281	0.032 max	0.007
12	0.094	0.190	0.112	0.375	0.154	0.062	0.125	0.375	0.032 max	0.009
8	0.142	0.310	0.205	0.500	0.268	0.062	0.125	0.375	0.032 max	0.017
4	0.225	0.441	0.328	0.625	0.398	0.062	0.125	0.375	0.105 ± 0.021	0.021
0	0.357	0.597	0.464	0.625	0.550	0.062	0.125	0.281	0.237 ± 0.021	0.021

1/ Applies after plating.

2/ Used for calculating mechanical spacing between contacts and between contacts and shell.

3/ Represents the distance from the end of the shell to the point at which the mating pin engages the socket contact spring.

4/ Dimensions shown are typical for shell sizes 8S, 10S, 10SL, 12S, 14S, and 16S.

NOTES:

1. Dimensions are in inches.

2. Sizes 12 and 16: G max = 2/3 E, radius of cutout optional.

Sizes 0, 4, and 8: Cutout optional.

FIGURE 7. Solder contact (pin and socket), series I configuration.

SAE AS50151

3.4.1.2 Crimp contacts:

Crimp contacts shall be designed to prevent damage to the contact retention device or sealing member during insertion or removal of the contact. Front release crimp contacts shall conform to MIL-C-39029/44 and MIL-C-39029/45 and be qualified to MIL-C-39029. Rear release contacts shall conform to MIL-C-39029/29 and MIL-C-39029/30 and be qualified to MIL-C-39029.

3.4.1.2.1 Installing and removal tools (front release connectors):

The individual contacts shall be positively retained in the connector when installed with the applicable MIL-I-81969/17 contact insertion tool. The individual contacts shall be capable of being removed from the connector when using the applicable MIL-I-81969/19 contact removal tool.

3.4.1.2.2 Installing and removal tools (rear release connectors):

The individual contacts shall be positively retained in the connector when installed with the applicable MIL-I-81969/14 contact insertion tool. The individual contacts shall be capable of being removed from the connector when using the applicable qualified MIL-I-81969/14, and /15 contact removal tool.

3.4.2 Insert design and construction:

Inserts shall be of voidless construction and secured to prevent rotation within the shell.

3.4.2.1 Insert retention:

3.4.2.1.1 Resilient inserts:

All resilient inserts shall be nonremovable from the shell.

3.4.2.1.2 Hard material inserts:

Hard material inserts for class A and B connectors having provisions for more than one alternate position shall be removable from the shell. However, they shall be retained within the shell when the conduit nut or adapter is removed.

3.4.2.2 Insert positioning:

Inserts shall be installed in the position indicated in the applicable MS sheet. Removable inserts shall be keyed to prevent rotation with respect to the shell. Slots and markings for any of the alternate positions, as well as specific design details, shall be as specified in MIL-STD-1651 (see 6.6.7).

SAE AS50151

3.4.2.2.1 Crimp contact inserts:

Crimp contact inserts shall be bonded to and non-removable from the shell.

3.4.2.3 Inserts for solder contact connectors:

Inserts containing nonremovable solder contacts shall not be damaged by the solder process.

3.4.2.4 Inserts for crimp contact connectors:

The insert and wire sealing grommet or insulating spacer of crimp contact connectors shall be one integral part and permit the removal and reinsertion of individual contacts without damage to the sealing members.

3.4.2.5 Contact arrangement:

Contacts shall be arranged in accordance with MIL-STD-1651. Except for contacts in hard insert, all solder cup openings, regardless of insert position, shall be oriented at right angles to and facing toward the key or keyway of the shell.

3.4.2.6 Contact spacing:

Unless otherwise specified in MIL-STD-1651, minimum mechanical spacing and creepage distance shall be as shown in table I.

TABLE I. Minimum contact spacing.

Minimum contact spacing (inch)		
Service rating	Air spacing	Creepage distance
Instrument	----	1/16
A	1/16	1/8
D	1/8	3/16
E	3/16	1/4
B	1/4	5/16
C	5/16	1

3.4.2.7 Contact alignment:

Inserts for socket contacts shall provide an overall sideplay of the socket contacts of 0.005 to 0.015 inch from the required position to facilitate alignment of mating pin contacts.

SAE AS50151

3.4.2.8 Contacts for class H connectors:

Contacts shall be fused into the vitreous inserts of class H connectors. A resilient face gasket shall be bonded to the pin insert to ensure an interfacial seal in mating with an environmental resistant counterpart connector.

3.4.3 Screw threads:

Screw threads intended to mate with parts of another approved manufacturer shall be UNEF, UNF, or NEF, class 2A or 2B, conforming to MIL-S-7742, except that 1-3/4-18 and 2-18 threads shall be UNS class 2A or 2B, conforming to FED-STD-H28. Screw threads shall be checked after plating by means of ring and plug gages only, in accordance with FED-STD-H28. Slight out-of-roundness beyond the tolerances of MIL-S-7742 is allowed if the threads can be checked without forcing the thread gages. Screw threads are permitted to be relieved provided the relief does not interfere with the performance of the screw threads (see 6.15).

3.4.4 Shell design:

Connector shells shall be seamless, except for class B, and retain their inserts.

3.4.4.1 Lubrication:

Connectors shall meet the requirements of this specification after all internal coupling ring threads have been coated with a lubricant.

3.4.4.2 Snap rings and slots:

When snap rings are used to retain the inserts in their shells in class A or B connectors, the snap rings shall be accessible, capable of repeated use, and of rectangular cross section. The snap ring slots shall have square sides and enough depth to prevent the snap ring from sliding, pulling, or twisting out of position.

3.4.4.3 Use of retaining devices:

When retaining rings or other devices are used in the coupling ring retention system for plugs and accessories, the retention devices shall be positively captivated or utilized in such a manner that the plugs and accessories shall remain electrically functional as an assembled connector in the event of a retention device failure.

3.4.4.4 Rear release connectors:

Connectors with rear release contact retention systems shall have blue color bands in accordance with the applicable MS standard.

SAE AS50151

3.4.5 Coupling connections:

Threaded coupling rings shall be knurled and designed so that the pin and socket contacts engage or disengage as the ring is respectively tightened or loosened. The coupling rings of crimp contact connector plugs shall be captive to the shell. The quick disconnect plugs shall be provided with gripping surfaces and be fastened to receptacles by a device that engages receptacle threads, but can be pulled free in an emergency.

3.4.5.1 Safety wiring of coupling rings:

All threaded coupling rings except SAE-AS34591 shall be designed for safety wiring. At least two holes shall be provided for shell sizes 14 and smaller, and at least three equally spaced holes for connector sizes 16 and larger. These holes shall be of a diameter to accommodate 0.032 inch diameter wire.

3.4.5.2 Shell polarization:

Polarization of connectors shall be accomplished by matched integral key and keyway of counterpart connectors. The polarization of counterpart connectors shall take place before coupling rings are engaged.

3.4.5.3 Engagement seal:

Pin contact connectors with resilient interfaces, except class A, shall contain sealing means so that the engaged contacts meet with the requirements of 3.4.1. The design of the seal shall be such that in mated connectors all air paths between adjacent contacts and between contacts and shells are eliminated. There shall be interfacial mating of the engaged connector insert to provide dielectric under compression of 0.005 inch minimum. Plug connectors shall have a peripheral seal. Connector plug shells with threaded coupling rings shall be provided with a static peripheral seal to ensure shell to shell sealing.

3.4.6 Wire sealing:

3.4.6.1 Class D, E, F, K, KS, KT, L, R, U, and W connectors:

Class D, E, F, K, KS, KT, L, R, U, and W connectors, except MS3102, MS3402, MS3412, MS3452, SAE-AS34021, and SAE-AS34121 shall be provided with a wire sealing grommet capable of sealing on wires of the sizes specified in table II.

SAE AS50151

TABLE II. Wire range accommodations.

Contact size	Wire size	Outside diameter (OD) of finished wire (inch) <u>1/</u>					
		Solder contact connectors		Crimp contact connectors			
		min <u>2/</u>	max	Front release		Rear release	
		min <u>2/</u>	max	min <u>2/</u>	max	min <u>2/</u>	max
16-22 <u>3/</u>	26 24 22	N/A	N/A	0.066	0.130	N/A	N/A
16-16, 12-16 <u>4/</u>	20 18 16	0.064	0.130	0.066	0.130	0.053	0.103
12-12	14 12	0.114	0.170	0.097	0.170	0.085	0.158
8-8	10 8	0.164	0.255	0.132	0.255	0.132	0.255
4-4	6 4	0.272	0.370	0.237	0.370	0.237	0.370
0-0	2 0	0.415	0.550	0.360	0.550	0.360	0.550

1/ Wire reference MIL-W-16878, MIL-W-22759, MIL-DTL-81381, and MIL-C-915.

2/ For OD smaller than that specified, see 6.1.1.

3/ For series II only.

4/ Only crimp contact connector data applies to size 12-16 contacts.

Note: N/A Not applicable.

3.4.6.1.1 Solder contact connectors:

Class F and R solder contact connectors shall be provided with a removable resilient grommet and retaining feature. The grommet shall be designed to fit against the rear face of the insert with the retaining feature in the installed condition. The design of the seal shall be such that in mated connectors all air paths between adjacent contacts and between contacts and shells are eliminated. There shall be interfacial mating of the engaged connector insert to provide dielectric under compression of not less than 0.005 inch. Connector plug shells with threaded coupling rings shall be provided with a static peripheral seal to ensure shell to shell sealing.

SAE AS50151

3.4.6.1.1.1 Class P connectors:

Class P connectors shall be provided with a plastic potting form capable of accepting and bonding to MIL-PRF-8516 or MIL-PRF-23586 potting material. Inserts of class P connectors shall be designed so that potting material adheres to the shell and insert without treatment by the user.

3.4.6.1.1.2 Class H connectors:

Class H connectors shall not be supplied with a wire sealing grommet. However, the shells and inserts shall be designed so that MIL-PRF-8516 or MIL-PRF-23586 potting compound adheres to the insert without treatment by the user.

3.4.6.1.2 Crimp contact connectors:

Crimp contact connectors shall be provided with an integral grommet and insert.

3.4.6.1.2.1 Grommet sealing plugs:

Grommets shall be designed to accept sealing plugs in accordance with MS3187 or MS27488, in lieu of wire where unused contacts are employed. Except for contact sizes 0 and 4, sealing plugs for 15 percent of the number of contacts, but not less than one sealing plug shall be enclosed in the unit package. For indirect shipments, connectors are permitted to be ordered without grommet sealing plugs (see 6.2). For insert arrangements containing one contact of a particular size, sealing plugs shall not be supplied (see 6.2).

3.5 Intermateability and interchangeability:

3.5.1 Intermateability:

Connectors shall be intermateable. When different types of connectors (front or rear release) or different types of contacts (crimp or solder) are used in a mated pair of connectors, the applicable requirements specified herein for the type or class shall be met.

3.5.2 Interchangeability:

All connectors and accessories having the same part number shall be completely interchangeable with each other with respect to installation (physical) and performance (function) as specified herein.

3.6 Magnetic permeability (except classes H and K):

The relative magnetic permeability of connectors and accessories and connectors with thermocouple contacts shall be not greater than 2.0 when tested in accordance with 4.6.2.

SAE AS50151

3.7 Disengagement (MS3107, MS3507):

The axial tension required to separate the plug shell (insert removed) from receptacle shall be 8 ± 4 pounds, when tested in accordance with 4.6.3.

3.8 Temperature cycling (thermal shock):

Connectors shall continue to meet the requirements of this specification after being subjected to the temperature extremes specified in 4.6.4.

3.9 Air leakage:

3.9.1 Solder contact receptacles (except class A, B, H, and P):

The air leakage rate shall be not greater than one atmospheric cubic inch per hour (4.55×10^{-3} cubic centimeters per second). The specified leakage rate shall apply through the connector and not through the flange and mounting surface area when tested in accordance with 4.6.5.1.

3.9.2 Class H receptacles:

The air leakage rate shall not exceed 0.1 micron cubic foot per hour (1×10^{-6} cubic centimeters per second) when tested in accordance with 4.6.5.2. The specified leakage rate shall apply through the connector and not through the flange and mounting surface area, unless solder mounted.

3.10 Contact retention:

The axial displacement of crimp contacts shall not be greater than 0.025 inch and contacts shall be retained in their inserts when subjected to the axial loads specified in 4.6.6 or 4.6.6.1.

3.11 Dielectric withstanding voltage:

Connectors shall show no evidence of breakdown or flashover when subjected to the test voltages and altitudes in accordance with 4.6.7. Corona shall not be considered as breakdown.

3.12 Vibration:

3.12.1 Sine vibration:

Mated connectors shall not be damaged and there shall be no loosening of parts due to vibration. Counterpart connectors shall be retained in full engagement, and the interruption of electrical continuity shall be not longer than 10 microseconds when tested in accordance with 4.6.8.1 or 4.6.8.2.

SAE AS50151

3.12.2 Random vibration:

A current discontinuity of 10 microseconds or more, disengagement of the mated connectors, evidence of cracking, breaking, or loosening of parts shall be cause for rejection when tested in accordance with 4.6.8.3.

3.13 Shock:

Mated connectors shall not be damaged and there shall be no loosening of parts, nor shall there be an interruption of electrical continuity longer than 10 microseconds during the exposure to mechanical shock when tested in accordance with 4.6.9.

3.14 Humidity:

Mated connectors shall withstand the applicable voltage in table III for 5 minutes minimum after being tested in accordance with 4.6.10.

TABLE III. Test voltages after humidity.

Service rating	Test voltage (volts-rms)
Instrument	300
A	750
D	1,350
E	1,875
B	2,575
C	4,500

3.15 Contact resistance:

Contacts in the mated condition shall meet the ambient 25 °C (77 °F) contact resistance requirements of MIL-C-39029 except the potential drop of class H contacts shall be not greater than 125 mV initially or 200 mV after conditioning when tested in accordance with 4.6.11.

3.16 Durability:

Counterpart connectors shall show no mechanical or electrical defects detrimental to the operation of the connector after 100 cycles of coupling and uncoupling for crimp contact connectors, or of mating and unmating for solder contact connectors when tested in accordance with 4.6.12.

3.17 Corrosion:

Connectors shall show no exposure of the basis metal that will adversely effect performance when tested in accordance with 4.6.13.

SAE AS50151

3.18 Insulation resistance:

3.18.1 At room temperature:

The insulation resistance shall be not less than 5000 megohms when tested in accordance with 4.6.14.1.

3.18.2 At elevated temperature-short time (solder type only):

The insulation resistance shall be as shown on figure 8 when tested in accordance with 4.6.14.3.

3.18.3 At elevated temperature-long time:

The insulation resistance shall be as shown on figure 8 when tested in accordance with 4.6.14.4.

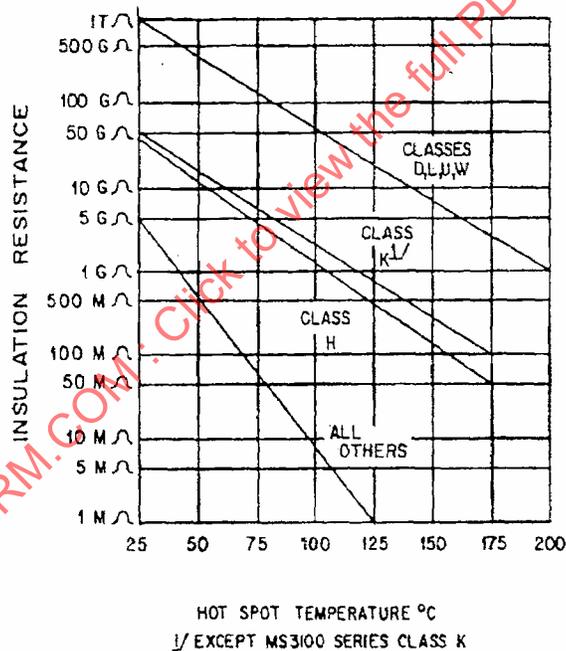


FIGURE 8. Minimum insulation resistance vs hot spot temperature.

3.19 Fluid immersion:

Connectors shall mate with their counterpart connectors after fluid immersion in accordance with 4.6.15.

SAE AS50151

3.20 Firewall (class K connectors):

Mated connectors shall prevent passing of a flame through the connector for at least 20 minutes when tested in accordance with 4.6.16. During this period there shall be no flame from outgassing or other causes on the end of the connector protected by the firewall. The current specified in table XV shall be applied for the first 5 minutes without a break in continuity. During the next minute the current drawn by the connector shall be not greater than 2 amperes when a test potential of 100-125 vac at 60 Hz is applied between adjacent contacts and between contacts and the shell.

3.21 Insert retention:

Inserts shall not be dislocated from their original positions or damaged when they are subjected to the pressures specified in 4.6.17.

3.22 Moisture resistance:

Mated connectors with rear accessory hardware assembled shall maintain an insulation resistance of 100 megohms or greater at 25 °C (77 °F) after being subjected to the moisture resistance test in accordance with 4.6.18.

3.23 Water pressure:

3.23.1 Solder contact receptacles (except classes A, B, H, K, and P):

When tested in accordance with 4.6.19.1, receptacle inserts and panel seals shall show no leakage. In addition, there shall be no evidence of leakage at the interface of mated connectors. At the end of 48 hours while still immersed, the insulation resistance of mated connectors shall be not less than 100 megohms. After removal of unmated connectors from the immersion tank, the insulation resistance shall be not less than 100 megohms (see 4.6.19.1).

3.23.2 Crimp contact connectors:

Mated connectors class D, L, U, and W assembled with MIL-C-85049/11 backshells insulation resistance shall be not less than 100 megohms after being subjected to the water pressure test. They shall show no evidence of entrance of water when tested in accordance with 4.6.19.2.

3.24 External bending moment:

Connectors shall exhibit no evidence of damage, as revealed by inspection with 3X magnification, when stressed using the applicable bending moment in accordance with 4.6.20.

SAE AS50151

3.25 Contact engaging and separating forces (solder contacts):

The socket contact engaging and separating forces shall be within the applicable limits specified in table IV when tested in accordance with 4.6.21.

TABLE IV. Contact engagement and separation forces.

Contact mating end size	Minimum separation force (ounces) minimum diameter SAE-AS31971 pin	Maximum average engagement force (ounces) maximum diameter SAE-AS31971 pin	Maximum engagement force (ounces) maximum diameter SAE-AS31971
16	2	33	48
12	3	56	80
8	5	N/A	160
4	10	N/A	240
0	15	N/A	320

Note: N/A – Not applicable.

3.26 Resistance to probe damage (size 16 solder socket contacts only):

Socket contacts shall meet the engagement and separation force requirements specified in 3.25 after being subjected to the resistance to probe damage in accordance with 4.6.22.

3.27 Shell conductivity (crimp connectors):

Mated connectors shall be electrically conductive from the plug accessory thread to the receptacle mounting flange or to the accessory thread on the cable connecting plug. The overall dc resistance shall be not greater than 0.005 ohm for class D and W or 0.05 ohm for all other classes when measured in accordance with 4.6.23.

3.28 Contact insertion and removal forces (crimp connectors):

The forces required to insert and remove unlocked contacts shall not exceed the requirements specified in table V when tested in accordance with 4.6.24.

SAE AS50151

TABLE V. Contact insertion and removal forces.

Contact size	Insertion and removal forces (pounds, maximum)
16	20
12	25
8	30
4	40
0	40

3.29 Altitude immersion (series III only):

The mated connectors insulation resistance shall be not less than 1000 megohms when tested in accordance with in 4.6.25. Any evidence of dielectric breakdown or flashover shall be cause for rejection.

3.30 Marking:

Each connector shall be legibly and permanently marked on the shell or coupling ring in accordance with MIL-STD-1285. An example of the military part number is shown in 6.6. The date code, manufacturer name, symbol or code, and assembly plant symbol or code is required for all connector types. Metal stamping of part numbers is acceptable after plating. Metal impression marking, if used, shall show no exposure of unprotected basis metal which will adversely affect performance. Marking shall be legible after corrosion testing (see 3.17 and 4.6.13). Manufacturers' symbols or trademark shall be listed in SAE-AIR1351.

3.30.1 Insert marking:

Inserts shall be marked as specified in MIL-STD-1651. Manufacturer's identification is permitted. Raised or depressed characters shall not be used on insert mating faces for any markings of crimp contact connectors.

3.30.1.1 Contact designations:

Contact identification on crimp connector inserts shall be designated by identifiable letters or numbers of contrasting color. Contact identification on solder contact inserts by use of contrasting color is permissible. Positioning and arrangement of the characters shall be such that the contact cavity is readily identifiable. All contacts shall be designated on the front face of the insert. Eighty percent of the characters on any face of the connector shall remain identifiable after completion of the tests specified in tables VI and VII.

SAE AS50151

3.30.1.1.1 Grommet and insulating spacers:

Wire openings on the rear face of grommets and insulating spacers shall be marked with legible characters corresponding to the insert contact designators. Raised, depressed, or contrasting colored characters shall be used. It is permissible to identify only those wire openings which are located on the vertical centerline of the grommets of solder contact connectors.

3.30.2 Use of MS sheet designations:

MS sheet designations shall not be applied to a product, except for qualification test samples (see 6.14), until notification has been received from the activity responsible for qualification that the product has been approved for listing on the qualified products list (QPL).

3.30.3 JAN brand:

The United States Government has adopted, and is exercising legitimate control over the certification marks, "JAN" and "J", respectively, to indicate that items so marked or identified are manufactured to, and meet all the requirements of specifications. Accordingly, items acquired to, and meeting all the criteria specified herein and in applicable specifications shall bear the certification mark "JAN" except that items too small to bear the certification mark "JAN" shall bear the letter "J". The "JAN" or "J" shall be placed immediately before the part number except that if such location would place a hardship on the manufacturer in connection with such marking, the "JAN" or "J" may be located on the first line above or below the part number. Items furnished under contracts or orders which either permit or require deviation from the conditions or requirements specified herein or in applicable specifications shall not bear "JAN" or "J". In the event an item fails to meet the requirements of this specification and the applicable specification sheets or associated specifications, the manufacturer shall remove completely the military part number and the "JAN" or "J" from the sample tested and also from all items represented by the sample. The "JAN" or "J" certification mark shall not be used on products acquired to contractor drawings or specifications. The United States Government has obtained Certificate and Registration Number 504,860 for the certification mark "JAN" and Registration Number 1,586,261 for the certification mark "J".

3.31 Workmanship:

Loose contacts, poor molding fabrication, loose materials, defective bonding, damaged or improperly assembled contacts, peeling, or chipping of plating or finish, galling of mating parts, nicks and burrs of metal parts, and warping of the post molding shall be a basis for rejection of items.

TABLE VI. Qualification inspection for solder contact connectors.

Inspection	Requirement paragraph	Test paragraph
------------	-----------------------	----------------

SAE AS50151

Inspection	Requirement paragraph	Test paragraph
Group 1		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Magnetic permeability (except class K)	3.6	4.6.2
Disengagement (MS3107, MS3507 plug only)	3.7	4.6.3
Temperature cycling	3.8	4.6.4
Contact retention	3.10	4.6.6.1
Dielectric withstanding voltage	3.11	4.6.7.1
Vibration	3.12.1	4.6.8.1
Dielectric withstanding voltage	3.11	4.6.7.1
Shock	3.13	4.6.9.1
Humidity	3.14	4.6.10
Dielectric withstanding voltage	3.11	4.6.7.4
Contact resistance	3.15	4.6.11
Durability	3.16	4.6.12
Corrosion	3.17	4.6.13
Contact resistance	3.15	4.6.11
Insulation resistance (long time)	3.18.3	4.6.14.4
Fluid immersion	3.19	4.6.15.1
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Group 2		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Firewall	3.20	4.6.16
Group 3		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Magnetic permeability	3.6	4.6.2
Temperature cycling	3.8	4.6.4
Air leakage	3.9	4.6.5.1
Contact retention	3.10	4.6.6.1
Insert retention	3.21	4.6.17
Dielectric withstanding voltage	3.11	4.6.7.1

SAE AS50151

TABLE VI. Qualification inspection for solder contact connectors - Continued.

Inspection	Requirement paragraph	Test paragraph
Vibration	3.12.1	4.6.8.1
Dielectric withstanding voltage	3.11	4.6.7.1
Shock	3.13	4.6.9.1
Moisture resistance	3.22	4.6.18.2
Contact resistance	3.15	4.6.11
Durability	3.16	4.6.12
Corrosion	3.17	4.6.13
Contact resistance	3.15	4.6.11
Insulation resistance (short time)	3.18.2	4.6.14.3
Fluid immersion	3.19	4.6.15.1
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Group 4		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Temperature cycling	3.8	4.6.4
Air leakage	3.9.1	4.6.5.2
Dielectric withstanding voltage	3.11	4.6.7.1
Insulation resistance	3.18.1	4.6.14.4
Durability	3.16	4.6.12
Vibration	3.12.1	4.6.8.1
Shock	3.13	4.6.9.1
Moisture resistance	3.22	4.6.18.2
Corrosion	3.17	4.6.13
Contact resistance	3.15	4.6.11
Insert retention	3.21	4.6.17
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Group 5		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Dielectric withstanding voltage	3.11	4.6.7.1
Insulation resistance	3.18.1	4.6.14.1
Fluid immersion	3.19	4.6.15.2
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1

SAE AS50151

TABLE VI. Qualification inspection for solder contact connectors - Continued.

Inspection	Requirement paragraph	Test paragraph
Group 6		
Contact engaging and separating forces	3.25	4.6.21
Resistance to probe damage (size 16 only)	3.26	4.6.22
Contact engaging and separating forces	3.25	4.6.21
Corrosion (5 contacts only)	3.17	4.6.13
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1

TABLE VII. Qualification inspection for crimp contact connectors.

Inspection	Requirement paragraph	Test paragraph
Group 1		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Magnetic permeability (except class K)	3.6	4.6.2
Shell conductivity	3.27	4.6.23
Contact insertion and removal forces	3.28	4.6.24
Contact retention	3.10	4.6.6
Insulation resistance	3.18	4.6.14
Temperature cycling	3.8	4.6.4
Dielectric withstanding voltage	3.11	4.6.7.2
Water pressure (series II only)	3.23.2	4.6.19.2
Altitude immersion (series III only)	3.29	4.6.25
Durability (except dynamic corrosion classes)	3.16	4.6.12
Vibration (series II only)	3.12.1	4.6.8.1
Random vibration (series III only)	3.12.2	4.6.8.3
Shock	3.13	4.6.9
Moisture resistance	3.22	4.6.18
Corrosion (except dynamic corrosion classes)	3.17	4.6.13.2
Dynamic corrosion	3.17	4.6.13
Contact resistance	3.15	4.6.11
Insert retention	3.21	4.6.17
Contact retention	3.10	4.6.6
External bending moment	3.24	4.6.20
Visual and mechanical	3.1, 3.3, 3.4, 3.5 3.30, and 3.31	4.6.1

SAE AS50151

TABLE VII. Qualification inspection for crimp contact connectors - Continued.

Inspection	Requirement paragraph	Test paragraph
Group 2		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Insulation resistance	3.18	4.6.14.1
Dielectric withstanding voltage	3.11	4.6.7.2
Dielectric withstanding voltage (altitude)	3.11	4.6.7.3
Insulation resistance (long time)	3.18.3	4.6.14.4
Contact resistance	3.15	4.6.11
Dielectric withstanding voltage	3.11	4.6.7.2
Insert retention	3.21	4.6.17
Contact retention	3.10	4.6.6
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Group 3		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Contact insertion and removal forces	3.28	4.6.24
Contact retention	3.10	4.6.6
Visual and Mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Group 4		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Firewall	3.20	4.6.16
Group 5		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Insulation resistance	3.18	4.6.14
Dielectric withstanding voltage	3.11	4.6.7.2
Fluid immersion (class D, U, G, K, L, and W)	3.19	4.6.15
Dielectric withstanding voltage	3.11	4.6.7.2
Insert retention	3.21	4.6.17
Contact retention	3.10	4.6.6
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1

SAE AS50151

TABLE VII. Qualification inspection for crimp contact connectors - Continued.

Inspection	Requirement paragraph	Test paragraph
Group 6		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Temperature cycling	3.8	4.6.4
Dielectric withstanding voltage	3.11	4.6.7.2
Durability	3.16	4.6.12
Moisture resistance	3.22	4.6.18.1
Contact resistance	3.15	4.6.11
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Group 7 (class D only)		
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Temperature cycling	3.8	4.6.4
Dielectric withstanding voltage	3.11	4.6.7
Water pressure	3.23.2	4.6.19.2
Vibration	3.12.1	4.6.8.2
High impact shock	3.13	4.6.9
Dielectric withstanding voltage	3.11	4.6.7
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1

3.32 Dust caps:

Dust caps in accordance with MS90376 shall be placed on the end of each connector. Hermetic connectors require caps on both ends or some other means to prevent damage to the termination end of the connector.

4. VERIFICATION:

4.1 Classification of inspections:

The inspection requirements specified herein are classified as follows:

- a. Qualification inspection (4.3).
- b. Conformance inspection (4.4).
- c. Periodic inspection (4.5).

SAE AS50151

4.1.1 Inspection conditions:

Unless otherwise specified herein, all inspections shall be performed under any combination of conditions within the following ranges. Any specified condition shall not affect the other two ambient ranges.

Temperature: 15 to 35 °C (59 to 95 °F).

Relative humidity: 30 to 80 percent.

Barometric pressure: 650 to 800 mm of mercury.

4.2 Test equipment and inspection facilities:

Test and measuring equipment and inspection facilities shall perform the required inspections. The establishment and maintenance of a calibration system to control the accuracy of the measuring and test equipment shall be in accordance with ANSI-Z540.1.

4.2.1 Assembly plants:

Assembly plants shall be listed on or be approved for listing on MIL-DTL-5015 qualified products list. The qualified connector manufacturer shall certify that the assembly plant is approved for the distribution of the manufacturer's parts. The assembly plant shall use only piece parts supplied by the qualified connector manufacturer. No testing other than visual examination is required of certified piece parts obtained from the qualified connector manufacturer, except when there is cause for rejection. Assemblies produced at the assembly plant shall be subjected to inspection to ensure that the assembly process conforms with that established at the qualified manufacturing plant. Quality control requirements, including Government inspection surveillance, shall be the same as required for the qualified connector manufacturer. Assembly plants shall list their symbols or trademarks in SAE-AIR1351.

4.3 Qualification inspection:

Qualification inspection shall consist of the examinations and tests performed in the sequence specified in tables VI and VII on the qualification test samples specified in 4.3.2. After receipt of the letter of authorization from the agent responsible for qualification, the applicant shall submit one copy of his test reports (certified by the Government inspector indicating the extent to which the tests were witnessed) to the agent responsible for qualification.

4.3.1 Qualification of additional connectors:

Qualification by similarity to qualified components or to components submitted for qualification is permissible when materials, designs, and manufacturing processes are similar. The manufacturer shall provide to the qualifying activity, full details of the similarities and differences of the components and manufacturing processes, and a proposed qualification test program which will address the differences. Testing shall not begin until the manufacturers proposal has been approved or modified by the qualifying activity.

4.3.2 Qualification samples:

Samples of each item submitted for qualification shall be tested in the sequence specified in tables VI or VII, as required. Specific details on preparation of samples shall be as follows: Each connector subjected to qualification testing shall be provided with a counterpart connector for those tests requiring mating assemblies. The counterpart connectors provided for this purpose shall be new, previously qualified connectors or new connectors submitted for qualification testing. Manufacturers not producing mating connectors shall submit data substantiating that tests were performed with approved counterpart connectors. For crimp contact connectors, two cavities of each sample shall contain unwired contacts and sealing plugs in accordance with MS27488. Connectors with less than four contacts of a given contact size shall not have sealing plugs installed for that contact size.

4.3.2.1 Wire-to-contact assembly:

Unless otherwise specified (see 4.3.2.7.4), connectors shall be wired using wire selected from those specified in table II. Where wired contacts are required, terminations shall be accomplished as specified in 4.3.2.1.1 or 4.3.2.1.2.

4.3.2.1.1 Solder contacts:

Solder in accordance with J-STD-001 shall be used. For class H connectors, termination of wire to solder terminals shall be accomplished with solder conforming to J-STD-006, composition Ag 1.5 or Sn 10.

4.3.2.1.2 Crimp contacts:

Crimp contacts shall be crimped with tools conforming to MIL-DTL-22520 as specified in MIL-C-39029 /29, /30, /44, or /45.

SAE AS50151

4.3.2.2 Solder contact connectors (class A, B, C, and P):

Qualification samples and qualification tests for solder contact connectors in class A, B, C, and P shall consist of two complete connector assemblies of class A or C wall mounting receptacles and class A or B straight plugs, each with insert arrangements with the greatest number of contacts submitted for qualification in each shell size range, which shall pass the tests of table VI, group 1. Qualification testing of these samples qualifies other shell types and the balance of insert arrangements in class A, B, C, and P by similarity. Testing of solder contacts need not be performed if compliance of similar contacts has previously been demonstrated in conjunction with qualification testing of connectors of a different class.

4.3.2.3 Solder contact connectors (class H):

Qualification samples and qualification tests for solder contact connectors in class H shall be as specified in 4.3.2.1 and 4.3.2.2.

4.3.2.3.1 Group 4:

Two class H receptacles in each shell size range with insert arrangements with the greatest number of contacts for which qualification is desired, together with mating class D, F, L, P, R, U, or W straight plugs, shall pass the tests of table VI, group 4.

4.3.2.3.2 Group 5:

Four class H receptacles from each shell size range (small range: 8S to 16; medium range: 18 to 28; and large range: 32 to 48) with insert arrangements representing typical manufacturing shall pass the group 5 tests of table VI. Where mating plugs are required class K or L shall be used. Qualification testing of the samples qualifies all other shell types and the balance of shell sizes and insert arrangements in class H by similarity.

4.3.2.4 Solder contact connectors (classes F and R):

Qualification samples and qualification tests for solder contact connectors in classes F and R shall consist of two complete connector assemblies, class R wall mounting receptacles and class F straight plugs, each with insert arrangements with the greatest number of contacts for which qualification is desired, in each shell size, which shall pass the tests of table VI, group 3. For test purposes, contacts shall be wired in accordance with 4.3.2.1 except that for each size contact, no more than two wires or 10 percent of the wires, whichever is greater, shall be the larger of the two sizes shown in table II. Qualification testing of these samples qualifies other shell types and the balance of insert arrangements in class F and R by similarity. Testing of solder contacts need not be performed if compliance of similar contacts has previously been demonstrated in conjunction with qualification testing of connectors of a different class.

4.3.2.5 Series I connectors (class K):

SAE AS50151

Qualification samples and qualification tests for series I connectors in class K shall consist of the complete connector assemblies. Qualification testing of these samples qualifies other shell types and the balance of insert arrangements in class K by similarity.

4.3.2.5.1 Group 1:

Two complete connector assemblies, class K wall mounting receptacles and straight plugs, each with insert arrangements with the greatest number of contacts for which qualification is desired, in each shell size, shall pass the tests specified in table VI, group 1.

4.3.2.5.2 Group 2:

Two complete connector assemblies, class K wall mounting receptacles and straight plugs, from each shell size range with insert arrangement having the greatest number of contacts for which qualification is desired, shall be assembled with wire conforming to MIL-W-25308 and pass the tests specified in table VI, group 2.

4.3.2.6 Socket contacts for solder contact connectors, group 6:

Twenty of each socket contact size and configuration used in the solder contact connectors shall pass the tests of table VI, group 6. Sockets which are not completely assembled prior to installation in the insert such as class H, socket style, are permitted to be provided and tested in connectors.

4.3.2.7 Crimp contact connectors:

Qualification samples and qualification tests for crimp contact connectors in classes D, K, L, W, and U shall be as specified in the following paragraphs. Shell sizes are grouped into three ranges (small range: 8S to 16; medium range: 18 to 28; large range: 32 to 48) for qualification testing. Successful completion of the qualification tests in table VII qualifies:

- a. For the shell size submitted, all shell sizes and styles within the range.
- b. For the service ratings submitted, all contact arrangements complying with those service ratings.

SAE AS50151

4.3.2.7.1 Group 1:

Two connectors of each class with insert arrangements in each shell size range (small, medium, and large) of each contact retention system to be qualified shall pass the group 1 tests of table VII. One sample shall have the pin insert in the plug and the socket insert in the receptacle. The other sample shall have the inserts reversed. One sample shall be terminated with wire approaching the minimum OD specified in table II, and the other with maximum OD wire. The connectors shall be tested with an MIL-C-85049/52 strain relief clamp assembled on the back threads or other appropriate backshell hardware. The receptacles shall be wall mounting.

4.3.2.7.2 Group 2:

One connector of each class (for each service rating) with insert arrangements having the maximum contact density and of each contact retention system to be qualified shall pass the group 2 tests of table VII. The plug shall have socket inserts, and the receptacle pin inserts, and shall be terminated with the maximum OD wire specified in table II. Backshell hardware shall be the same as group 1, and the receptacles shall be wall mounted.

4.3.2.7.3 Group 3:

Additional connectors shall be supplied to provide a minimum of 10 contact cavities of each contact size and of each contact retention system. These connectors shall pass the group 3 tests of table VII. Additional contact sizes are permitted to be qualified by completion of the group 3 tests.

4.3.2.7.4 Group 4 (class K only):

One class K connector in each shell size range with insert arrangements representing typical manufacturing and of each contact retention system to be qualified shall pass the group 4 tests of table VII. Each connector shall be assembled with wire conforming to MIL-W-25038.

4.3.2.7.5 Group 5:

Twelve class D, U, K, L, or W connectors with insert arrangements in the medium shell size range shall pass the group 5 tests of table VII. All samples shall have the socket insert in the plug and the pin insert in the receptacle and shall be terminated with maximum OD wire specified in table II. Backshell hardware shall be the same as group 1. If more than one contact retention system is to be qualified, a minimum of two connectors of each retention system shall be subjected to each test fluid.

SAE AS50151

4.3.2.7.6 Group 6 (front and rear release connector intermateability):

If requested by the qualifying activity, one connector with insert arrangements of class D, K, L, W, and U in each shell size range and of each release system combination (one male plug with front release mated to female receptacle with rear release, one male plug with rear release mated to female receptacle with front release, one female plug with front release mated to male receptacle with rear release and one female plug with rear release mated to male receptacle with front release) shall pass the group 6 tests of table VII. Backshell hardware shall be the same as group 1 and the receptacles shall be wall mounting.

4.3.2.7.7 Group 7 (class D only):

Two complete connector assemblies, class D wall mounting receptacles and straight plugs, each with insert arrangements with the greatest number of contacts in each shell size range shall pass the tests of table VII, group 7. One sample shall have the pin insert in the plug and the socket insert in the receptacle. The other sample shall have the socket insert in the plug and the pin insert in the receptacle. One connector shall be assembled with a MIL-C-85049/11 type B cable backshell and 6 feet of the applicable cable specified in table VIII. The remaining connector shall be assembled with an SAE-AS31091 boot and 6 feet of the applicable cable specified in table VIII.

- a. For the shell size range submitted, all shell sizes and styles within those ranges.
- b. For the service ratings submitted, all contact arrangements complying with those service ratings.

TABLE VIII. Test cable size. 1, 2

M85049/11 Backshell Dash Number	SAE-AS31091 Boot Dash Number (Type B)	MIL-DTL-5015 Shell Size	Cable OD Max
07/08	11	8S	0.432
11/12	12	10S/10SL	0.432
13/14	13	12/12S	0.432
116/117	13	14/14S	0.432
21/22	14	16/16S	0.700
27/28	14	18	0.750

SAE AS50151

TABLE VIII. Test cable size - Continued. 1/, 2/

M85049/11 Backshell Dash Number	SAE-AS31091 Boot Dash Number (Type B)	MIL-DTL-5015 Shell Size	Cable OD Max
33/34	15	20	0.750
41/42	15	22	0.750
47/48	16	24	0.750
55/56	16	28	0.750
65/66	17	32	1.250
71/72	17	36	1.250
79/80	18	40	1.250
87/88	18	44	1.250
95/96	18	48	1.250

1/ Select type to match maximum cable entry and insert configuration of MIL-DTL-5015.

2/ No armor to be used on test cable.

4.3.3 Qualification rejection:

There shall be no failures during any examination or tests of the connectors or accessories submitted for qualification tests. After notification of any failure, the agent responsible for qualification testing (see 6.14) shall receive details of corrective action from the manufacturer before initiating any further tests deemed necessary to ensure compliance with connector requirements.

4.4 Conformance inspection:

4.4.1 Inspection of product for delivery:

Inspection of product for delivery shall consist of group A inspection.

4.4.2 Group A inspection:

Group A inspection shall consist of all of the applicable tests specified in table IX.

SAE AS50151

TABLE IX. Group A inspection.

Inspection <u>1/</u>	Requirement paragraph	Test paragraph
Visual and mechanical	3.1, 3.3, 3.4, 3.5, 3.30, and 3.31	4.6.1
Air leakage (for class H only) <u>2/</u>	3.9.2	4.6.5.2
Dielectric withstanding voltage <u>2/</u> , <u>3/</u>	3.11	4.6.7.5
Insulation resistance <u>2/</u> , <u>3/</u>	3.18.1	4.6.14.2

1/ 100 percent inspection.

2/ The contractor is permitted to use in-process controls for this requirement.

3/ Crimp contact connectors only.

4.5 Periodic inspection:

Periodic inspection shall consist of group B. Except where the results of these inspections show noncompliance with the applicable requirements (see 4.5.1.4), delivery of products which have passed group A shall not be delayed pending the results of these periodic inspections.

4.5.1 Group B inspection:

Group B inspection shall consist of the tests specified in table X in the order shown. Group B inspection shall be made on sample units selected from inspection lots which have passed the Group A inspection.

TABLE X. Group B inspection.

Inspection	Requirement Paragraph	Test Paragraph	Group					
			1	2	3	4	5	6
Insulation resistance	3.18	4.6.14	X	X	X	X	--	--
Dielectric withstanding voltage	3.11	4.6.7.2	X	X	X	X	--	--
Contact retention	3.10	4.6.6	X	X	--	--	X	X
Shell conductivity	3.27	4.6.23	--	--	--	--	X	X
Air leakage	3.9.1	4.6.5.1	X	--	--	X	--	--
Durability	3.16	4.6.12	--	X	--	X	--	X
Moisture resistance (except classes A, B, C, and K only)	3.22	4.6.18	X	--	X	--	X	--

TABLE X. Group B inspection - Continued.

Inspection	Requirement	Test	Group
------------	-------------	------	-------

SAE AS50151

	paragraph	Paragraph	1	2	3	4	5	6
Humidity (classes A, B, C, and K only)	3.14	4.6.10	X	--	--	--	--	--
Water pressure (series II only)	3.23.1	4.6.19.1	--	--	--	--	X	--
Altitude immersion (series III only)	3.29	4.6.25	--	--	--	--	X	--
Corrosion	3.17	4.6.13	--	X	--	X	--	X

4.5.1.1 Sampling plan:

Every 24 months, mated connector sample units which have passed group A inspection shall pass the tests specified in table X. Samples shall be selected to provide two samples per applicable test group, as determined by the contact type and the class of the samples to be tested.

4.5.1.1.1 Solder contact connectors (class A, B, C, E, F, K, P, and R):

Samples and tests for solder contact connectors shall consist of four mating plugs and receptacles in various shell sizes and classes representing a cross section of production. Plugs and receptacles of different classes are permitted to be mated. The samples shall be wired as specified in 4.3.2.1. Two complete mating connector assemblies shall pass the tests of table X, group 1 and the other two assemblies shall pass the tests of table X, group 2.

4.5.1.1.2 Solder contact connectors (class H):

Samples and tests for solder contact connectors shall consist of four receptacles with mating plugs in various shell sizes representing a cross section of production. Two complete mating connector assemblies shall be wired as specified in 4.3.2.1 and pass the tests of table X, group 3. The remaining two assemblies need not be wired but shall pass the tests of table X, group 4.

4.5.1.1.3 Crimp contact connectors:

Samples and tests for crimp contact connectors shall consist of four mating plugs and receptacles in various shell sizes and classes representing a cross section of production. Plugs and receptacles of different classes are allowed to be mated. The samples shall be wired as specified in 4.3.2.1. Two complete mating connector assemblies shall pass the tests of table X group 5, and the other two assemblies shall pass the tests of table X, group 6.

SAE AS50151

4.5.1.1.4 Solder socket contacts:

Samples and tests for solder socket contacts shall be as specified in 4.3.2.6.

4.5.1.2 Failures:

If one or more sample units fail to pass group B inspection, the sample shall be considered to have failed.

4.5.1.3 Disposition of sample units:

Sample units which have been subjected to group B inspection shall not be delivered on the contract or purchase order.

4.6 Methods of examination and tests:

4.6.1 Visual and mechanical examination:

The connectors, accessories, and piece parts shall be visually and mechanically examined to ensure conformance with 3.1, 3.3, 3.4, 3.5, 3.30, and 3.31. The use of in process controls to examine component parts, unrelated to lot sizes of finished connectors, is permitted in lieu of examination of these components in the finished connectors to ensure conformance of these component parts.

4.6.2 Magnetic permeability:

The relative permeability shall be checked with an indicator conforming to ASTM-A342. The connectors or accessories are permitted to be wired or unwired, as convenient, but shall not carry current (see 3.6).

4.6.3 Disengagement (MS3107, MS3507):

The plug (without the insert) shall be fully mated to a mounted receptacle. An increasing axial tension shall be applied to the plug and the force at separation measured (see 3.7).

4.6.4 Temperature cycling (thermal shock):

Accessories or unmated connectors shall be tested in accordance with MIL-STD-1344, Method 1003, Test Condition A, except that the temperature extremes shall be as specified in table XI. At the completion of the last cycle, the connectors shall be returned to room temperature for inspection (see 3.8).

SAE AS50151

TABLE XI. Temperature extremes.

Class	Temperature		
	Extremes	Degrees C	Degrees F
A, B, C, E, F, P, R	Low	-55 +0 -3	-67 +0 -5
	High	+125 +3 -0	+257 +5 -0
D, H, K, W	Low	-55 +0 -3	-67 +0 -5
	High	+175 +3 -0	+347 +5 -0
L, U	Low	-55 +0 -3	-67 +0 -5
	High	+200 +3 -0	+392 +5 -0

4.6.5 Air leakage tests:

4.6.5.1 Solder contact receptacles (except class A, B, H, and P):

The connector shall be tested for air leakage in accordance with MIL-STD-1344, Method 1008. The pressure differential across the connector shall be 30 lb/in². The leakage rates shall be measured in both directions while at the low temperature extremes of table XI (see 3.9.1).

4.6.5.2 Class H receptacles:

All class H receptacles shall be mounted in a manner which will allow for the application of 15 lb/in² nominal pressure differential across the receptacles and tested in accordance with MIL-STD-1344, Method 1008. The leakage rate shall be determined while pressurized air or gas, containing not less than 10 percent of helium by volume, is applied to the receptacle (see 3.9.2).

4.6.6 Contact retention:

Axial loads in accordance with table XII shall be applied to the mating end of the individual contacts. The connector shall have all contacts in place during the test in accordance with MIL-STD-1344, Method 2007 (see 3.10).

SAE AS50151

TABLE XII. Contact retention axial loads.

Contact mating end size	Minimum axial load (pounds)		
	Fixed type contacts	Removable crimp type contact, except class D	Class D
16	10	25	50
12	15	30	50
8	20	50	80
4	20	60	100
0	25	75	100

4.6.6.1 Solder contact connectors:

Connectors shall be tested as specified in 4.6.6. The measurement of the displacement of the contacts is not required (see 3.10).

4.6.7 Dielectric withstanding voltage (see 3.11):

4.6.7.1 Dielectric withstanding voltage (sea level, solder contacts only):

Wired, unmated connectors shall be tested in accordance with MIL-STD-1344, Method 3001, with the following details and exceptions:

- a. The magnitude of the test voltage shall be as specified in table XIII. (For maximum recommended working voltages, see 6.1.2).
- b. Fifty percent of the contacts available shall be tested, but in no case shall less than six dielectric withstanding voltage readings be taken. If the number of contacts is three or less, all contacts shall be tested. The test voltage shall be applied between each wired contact and each adjacent contact and the shell.
- c. For acceptance testing, simulated contacts and special techniques are permitted to be used in performing this test.

SAE AS50151

TABLE XIII. Dielectric withstanding test voltages.

Service rating	Test voltage (volts-rms)	
	Sea level	70,000 ft
Instrument	1000	260
A	2000	360
D	2800	400
E	3500	440
B	4500	480
C	7000	560

4.6.7.2 Dielectric withstanding voltage (sea level, crimp contact connectors only):

Mated or unmated connectors, as required, shall be tested in accordance with MIL-STD-1344, Method 3001. Fifty percent of the contacts shall be tested, but in no case shall less than six dielectric withstanding voltage readings be taken. If the number of contacts is three or less, all contacts shall be tested. The test voltage shall be applied between each wired contact and each adjacent contact and the shell. If an insert has more than one service rating, similar connections shall be made for the different test voltages as needed.

4.6.7.3 Dielectric withstanding voltage (altitude):

Mated connectors and unmated connector halves with pin contacts shall be tested in accordance with MIL-STD-1344, Method 3001, with the following details and exceptions:

- a. The magnitude of the test voltage shall be as specified in table XIII.
- b. Fifty percent of the contacts available shall be tested, but in no case shall less than six dielectric withstanding voltage readings be taken. If the number of contacts is three or less, all contacts shall be tested. The test voltage shall be applied between each wired contact and each adjacent contact and the shell.
- c. The leads of all test circuits shall be brought out through the walls of the chamber. There shall be no wire splices inside the chamber. The wire ends of all leads shall be unsealed.
- d. Only the engaging faces of class H connectors shall be subjected to the high altitude. The rear face shall be protected.

SAE AS50151

4.6.7.4 Dielectric withstanding voltage (after humidity at sea level):

The mated connectors shall show no evidence of breakdown when the voltage indicated for the applicable service rating in table III is applied between the two closest contacts and between the shell and the contacts closest to the shell in accordance with MIL-STD-1344, Method 3001, except the test voltage shall be applied for 5 minutes (see 3.11).

4.6.7.5 Dielectric withstanding voltage (group A inspection at sea level):

Unmated connectors or insert assemblies shall show no evidence of breakdown when the applicable test voltage of table XIII is applied between the two closest contacts, and between the shell (or simulated shell) and the contact closest to the shell in accordance with MIL-STD-1344, Method 3001. The period of application of voltage shall be two seconds minimum and simulated contacts are permitted to be used.

4.6.8 Vibration:

Complete mated connectors shall be mounted and pass the applicable vibration test. Each receptacle shall be mounted on a fixture, which, in turn, shall be attached to a vibration table. A sensor shall monitor the vibration of the receptacle at a point on or near the receptacle. A counterpart plug shall be engaged with the receptacle and be attached without the use of safety wire. The wire bundles or cables shall be clamped to nonvibrating points at least 8 inches from the rear of the connectors. The clamping length shall be chosen to avoid resonance of the wire bundles or cables. All contacts shall be wired in a series circuit, and a current that shall be not greater than 100 milliamperes shall flow through the series circuit during the test. An instrument shall be employed to monitor the current flow and to indicate discontinuity of contact or interruption of current flow (see 3.12).

4.6.8.1 Sine vibration (solder contact connectors only):

The mated connector shall be mounted as specified in 4.6.8 and vibrated in accordance with MIL-STD-1344, Method 2001, test condition II.

4.6.8.2 Sine vibration (series II only):

Mated connectors shall be mounted as specified in 4.6.8 and tested in accordance with MIL-STD-1344, Method 2005, test condition III, and also in accordance with the endurance test of MIL-STD-167-1.

4.6.8.3 Random vibration (series III only):

Wired, mated connectors shall be tested in accordance with to MIL-STD-1344, Method 2005. The following details shall apply:

- a. The connector shall be mounted on the table.

SAE AS50151

4.6.8.3 (Continued):

- b. Test condition VI - letter J.
- c. The duration of test shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction.

4.6.9 Shock (see 3.13):

4.6.9.1 Shock (except class D connectors):

Mated connectors shall be tested in accordance with MIL-STD-1344, Method 2004, test condition A. Connectors shall be mounted and mated. All contacts shall be wired in a series circuit with a current that shall be not greater than 100 milliamps. The wire bundles or cables shall be clamped to structures that move with the connectors. A minimum of 8 inches of wire or cable shall be unsupported behind the rear of each connector.

4.6.9.2 High impact shock (class D connectors):

Complete mated connectors with MIL-C-85049/11 backshells or SAE-AS31091 boots with 6 feet of unarmored cable (see table VIII) installed shall be tested in accordance with MIL-S-901, Grade A. Mounting fixtures shall be in accordance with MIL-S-901, lightweight. All contacts shall be wired in a series circuit with a current that shall be not greater than 100 milliamps flowing through the series circuit during the high impact shock. A device shall be used to monitor the current flow and to indicate any discontinuity which exceeds 10 microseconds interruption of current flow. The mated connectors shall be held together only by the locking device. Cable or wires shall be supported on a stationary frame not closer than 36 inches from the connector assembly.

4.6.10 Humidity:

Mated connectors shall be exposed to a relative humidity in accordance with MIL-STD-1344, Method 1002, type 1, at a room temperature of 71 ± 2 °C for 14 days. Immediately after exposure, without any forced drying, conduct the dielectric withstanding voltage test of 4.6.7.4. Class H receptacles and MS3102 receptacles shall have their rear portion enclosed and not exposed to humidity (see 3.14).

4.6.11 Contact resistance:

The contact resistance shall be measured in accordance with MIL-STD-1344, Method 3004. Solder contact connectors shall be tested with the coupling ring removed (see 3.15 and 4.6.13.3).

SAE AS50151

4.6.12 Durability:

Counterpart connectors shall be mated and unmated 100 times at a rate that shall not be greater than 60 cycles per hour in accordance with MIL-STD-1344, Method 2016 (see 3.16).

4.6.13 Corrosion:

Unmated connectors and individual contact samples shall be tested in accordance with MIL-STD-1344, Method 1001. The samples shall not be mounted but suspended from the top of the chamber using waxed twine, string, glass rods, or glass cord. Wire ends shall be protected to prevent salt migration. The details and exceptions of this test shall be as specified in 4.6.13.1, 4.6.13.2, and 4.6.13.3 (see 3.17).

4.6.13.1 Corrosion (class A, B, C, E, F, P, R, and class H and MS3100 series class K ferrous alloy connectors):

Test condition letter B.

4.6.13.2 Corrosion (series II and series III class K ferrous alloy connectors and class L and U aluminum connectors):

Test condition letter A. The connectors shall be subjected to the salt spray test for 48 hours mated followed by 48 hours unmated.

4.6.13.3 Dynamic corrosion (classes D, W, and DJ and class H, K, L, and U stainless steel connectors):

Test condition letter D. The plugs and receptacles shall be mated and unmated 50 cycles at a rate that shall be not greater than 300 cycles per hour. The mating and unmating shall be accomplished so that the plugs and receptacles are completely separated during each cycle. The connectors shall then be subjected to the salt spray test for 952 hours mated, followed by 48 hours unmated. After salt spray exposure, the remaining number of durability cycles specified in 4.6.12 shall be completed.

4.6.14 Insulation resistance:

4.6.14.1 Insulation resistance at room temperature (see 3.18.1):

Unmated connectors shall be tested in accordance with MIL-STD-1344, Method 3003. The following details and exceptions shall apply:

- a. For lot acceptance testing simulated contacts and special techniques, as approved by the qualifying activity (see 6.2), are permitted to be used in performing this test.
- b. The tolerance on the applied voltage shall be ± 10 percent.

SAE AS50151

4.6.14.2 Insulation resistance at room temperature (group A):

Insulation resistance shall be measured in accordance with 4.6.14.1 between at least two closest adjacent contacts, and between the shell and at least one contact closest to shell. Simulated contacts and shells are permitted to be used (see 3.18.1).

4.6.14.3 Insulation resistance at elevated temperature (short time):

The insulation resistance shall be measured in accordance with 4.6.14.1 except that the connectors shall have been exposed to an ambient temperature of 125 °C (257 °F) for 60 hours. After completion of the 60 hours and while at the 125 °C temperature, measurements shall be made. During the duration of the test sequence, and while at the 125 °C temperature measurements shall be made at least two times. The interval between each series of measurements shall be not less than 24 hours (see 3.18.2).

4.6.14.4 Insulation resistance at elevated temperature (long time):

The insulation resistance shall be measured in accordance with 4.6.14.1. Elevated temperatures and required minimum insulation resistances are specified in table XIV. All measurements shall be made at the end of 1,000 hours while the connectors are at the elevated temperature (see 3.18.3).

TABLE XIV. Insulation resistance at elevated temperature (long time).

Class of connector	Minimum insulation resistance (megohms)	Test temperature
		+5 °C (41 °F) -0 °C (32 °F)
A, B, C, E, F, P, and R	30	85 °C (185 °F)
H	50	175 °C (347 °F)
K	100	175 °C (347 °F)
L, D, U, and W	1000	200 °C (392 °F)

4.6.15 Fluid immersion (see 3.19):

4.6.15.1 Limited capabilities (class A, B, C, E, F, P, and R):

Unmated connectors shall be fully immersed in the fluids specified below for the required periods. At least one connector with its mating counterpart shall be immersed in each fluid. After removal from the fluid, each connector shall remain for 1 hour in air at room conditions. Connectors shall be fully mated with mating connectors that were immersed simultaneously in the same fluid.

- a. Hydraulic fluid conforming to MIL-H-5606 – 20 hours.
- b. Lubricating oil conforming to MIL-PRF-7808 – 20 hours.

SAE AS50151

4.6.15.2 Complete capabilities (class, D, K, L, H, U, and W):

Connector samples shall be tested in accordance with MIL-STD-1344, Method 1016 (one sample per fluid). Following the fluid immersion cycles, the connector shall be visually examined at 3X magnification for cracks and tears and shall be mated by hand.

4.6.16 Firewall (class K conductors):

The mated, torqued, and wired connectors shall be tested in accordance with MIL-STD-1344, Method 1009 (see 3.20). The wire bundles shall be clamped to fixed points at least 8 inches behind the connectors. Test currents shall be as specified in table XV.

TABLE XV. Firewall test currents.

Contact size		DC test current (amperes)
Mating end	Wire barrel end	
16	16	22
12	12	41
8	8	73
4	4	135
0	0	245

4.6.17 Insert retention:

Unmated connectors shall be tested in accordance with MIL-STD-1344, Method 2010 (see 3.21). The maximum pressure shall be as specified in table XVI.

TABLE XVI. Insert retention test pressures.

Shell size	Test pressure (psi gage)	
	All classes except H	Class H
8 through 12	150	200
14 through 18	100	
20 through 22	75	
24 through 28	60	
32 through 40	45	
44 through 48	30	

4.6.18 Moisture resistance:

Moisture resistance test specimens shall be subjected to the high humidity (see 4.6.18.1) or extreme humidity range (see 4.6.18.2) moisture tests, as applicable. The connectors shall be wired and mated to the counterpart connectors. They shall be mounted horizontally with the wires descending into the backshell with no drip loops or splices within the chamber. The wires shall leave the chamber through vapor tight seals. Connectors without rear seal grommets shall have their terminals protected (see 3.22). Prior to the beginning of the test and at the end of the test period and while at the high humidity, the insulation resistance between each contact and other contacts shall be determined as specified in of MIL-STD-1344, Method 3003.

4.6.18.1 Moisture resistance at high humidity (crimp contact connectors):

Wired, mated connectors shall be tested in accordance with MIL-STD-1344, Method 1002. The following details and exceptions shall apply:

- a. Test procedure – type II.
- b. The mated connectors shall be mounted in a vertical position.
- c. Step 7a shall be performed during the last cycle.
- d. Three hours minimum after the start of step 7a, during the final cycle and while the connectors are still subjected to high humidity, the insulation resistance shall be measured when the chamber temperature reaches 20 ± 5 °C (68 ± 9 °F) and condensation is observed on the connector.
- e. For qualification testing, insulation resistance readings shall be made on a minimum of 50 percent of the circuits.

4.6.18.2 Moisture resistance, extreme humidity range (solder contact connectors):

Mated solder contact connectors shall be subjected to the following test. The test chamber shall consist of a box 12 inches deep by 16 inches wide by 24 inches long, capable of being sealed, and shall be constructed of materials that, in the presence of water, do not affect deterioration of the samples. An open screen tray shall be provided to support the test specimens 8 inches below the top of the box. Provisions shall be made to bring out wires for measurement purposes through vapor tight seals near the top of the box. Controls shall be provided that will cause the chamber air temperature to vary 5 °C (9 °F) once each hour for 20 days, from any temperature between 22 and 28 °C (72 and 82 °F) causing heavy condensation to form on the samples once each hour. The bottom of the test chamber shall be covered with 1/4 inch of tap water to start the test. The heat application to supply the temperature variation shall be radiant in nature and applied to the underside of the test chamber.