

REV.
A

AS5198

FEDERAL SUPPLY CLASS
4730

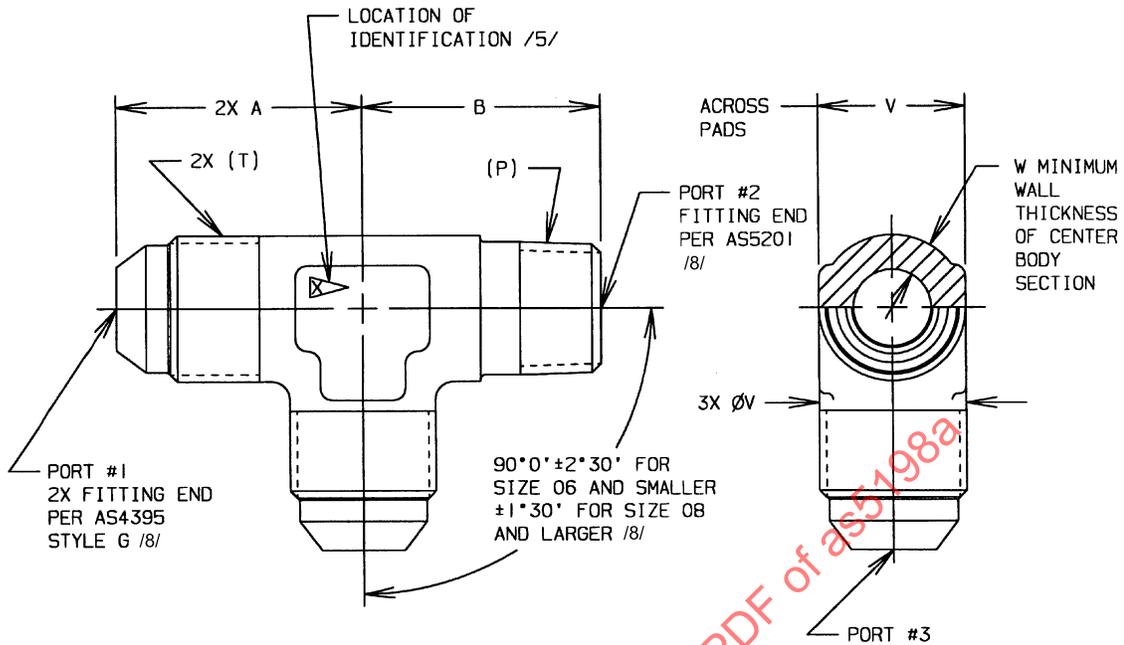



FIGURE 1 - FITTING, TEE

TABLE 1 - DIMENSIONS

BASIC NO. AS5198 /16/ SIZE CODE	(NOMINAL TUBE SIZE) PORT #1 & #3	(NOMINAL PIPE SIZE) PORT #2	P THREAD PER AS71051 ANPT	T THREAD PER AS8879 CLASS 3A	PORT #2 STYLE	A	B
020202	.125	.125	1/8-27	.3125-24 UNJF	B	.758	.712
030203	.188	.125	1/8-27	.3750-24 UNJF	B	.821	.712
040204	.250	.125	1/8-27	.4375-20 UNJF	C	.883	.774
050205	.312	.125	1/8-27	.5000-20 UNJF	C	.946	.774
060406	.375	.250	1/4-18	.5625-18 UNJF	A	1.055	1.086
080608	.500	.375	3/8-18	.7500-16 UNJF	C	1.243	1.212
100810	.625	.500	1/2-14	.8750-14 UNJF	C	1.446	1.462
121212	.750	.750	3/4-14	1.0625-12 UNJ	A	1.646	1.586
161216	1.000	.750	3/4-14	1.3125-12 UNJ	C	1.805	1.712
161616	1.000	1.000	1-11 1/2	1.3125-12 UNJ	A	1.805	1.962
201620	1.250	1.000	1-11 1/2	1.6250-12 UNJ	C	2.055	2.118
202020	1.250	1.250	1 1/4-11 1/2	1.6250-12 UNJ	B	2.055	2.368
242024	1.500	1.250	1 1/4-11 1/2	1.8750-12 UNJ	C	2.321	2.493
282428	1.750	1.500	1 1/2-11 1/2	2.2500-12 UNJ	C	2.805	2.774
323232	2.000	2.000	2-11 1/2	2.5000-12 UNJ	C	3.055	2.993

INACTIVE IN PART - SEE NOTE /17/

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4842/1

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

(R)

FITTING, TEE, FLARED
TO PIPE ON RUN

AS5198
SHEET 1 OF 3

REV.
A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REVISED 2000-10
ISSUED 1999-04

REV.
A

AS5198

TABLE 1A - DIMENSIONS AND WEIGHTS

BASIC NO. AS5198 /16/ SIZE CODE	V	W	LB/EA APPROX REF AL	LB/EA APPROX REF CU	LB/EA APPROX REF STEEL
020202	.297- .314	.090	.0119	.0360	.0340
030203	.360- .377	.100	.0165	.0501	.0473
040204	.423- .440	.110	.0223	.0677	.0640
050205	.485- .502	.120	.0287	.0871	.0824
060406	.547- .565	.120	.0410	.125	.118
080608	.735- .753	.150	.0815	.248	.234
100810	.860- .878	.170	.124	.376	.356
121212	1.047-1.065	.185	.193	.585	.553
161216	1.292-1.317	.205	.297	.900	.852
161616	1.292-1.317	.205	.294	.895	.845
201620	1.605-1.630	.240	.539	1.64	1.55
202020	1.605-1.630	.240	.478	1.45	1.37
242024	1.855-1.880	.250	.707	2.15	2.03
282428	2.230-2.260	.350	1.20	3.64	3.44
323232	2.542-2.572	.350	1.79	5.43	5.13

NOTES:

/1/ MATERIAL:

- a. DASH AS CODE LETTER - LOW ALLOY STEEL FORGING OR BAR, TYPE 4130 PER AMS-S-6758 OR AMS 6370, OR TYPE 4140 PER AMS 6382. /2/
- b. CODE LETTER B - TYPE 377 COPPER ALLOY FORGING PER ASTM B 124 OR AMS 4614 OR HALF HARD FORGING OR BAR PER ASTM B 138.
- c. CODE LETTER D - TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS 4134, OR TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6, OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR AMS 4339. /2/ /16/
- d. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5639.
- e. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5648.
- f. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5645.
- g. CODE LETTER W - TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS 4141, OR TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9, OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124. /2/

/2/ HEAT TREATMENT:

- a. DASH AS CODE LETTER - SEE HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- b. CODE LETTERS D AND W - SEE ELECTRICAL CONDUCTIVITY AND HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION. /16/
- c. OTHER CODE LETTERS - NONE.