

AS5310

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

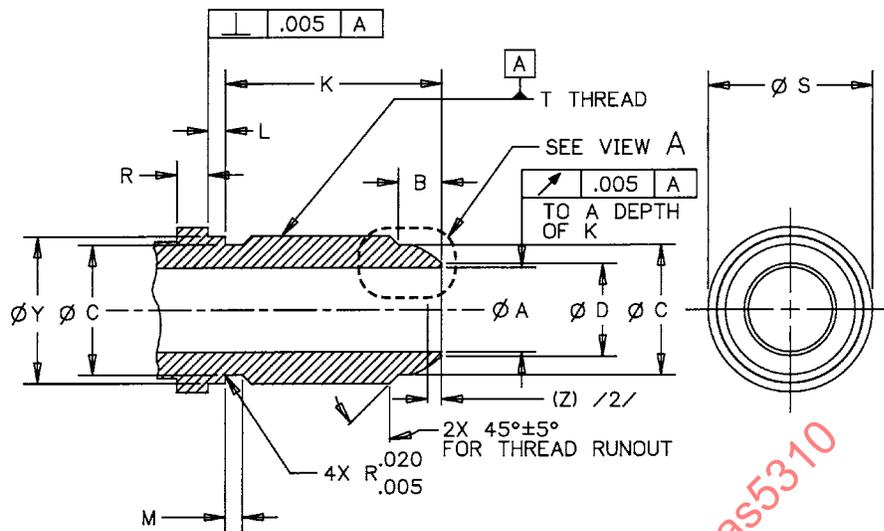


FIGURE 1 - FITTING END, STYLE G


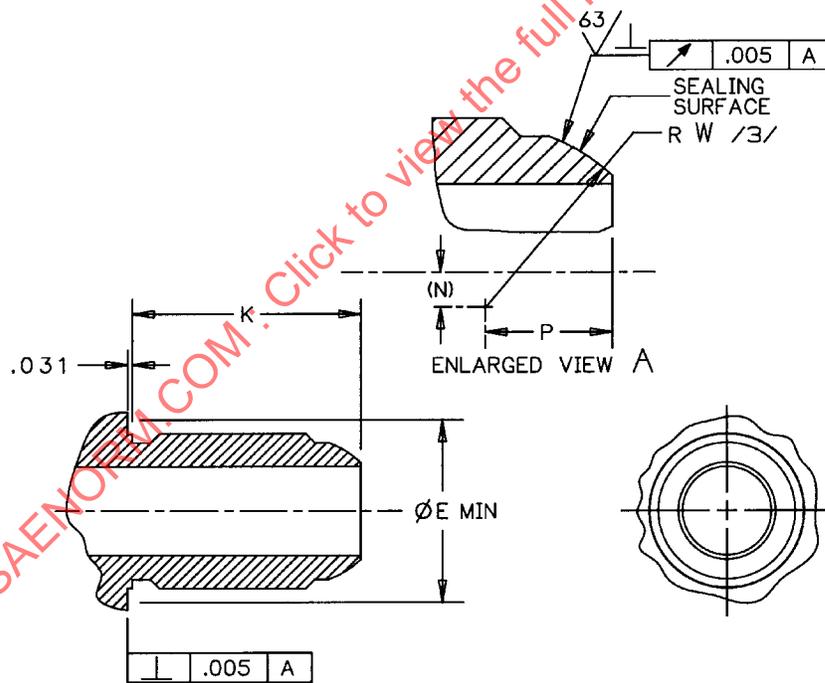


FIGURE 2 - FITTING END, STYLE H
SAME AS STYLE G EXCEPT AS SHOWN

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: NONE /1/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING END, BULKHEAD, SPHERICAL,
37° FLARED TUBE CONNECTION
DESIGN STANDARD

AS5310
SHEET 1 OF 3

AS5310

TABLE 1A - DIMENSIONS A-K

BASIC NO. AS5310 /9/ SIZE CODE	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879	A	B	C	D	E	K ±.016
03	.188	.3750-24 UNJF-3A	.121 - .128	.177	.307	.146	.595	.922
04	.250	.4375-20 UNJF-3A	.168 - .175	.193	.359	.193	.658	1.016
05	.312	.5000-20 UNJF-3A	.230 - .237	.193	.421	.255	.720	1.016
06	.375	.5625-18 UNJF-3A	.293 - .301	.198	.476	.318	.782	1.094
08	.500	.7500-16 UNJF-3A	.387 - .395	.253	.654	.426	.970	1.250
10	.625	.8750-14 UNJF-3A	.480 - .488	.266	.767	.539	1.093	1.391
12	.750	1.0625-12 UNJ -3A	.604 - .614	.315	.938	.664	1.343	1.562
16	1.000	1.3125-12 UNJ -3A	.839 - .851	.315	1.188	.913	1.593	1.562
20	1.250	1.6250-12 UNJ -3A	1.073 - 1.086	.367	1.501	1.147	1.843	1.609
24	1.500	1.8750 - 12 UNJ -3A	1.307 - 1.320	.378	1.750	1.381	2.089	1.625

TABLE 1B - DIMENSIONS L-Z

BASIC NO. AS5310 /9/ SIZE CODE	L ±.016	M +.015 -.000	N	R ±.016	S ±.016	P	W	Y	Z
03	.094	.063	.160	.109	.500	.217	.312	.3678 - .3750	.075
04	.094	.075	.126	.125	.562	.219	.312	.4294 - .4375	.067
05	.094	.075	.096	.125	.625	.217	.312	.4919 - .5000	.064
06	.094	.083	.060	.141	.688	.223	.312	.5538 - .5625	.072
08	.125	.094	.130	.156	.875	.329	.475	.7406 - .7500	.092
10	.125	.107	.074	.172	1.000	.328	.475	.8647 - .8750	.089
12	.125	.125	.124	.188	1.188	.436	.632	1.0511 - 1.0625	.117
16	.125	.125	.000	.188	1.438	.436	.632	1.3011 - 1.3125	.118
20	.125	.125	.000	.188	1.750	.559	.800	1.6136 - 1.6250	.165
24	.125	.125	.000	.188	2.000	.640	.942	1.8636 - 1.8750	.155