

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV.
A**

SAE AS55941/6

FEDERAL SUPPLY CLASS
5930

RATIONALE


THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. DESIGN AUTHORITIES MAY DETERMINE THAT THIS DOCUMENT IS NO LONGER TO BE USED FOR NEW DESIGN. THIS DETERMINATION SHOULD BE MADE BY EACH DESIGN AUTHORITY.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8 AERO ELECTRICAL ELECTRONICS DISTRIBUTION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECT TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as55941_6a

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS55941/6A>

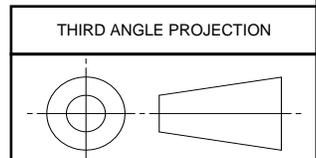

CUSTODIAN: AE-8/AE-8B2

PROCUREMENT SPECIFICATION: MIL-S-5594



AEROSPACE STANDARD
SWITCH, TOGGLE, MAGNETIC HOLD-IN, DP3T
LEVER LOCK

SAE AS55941/6

**REV.
A**

ISSUED 2004-04 STABILIZED 2013-04

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-S-5594/6(AS), NOTICE 1, NOTICE 2 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-S-5594/6(AS), NOTICE 1, NOTICE 2. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as55941_6a

 An SAE International Group	AEROSPACE STANDARD	SAE AS55941/6 SHEET 1 OF 5	REV. A
	SWITCH, TOGGLE, MAGNETIC HOLD-IN, DP3T LEVER LOCK		


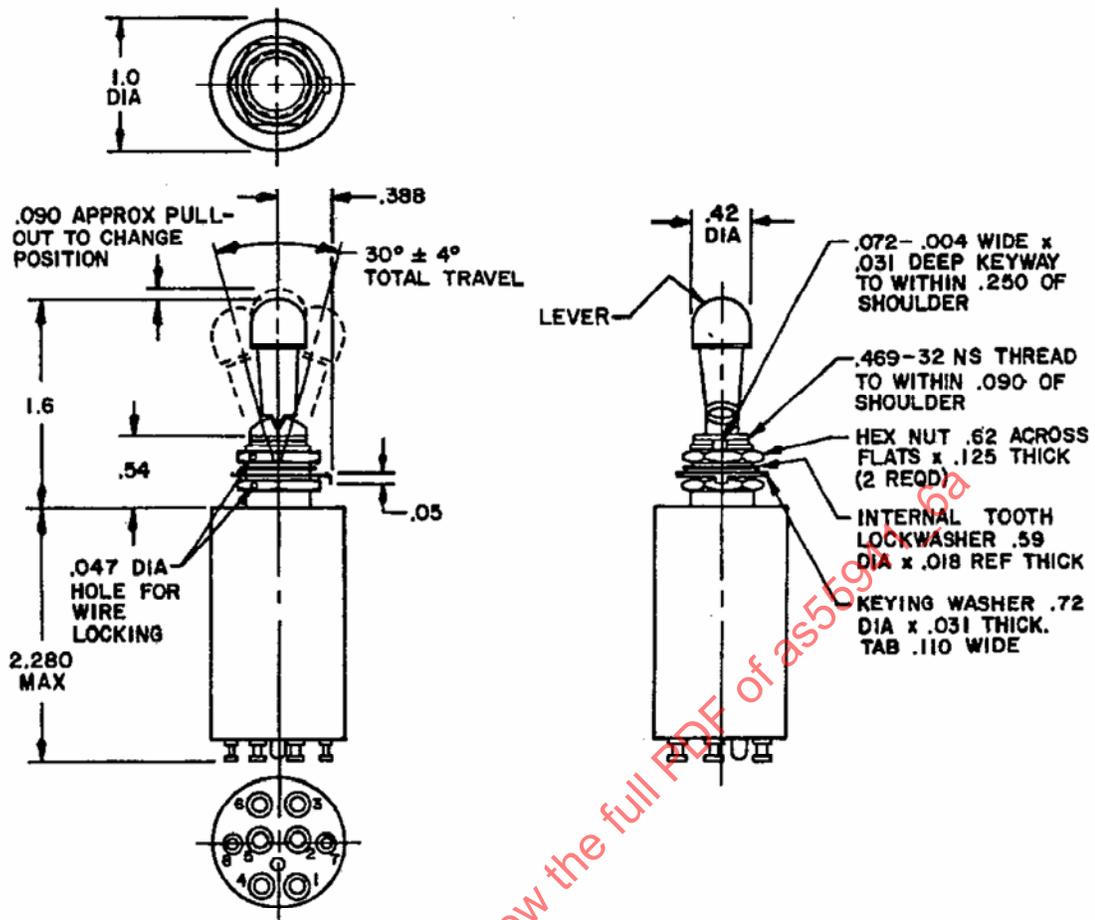


FIGURE 1. SWITCHES.

SAENORM.COM : Click to view the full PDF of as55941/6

SAE Aerospace An SAE International Group	AEROSPACE STANDARD	SAE AS55941/6 SHEET 2 OF 5	REV. A
	SWITCH, TOGGLE, MAGNETIC HOLD-IN, DP3T LEVER LOCK		

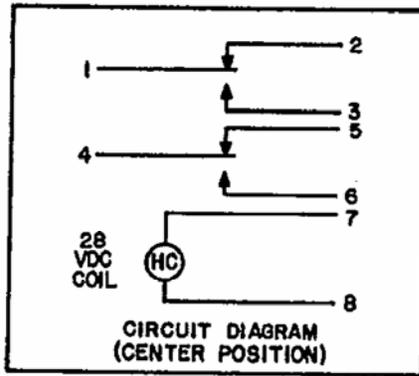

INCHES	MM	INCHES	MM	INCHES	MM
.004	.10	.110	2.79	.59	15.0
.018	.46	.125	3.18	.62	15.7
.031	.79	.250	6.35	.72	18.3
.047	1.19	.388	9.86	1.0	25.4
.05	1.3	.42	10.7	1.6	40.6
.072	1.83	.469	11.91	2.280	57.91
.090	2.29	.54	13.7		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are $\pm .005$ (.13 mm) on three place decimals, $\pm .015$ (.38 mm) on two place decimals, and $\pm .030$ (.76 mm) on one place decimals.
4. Energizing the coil will not cause transfer of circuits.
5. Locking arrangement: Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.

FIGURE 1. SWITCHES - CONTINUED.