


RATIONALE

THIS STANDARD WAS PREPARED TO PROVIDE AN ENVELOPE REQUIREMENTS FOR AN AXIALLY SWAGED, FIELD ATTACHABLE, 5000 PSI, TUBE FITTING.

AS5868


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

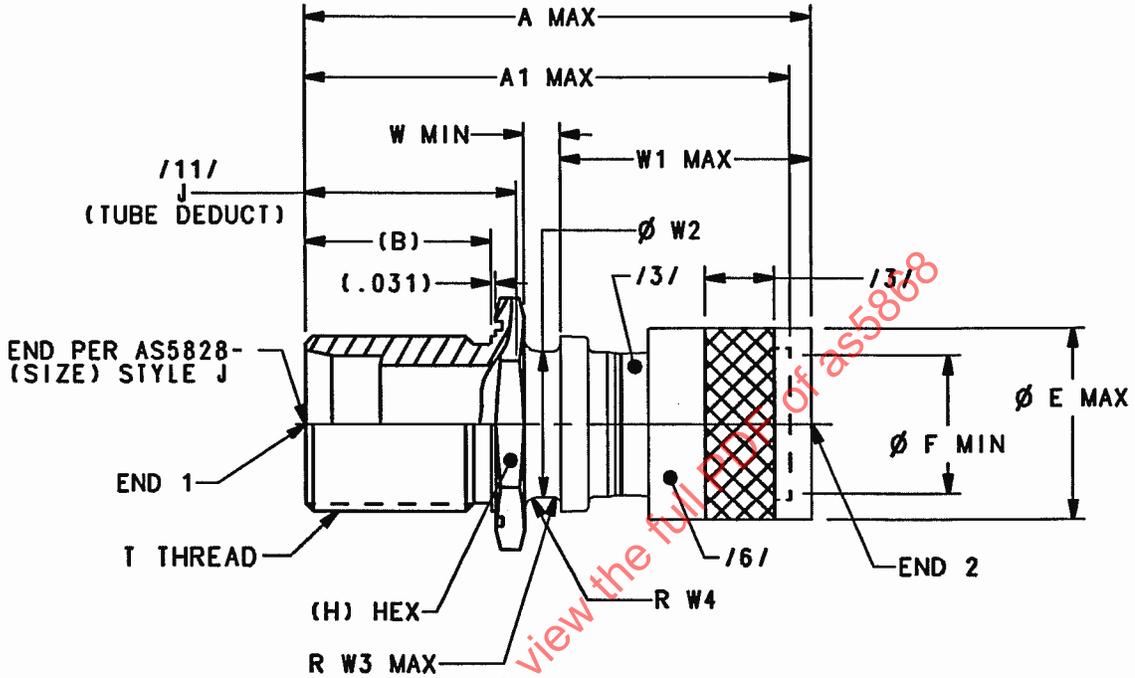

(SEE TABLE 1A AND 1B FOR DIMENSIONAL INFORMATION)

FIGURE 1 - ADAPTER, SWAGE

SAENORM.COM Click to view the full text of as5868

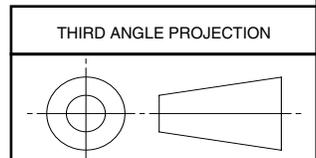

ISSUED 2006-01

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS5958

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
FITTING ASSEMBLY, ADAPTER,
BULKHEAD FLARELESS, AXIALLY SWAGED,
HYDRAULIC, 5080 PSI

AS5868
SHEET 1 OF 3

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

AS5868

TABLE 1A - DIMENSIONS A THROUGH J

BASIC NO. AS5868 /13/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	A	A1	(B)	E	F	(H)	J /11/ TUBE DUCT
0404	.2500	.2500	1.857	1.770	.938	.466	.253	.812	1.275 ±.150
0604	.3750	.2500	1.923	1.836	.984	.466	.253	1.000	1.341 ±.150
0406	.2500	.3750	2.094	1.978	.938	.609	.378	1.000	1.295 ±.150
0606	.3750	.3750	2.140	2.024	.984	.609	.378	1.000	1.341 ±.150
0806	.5000	.3750	2.296	2.180	1.125	.609	.378	1.125	1.497 ±.150
0608	.3750	.5000	2.363	2.217	.984	.783	.504	1.125	1.364 ±.175
0808	.5000	.5000	2.504	2.358	1.125	.783	.504	1.125	1.505 ±.175
1008	.6250	.5000	2.660	2.514	1.266	.783	.504	1.250	1.661 ±.175
0810	.5000	.6250	2.813	2.609	1.125	.939	.629	1.250	1.520 ±.175
1010	.6250	.6250	2.954	2.750	1.266	.939	.629	1.250	1.661 ±.175
1210	.7500	.6250	3.083	2.879	1.375	.939	.629	1.438	1.790 ±.175
1012	.6250	.7500	3.125	2.920	1.266	1.122	.754	1.438	1.688 ±.175
1212	.7500	.7500	3.234	3.029	1.375	1.122	.754	1.438	1.797 ±.175
1612	1.0000	.7500	3.234	3.029	1.375	1.122	.754	2.125	1.797 ±.175
1216	.7500	1.0000	3.532	3.318	1.375	1.495	1.004	2.125	1.804 ±.200
1616	1.0000	1.0000	3.532	3.318	1.375	1.495	1.004	2.125	1.804 ±.200

TABLE 1B - DIMENSIONS W THROUGH W4 AND WEIGHTS

BASIC NO. AS5975 /13/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	T THREAD PER AS8879	W	W1	W2	W3	W4	AS568 O'RING /12/	MAX WEIGHT LBS/EA
0404	.2500	.2500	.4375-28UNJEF-3A	.123	.488	.3005	.018	.065	-15	.047
0604	.3750	.2500	.5625-24UNJEF-3A	.123	.488	.3005	.018	.065	-17	.055
0406	.2500	.3750	.4375-28UNJEF-3A	.153	.675	.4475	.033	.065	-17	.056
0606	.3750	.3750	.5625-24UNJEF-3A	.153	.675	.4475	.033	.065	-17	.064
0806	.5000	.3750	.7500-20UNJEF-3A	.153	.675	.4475	.033	.065	-20	.070
0608	.3750	.5000	.5625-24UNJEF-3A	.165	.871	.5945	.033	.129	-20	.080
0808	.5000	.5000	.7500-20UNJEF-3A	.165	.871	.5945	.033	.129	-20	.086
1008	.6250	.5000	.8750-20UNJEF-3A	.165	.871	.5945	.033	.129	-22	.102
0810	.5000	.6250	.7500-20UNJEF-3A	.140	1.190	.7365	.021	.078	-22	.107
1010	.6250	.6250	.8750-20UNJEF-3A	.140	1.190	.7365	.021	.078	-22	.123
1210	.7500	.6250	1.0625-18UNJEF-3A	.140	1.190	.7365	.021	.078	-25	.126
1012	.6250	.7500	.8750-20UNJEF-3A	.154	1.327	.8805	.024	.089	-25	.154
1212	.7500	.7500	1.0625-18UNJEF-3A	.154	1.327	.8805	.024	.089	-25	.157
1612	1.0000	.7500	1.3125-16UNJ-3A	.154	1.327	.8805	.024	.089	-30	.197
1216	.7500	1.0000	1.0625-18UNJEF-3A	.167	1.612	1.1725	.027	.099	-30	.254
1616	1.0000	1.0000	1.3125-16UNJ-3A	.167	1.612	1.1725	.027	.099	-30	.324

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING ASSEMBLY, ADAPTER,
BULKHEAD FLARELESS, AXIALLY SWAGED,
HYDRAULIC, 5080 PSI

AS5868
SHEET 2 OF 3