

Standard Test Method for Aerodynamic Acceptance of
SAE AMS 1424 and SAE AMS 1428 Aircraft Deicing/Anti-icing Fluids

TABLE OF CONTENTS

1. SCOPE	5
1.1 Objective	5
1.2 Fluid Acceptance and Facility/Site Qualification	5
1.3 Safety Hazards	5
1.4 Significance in Use	6
2. REFERENCES	6
2.1 Applicable Documents	6
2.1.1 SAE Publications	6
2.1.2 ASTM Publications	6
2.1.3 Reference Fluid	7
2.1.4 Other Publications	7
2.2 Glossary	7
2.2.1 Abbreviations	7
2.2.2 Parameters	8
3. TEST FACILITY REQUIREMENTS	8
3.1 Test Duct Description	8
3.1.1 Dimensions	8
3.1.2 Tolerances	9
3.1.3 Design Features	9
3.2 Test Duct Gas Flow Core Characteristics	9
3.2.1 Test Gas	9
3.2.2 Temperature Range	9
3.2.3 Temperature Stability	9

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2003 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: custsvc@sae.org
SAE WEB ADDRESS: <http://www.sae.org>

SAE AS5900 Revision A

TABLE OF CONTENTS (Continued)

3.2.4	Temperature Spatial Uniformity	9
3.2.5	Velocity Range	9
3.2.6	Turbulence	10
3.2.7	Velocity Spatial Uniformity.....	10
3.2.8	Relative Humidity	10
3.3	Test Facility Thermal Stability.....	10
3.3.1	Test Duct	10
3.3.2	Test Facility	10
3.4	Test Facility Drainage.....	10
3.5	Instrumentation	10
3.5.1	Temperature and Relative Humidity	10
3.5.2	Test Duct Gas Pressures	10
3.5.3	Test Duct Gas Velocity and Turbulence	11
3.6	Example Facility	11
4.	TEST FLUID REQUIREMENTS	12
4.1	General	12
4.2	Fluid Identification	12
4.2.1	Viscosity	12
4.2.2	Surface Tension	12
4.2.3	Refractive Index	12
4.2.4	pH	12
5.	TEST PROCEDURE.....	13
5.1	Test Requirements	13
5.2	Test Run Sequence	13
5.2.1	Select Target Temperatures	13
5.2.2	Pre-cool Test Fluid	13
5.2.3	Pre-cool Test Facility	13
5.2.4	Measure Fluid Water Content	13
5.2.5	Apply Fluid to Test Duct Floor	13
5.2.6	Subject Fluid to Settling Conditions	14
5.2.7	Takeoff Velocity Time History	14
5.2.8	Terminate Test Run	14
5.2.9	Residual Fluid Analysis	14
5.2.10	Fluid Elimination.....	14
5.2.11	Data Processing.....	15
5.3	Test Cautions	15
5.3.1	Safety Hazards	15
5.3.2	Frost.....	15
5.3.3	Variation of Water Content	15
5.3.4	Irregular BLDT Data.....	15

SAE AS5900 Revision A

TABLE OF CONTENTS (Continued)

5.4	Data Processing.....	15
5.4.1	Test Data Description.....	15
5.4.2	Calculation Methods.....	16
5.5	Test Bias Accuracy and Precision.....	17
5.5.1	General Accuracy.....	17
5.5.2	Dry BLDT Bias.....	17
5.5.3	Fluid BLDT Bias.....	17
6.	DEICING/ANTI-ICING FLUID ACCEPTANCE CRITERIA.....	18
6.1	Fluid Acceptance Criteria.....	18
6.2	Fluid Acceptance Criteria Background.....	19
6.3	Fluid Acceptance.....	19
6.3.1	Initial Testing.....	19
6.3.2	Retesting.....	19
6.4	Continued Acceptance of Test Fluid.....	19
7.	TEST RESULTS.....	20
7.1	Test Fluid Identification Data Sheet.....	20
7.2	BLDT Measurement Summary.....	20
7.3	Test Run Data.....	20
7.4	Test Fluid Acceptance Data.....	20
7.5	Tests Fluid Acceptance Statement.....	20
7.6	Water Content Variation.....	20
8.	REPORTS.....	20
8.1	Fluid Manufacturer's Information.....	20
8.2	Aerodynamic Acceptance Test Facility Information.....	21
8.2.1	Test Facility Qualification Statement.....	21
8.2.2	Test Facility Autonomy Statement.....	21
8.2.3	Fluid Code Identification.....	21
8.2.4	Test Results.....	21
9.	KEY WORDS.....	21

SAE AS5900 Revision A

TABLE OF CONTENTS (Continued)

FIGURE 1	Test Duct Schematic	21
FIGURE 2	Takeoff Ground Acceleration Simulation for High Speed Ramp.....	22
FIGURE 3	Takeoff Ground Acceleration Simulation for Low Speed Ramp	23
FIGURE 4	Example of Facility Schematic	24
FIGURE 5	Example of Data Acquired During High Speed Ramp Test Run	25
FIGURE 6	Example of Data Acquire During Low Speed Ramp Test Run	26
FIGURE 7	Example of Test Fluid Identification Sheet	27
FIGURE 8	Example of Test Data Summary.....	28
FIGURE 9	Example of High Speed Ramp Test Result Summary.....	29
FIGURE 10	Example of Low Speed Ramp Test Result Summary	30

SAENORM.COM : Click to view the full PDF of as5900a

SAE AS5900 Revision A

1. SCOPE:

1.1 Objective:

This SAE Aerospace Standard (AS) establishes the aerodynamic flow-off requirements for SAE AMS 1424 Type I and SAE AMS 1428 Type II, III and IV. Fluids used to deice and/or anti-ice:

- a. Large transport type jet aircraft while on the ground where the takeoff rotation speeds generally exceed approximately 100 to 110 knots. (The procedure for this type of aircraft is referred to as the High Speed Ramp Tests).

and/or

- b. Commuter type aircraft while on the ground and when no compensating measures are taken in the aircraft takeoff procedure where the takeoff rotation speeds generally exceed approximately 60 knots. (The procedure for this type of aircraft is referred to as the Low Speed Ramp Tests.)

The objective of this standard is to ensure acceptable aerodynamic characteristics of the deicing/anti-icing fluids as they flow off aircraft lifting and control surfaces during the takeoff ground acceleration and climb.

1.2 Fluid Acceptance and Facility/Site Qualification:

An aircraft ground deicing/anti-icing fluid has acceptable aerodynamic flow-off characteristics if the fluid is tested in accordance with this standard and complies with the acceptance criteria described in Section 6. If result from testing in accordance with this test method are to be used to certify that an aircraft ground deicing/anti-icing fluid complies with the acceptance criteria described in Section 6, substantiation that the facility and associated staff and resources satisfy the requirements of this test method shall be documented and submitted to the Performance Review Institute, 161 Thornhill Road, Warrendale, PA 15086-7527, United States of America, or equivalent qualified third party reviewers, to qualify the technical suitability and competency of the test site/facility. Such test site/facilities shall be qualified at five-year intervals by submitting current data, which demonstrate that, the facility, procedures, supporting resources, and staff continues to produce acceptable data. To maintain compliance with this standard, the fluid shall be tested when initially certified and thereafter biannually in its undiluted and diluted forms per this standard and shall continually demonstrate acceptable aerodynamic flow characteristics.

1.3 Safety Hazards:

This standard may involve hazardous materials, operations, and equipment. This standard does not purport to address any, or all, of the safety problems associated with its use. It is the responsibility of the standard user to consult and establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

SAE AS5900 Revision A

1.4 Significance In Use:

Aerodynamic acceptance of an aircraft ground deicing/anti-icing fluid is based on the air and fluid BLDT (boundary layer displacement thickness) on a flat plate measured after experiencing the free stream velocity time history of a representative aircraft takeoff. Acceptability of the fluid is determined by comparing BLDT measurements of the candidate fluid with a datum established from the values of a reference fluid BLDT and the BLDT over the dry (clean) plate. Testing is carried out in the temperature range at which the fluid, undiluted and diluted, is to be used in airline service.

2. REFERENCES:

2.1 Applicable Documents:

The following publications form a part of this document to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. In the event of conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.1.1 SAE Publications: Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

AMS 1424 Deicing/Anti-icing Fluid, Aircraft SAE Type I
AMS 1428 Fluid, Aircraft Deicing/Anti-icing material, Non-Newtonian (Pseudoplastic), SAE Types II, III and IV

2.1.2 ASTM Publications: Available from ASTM, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM D 1193 Reagent Water
ASTM D 1331 Surface and Interfacial Tension of Solutions of Surface-Active Agents
ASTM D 1747 Refractive Index of Viscous Materials
ASTM D 2196 Viscosity Measurements and Rheological Properties of Non-Newtonian Materials by Rotational (Brookfield) Viscometer
ASTM E 70 pH of Aqueous Solutions with the Glass Electrode

2.1.3 Reference Fluid:

TABLE 1

Component	Percent by Weight
Propylene Glycol	88.0
Water	9.0-10.0
Dibasic potassium phosphate (K ₂ HPO ₄)	0.9-1.1
Sodium di-(2-ethylhexyl) sulfosuccinate (100% active)	0.45-0.55
Sodium salt of tolytriazole	0.50-0.60

The fluid shall be homogeneous and completely miscible with water.

2.1.4 Other Publications:

“Boundary Layer Evaluation of Anti-Icing Fluids for Commuter Aircraft”, Louchez, P.R., Laforte, J.L. and Bouchard, G. (UQAC), prepared for Transportation Development Center, Policy and Coordination, Transport Canada, TP11811E, August 1994

Aerodynamic Acceptance Test for Aircraft Ground Deicing/Anti-icing Fluids, Boeing Document N° D6-55573, Prepared by Renton Division Aerodynamics Engineering, August 1992

2.2 Glossary:

2.2.1 Abbreviations:

BLDT	boundary layer displacement thickness
cm	centimeter
Hz	hertz
m	meter
mm	millimeter
Pa	Pascal
pH	potential of hydrogen
RH	relative humidity
RPM	revolutions per minute
s	second

2.2.2 Parameters:

b	cross-section width at Station 3
c	cross section perimeter at Station 3
t	time
S_1	Settling chamber cross-section area (Station 1)
S_2	test duct cross-section area at Station 2
S_3	test duct cross-section area at Station 3
P_1	settling chamber static pressure (Station 1)
P_2	static pressure at Station 2
P_3	static pressure at Station 3
T_g	gas temperature (wind)
T_f	fluid temperature (deicing/anti-icing fluid)
T_t	target temperature
V	average wind velocity in flow core (at Station 2)
V_i	idle wind velocity
V_m	maximum wind velocity
V_s	start-up wind velocity
δ^*_d	BLDT over dry surface (at Station 3)
δ^*_f	BLDT over fluid-coated surface (at Station 3)
δ^*_{ave}	BLDT perimeter average between δ^*_f and δ^*_d
δ^*_r	δ^*_f value for reference fluid
δ^*_0	maximum acceptable value for δ^*_f at 0 °C
δ^*_{-20}	maximum acceptable value for δ^*_f at -20 °C
ρ	gas density mass per unit volume

3. TEST FACILITY REQUIREMENTS:

Testing shall be performed in a horizontal duct having the following geometry, flow characteristics, and instrumentation. If results produced by a test facility are to be used to certify that a deicing/anti-icing fluid has been tested in accordance with this standard and complies with Section 6 of this document, substantiation that the facility is autonomous of fluid manufacturers and complies with the following requirements shall be documented and submitted to the Performance Review Institute, 161 Thornhill Road, Warrendale, PA 15086-7527, United States of America, or equivalent qualified third party reviewers, to qualify the technical suitability and competency of the test facility. The test facility shall be qualified at five-year intervals by submitting current data, which demonstrate that the facility, instrumentation, and procedures continue to produce acceptable data. The following describes the facility used to measure the aerodynamic flow-off acceptability of deicing/anti-icing fluids. In addition, the technical capability of the site/facility also includes the ability to provide or procure the data required by 4.2, adequate transducer calibration facilities to ensure accuracy and precision requirements, and trained personnel to effect the test method.

3.1 Test Duct Description:

3.1.1 Dimensions: See Figure 1.

SAE AS5900 Revision A

3.1.2 Tolerances:

Lineal dimensions: $\leq \pm 2\%$
 S_2/S_3 : 0.927 ± 0.010

3.1.3 Design Features: The test duct floor shall be horizontal, while the ceiling shall slope upward linearly 8 mm from Station 2 to Station 3.

- a. for High Speed Ramp Tests duct surfaces shall be hydraulically smooth, resulting in a dry BLDT ≤ 3.0 mm at Station 3.
- b. or Low Speed Ramp Tests duct surfaces shall be hydraulically smooth, resulting in a dry BLDT ≤ 3.3 mm at Station 3, at 35 m/s.

Provisions shall be made to uniformly apply a 2 mm film of test fluid only on the test duct floor and to remove residual test fluid at the end of a test run.

3.2 Test Duct Gas Flow Core Characteristics:

3.2.1 Test Gas: Air, Nitrogen, or suitable gas proven to have no adverse effect on the overall testing method.

3.2.2 Temperature Range: 0°C to approximately -25°C , or the test fluid minimum usable temperature.

3.2.3 Temperature Stability: $\leq \pm 2^\circ\text{C}$ of the target temperature with a continuous flow ≥ 60 seconds, except $\leq \pm 1^\circ\text{C}$ between the 27th and 33rd seconds in for a high Speed Ramp Tests run or between the 17th and 23rd seconds for a Low Speed Ramp Tests run

3.2.4 Temperature Spatial Uniformity: $\leq \pm 1^\circ\text{C}$

3.2.5 Velocity Range:

a. For High Speed Ramp Tests:

Velocity Range: $0 = V \leq 0.5$ m/s to 65 m/s ± 5 within $t = 25$ seconds ± 2 , following a constant acceleration of 2.6 m/s² (measured at Station 2) with a minimum flow velocity of 65 m/s ± 5 , 30 seconds after start, and maintained for 30 additional seconds (see Figure 2). Prior to the flow acceleration, the duct flow shall be capable of a 5 minute settling period with a velocity ≤ 5 m/s.

b. For Low Speed Ramp Tests:

Velocity Range: $0 = V \leq 0.5$ m/s to 35 m/s ± 3 within $t = 17$ seconds ± 1 , following a constant acceleration of 2.1 m/s² (measured at Station 2) with a minimum flow velocity of 35 m/s ± 3 , 30 seconds after start, and maintained for 30 additional seconds (see Figure 3). Prior to the flow acceleration, the duct flow shall be capable of a five minute settling period with a velocity ≤ 5 m/s.

SAE AS5900 Revision A

3.2.6 Turbulence: $\leq 0.005 (\Delta U/U_\infty)$

3.2.7 Velocity Spatial Uniformity:

Vertical and lateral: $\Delta U/U_\infty \leq \pm 0.005$

Longitudinal: $\Delta U \leq 1 \text{ m/s/m} \pm 0.008 U_\infty/\text{m}$

3.2.8 Relative Humidity: $70\% \pm 30\%$

3.3 Test Facility Thermal Stability:

3.3.1 Test Duct: The test duct shall be thermally insulated or within the test facility circuit flow and capable of being precooled to ensure thermal equilibrium of the test duct during a test run.

3.3.2 Test Facility: Circuit thermal insulation shall ensure the test duct temperature characteristics of 3.2.

3.4 Test Facility Drainage:

Drainage shall be provided downstream of the test duct, in a region of low velocity, to remove test fluid and to ensure no fluid returns upstream to the test duct.

3.5 Instrumentation:

3.5.1 Temperature and Relative Humidity:

3.5.1.1 Test Duct Gas Temperature: Measured at Station 2 approximately 5 mm below the ceiling.

3.5.1.2 Test Fluid Temperature: Measured at Station 3 within the test fluid, approximately 1 mm above the floor.

3.5.1.3 Temperature Sensor: Copper-constantan thermocouples of a 0.2 mm diameter wire with a measuring junction of about 0.5 mm^3 . (Thermocouples T: range -180 to $+400$ °C, sensitivity ± 0.1 °C, accuracy ± 0.5 °C.) Thermocouple calibrations should be performed at the beginning and end of a sequence of test runs.

3.5.1.4 Relative Humidity: Wet bulb-dry bulb thermometers or equivalent, which are regularly calibrated against wet bulb-dry bulb thermometers.

3.5.2 Test Duct Gas Pressures:

3.5.2.1 Total Pressure, P_1 : May be measured as of the static pressure in the settling chamber immediately upstream of the test duct, Station 1, using a 4 mm diameter flush orifice tapped into the chamber sidewall if the velocities are low, in accordance with standard wind tunnel practice.

3.5.2.2 Inlet Static Pressure, P_2 : Measured using a 4 mm diameter flush orifice tapped into the middle of the ceiling at Station 2, free of flow disturbances from the Station 2 temperature probe.

3.5.2.3 Outlet Static Pressure, P_3 : Measured using a 4 mm diameter flush orifice tapped into the middle of the ceiling at Station 3.

3.5.2.4 Pressure Sensor: Two pressure transducers are used to measure $(P_1 - P_2)$ and $(P_2 - P_3)$ pressure differentials. The pressure transducer used for $(P_2 - P_3)$ shall have a range of at least 300 Pa with a $\pm 0.5\%$ accuracy. The pressure transducer used for $(P_1 - P_2)$ shall have a 3000 Pa range and a $\pm 1\%$ accuracy. Data stability (time variations less than 0.5 %) and time response (less than 0.1 second delay) shall be achieved by appropriate data filtering and smoothing techniques. Low pass filtering between 1 and 5 Hz and data sampling at least twice the cut-off frequency of the filter are recommended. Calibration of the measurement system shall be performed over the entire range using a reference apparatus (with accuracy of $\pm 0.25\%$ for $(P_2 - P_3)$ and $\pm 0.5\%$ for $(P_1 - P_2)$) before and after each complete test session.

3.5.3 Test Duct Gas Velocity and Turbulence:

3.5.3.1 Velocity: Test duct velocity is that at Station 2. Velocity shall be computed from the measurements of $(P_1 - P_2)$ and (S_2/S_1) using Equation 1.

$$v = \sqrt{\frac{2}{\rho}(P_1 - P_2) \left[1 - \left(\frac{S_2}{S_1}\right)^2 \right]} \quad (\text{Eq. 1})$$

Because of possible pressure leaks and losses, a calibrated pitot-static probe shall be periodically used to verify use of Equation 1.

3.5.3.2 Turbulence: Turbulence may be measured using hot wire or film sensors or other means in accordance with commonly accepted wind tunnel practices.

3.6 Example Facility:

An example facility consists of a closed circuit, refrigerated wind tunnel with a 0.5 m x 0.5 m test section. The test duct is inserted in the test section of the wind tunnel. The test duct may be fitted with a short inlet convergent to achieve required maximum speed, and a long diffuser to avoid large power losses due to wake effects. The facility has a settling chamber fitted with honeycomb and/or grids and a 9:1 contraction ratio separates this chamber and the wind tunnel test section entrance in order to provide good airflow quality. A 50 hp fan drive motor with variable RPM is controlled, by computer, via the time signal of the difference between actual wind velocity and required value. Refrigeration is obtained via a heat exchanger placed upstream of the settling chamber; a two stage Freon-glycol refrigeration circuit powered by a 75 hp compressor provides adequate temperature setting ($-30\text{ }^\circ\text{C}$). A schematic of the suggested facility is shown in Figure 4.

4. TEST FLUID REQUIREMENTS:

4.1 General:

Fluids submitted for testing shall be experimental fluids or fluids which are representative of production fluids being commercially offered as complying with this test method, shall have been manufactured during the previous three months, shall be from the same lot submitted for the water spray endurance test and the high humidity endurance test, but unshereared with respect to the requirements of the water spray and high humidity endurance tests. A volume of about 1 liter of the lot is required for one test run. Samples to be tested in diluted form shall be diluted by the testing facility, using water conforming to ASTM D 1193, Type IV. The manufacturer shall mark each fluid sample container with the company name, product name, lot number, location and date of manufacture.

4.2 Fluid Identification:

The aerodynamic acceptance testing facility shall identify the fluid by testing for the following:

- 4.2.1 Viscosity: Viscosity shall be measured by Brookfield LVT viscometer, or equivalent, at 0.3, 6 and 30 rpm with the appropriate spindle in accordance with ASTM D 2196 (except that the samples shall not be shaken), at 20 °C, 0 °C, and in 10 °C increments down to the lowest usable temperature identified by the fluid manufacturer. Viscosity measurements will be made for both the undiluted fluid and all tested dilutions.
- 4.2.2 Surface Tension: Surface tension of the undiluted fluid shall be determined at 20 °C ± 3 °C in accordance with ASTM D 1331.
- 4.2.3 Refractive Index: Refractive index of the undiluted fluid shall be determined at 20 °C ± 3 °C in accordance with ASTM D 1747.
- 4.2.4 pH: pH of the undiluted fluid shall be determined at 20 °C ± 3 °C in accordance with ASTM E 70.

5. TEST PROCEDURE:

5.1 Test Requirements:

Boundary layer displacement thickness (BLDT) measurements shall be made of the test fluid, of the dry test duct and

- a. the reference deicing fluid as described in 2.1.3 for the High Speed Ramp Tests.
- b. the reference deicing fluid as described in 2.1.3 diluted 75% fluid and 25% water for Low Speed Ramp Tests.

Each fluid shall be tested at selected fluid temperature including 0 to -20 °C, or to the coldest usable test fluid temperature identified by the fluid manufacturer (if colder than -20 °C in approximately 10 °C increments). Each fluid shall be tested at a minimum of three target temperatures (not necessarily the exact same temperatures). Three BLDT measurements shall be made within ± 3 °C at each target temperature to improve data precision and accuracy. BLDT measurements of the dry test duct shall also be made immediately prior to and after each target temperature sub-set of fluid BLDT measurements. A minimum set of nine BLDT measurements shall be performed in conjunction with the fluid measurements. Paragraph 5.2 describes the test sequence for one BLDT measurement (test run) of a fluid; for measurement of the dry test duct BLDT, ensure that the test duct is free of any fluid and follow the sequence of 5.2, deleting the steps involving the fluid.

5.2 Test Run Sequence:

5.2.1 Select Target Temperatures:

5.2.2 Pre-cool Test Fluid: Prior to testing, pre-cooling of the fluid is required to achieve target temperature during the test. However, the fluid should never experience partial freezing in order to avoid possible irreversible rheological changes. Consequently, fluid temperature shall be maintained, at all times at a minimum of 5 °C above the freezing point during the pre-cooling procedure. The pre-cooling of the fluid generally consists of two steps: first, a long storage in a cold chamber; second, once the fluid has been laid on the test duct floor, a 5-minute setting period under a wind velocity hereafter referred to as idle velocity, and denotes V_i .

5.2.3 Pre-cool Test Facility: Pre-cool the test facility to achieve test gas and structural thermal stability at the target temperature.

5.2.4 Measure Fluid Water Content: Measure the fluid's refractive index of the fluid to ensure that the fluid's water content is within $\pm 1\%$ of the fluid manufacturer's specifications.

5.2.5 Apply Fluid to Test Duct Floor: Pour approximately 1 liter of fluid onto the test duct floor and level the fluid film at 2 mm using a calibrated scraper, with the film extending from Station 1 to Station 2. Excess fluid may be scraped down stream of Station 2 toward the circuit drain, spreading the excess fluid to avoid fluid build up at the exit of the test duct.

SAE AS5900 Revision A

5.2.6 Subject Fluid to Settling Conditions: Secure the test duct and circuit and subject the fluid to a five minutes settling period with the test duct gas velocity ≤ 5 m/s to obtain gas and fluid temperatures close to the target temperature. Temperatures of the gas and fluid shall be within ± 2 °C at the end of the settling period. The duct gas flow shall not cause visually detectable motion of the test fluid.

5.2.7 Takeoff Velocity Time History: Subject fluid to a simulated aircraft takeoff velocity time history. Accelerate the test duct gas flow as shown on Figure 2 for High Speed Ramp Tests or as shown on Figure 3 for Low Speed Ramp Tests and simultaneously record t , RH, T_f , T_g , $(P_1 - P_2)$, and $(P_2 - P_3)$.

5.2.7.1 Start Up: The start up wind velocity, denoted V_s , shall range from 0 to 5 m/s.

5.2.7.2 Acceleration:

- a. For High Speed Ramp: From $t = 0$ seconds to $t = 2$ seconds ± 2 , wind velocity shall increase to V_s . From $t = 2$ seconds ± 2 to $t = 25$ seconds ± 2 , wind velocity shall increase from V_s up to V_m . From $t = 25$ seconds ± 2 up to 60 second wind velocity shall remain constant, equal to V_m .
- b. For Low Speed Ramp: From $t = 0$ seconds to $t = 2$ seconds ± 2 , wind velocity shall increase to V_s . From $t = 2$ seconds ± 2 to $t = 17$ seconds ± 1 , wind velocity shall increase from V_s up to V_m . From $t = 17$ seconds ± 1 up to 60 second wind velocity shall remain constant, equal to V_m .

5.2.7.3 Maximum Velocity:

- a. For High Speed Ramp: Maximum wind velocity, denoted V_m , shall be equal to 65 m/s \pm 5 m/s.
- b. For Low Speed Ramp: Maximum wind velocity, denoted V_m , shall be equal to 35 m/s \pm 3 m/s.

5.2.8 Terminate Test Run: At time $t = 60$ second wind velocity is brought to 0 m/s as quickly as possible.

5.2.9 Residual Fluid Analysis: Sample fluid remaining on the test duct floor for water content. Using refractive index comparison.

5.2.10 Fluid Elimination:

Type I: No requirement.

Type II,III,IV: Fluid elimination shall be calculated from determining the average thickness of fluid remaining on the lower plate of the tests section. Measurements shall be taken within 5 minutes of the end of the test at THREE locations along the flat plate as follows:

1. on centerline 1400 mm \pm 10 mm from leading edge of plate
2. on centerline 750 mm \pm 10 mm from leading edge of plate
3. at 750 mm \pm 10 mm and 2.5 mm \pm 0.5 mm from front long edge of plate

SAE AS5900 Revision A

5.2.11 Data Processing: Process measured data (see 5.4).

5.3 Test Cautions:

5.3.1 Safety Hazards: See 1.3 concerning safety hazards frost.

5.3.2 Frost: The formation of frost within the test duct will significantly affect the results obtained and, therefore, must be prevented.

5.3.3 Variation of Water Content: Dehydration of fluids prior and during testing may significantly affect the result obtained and shall therefore be prevented. Consequently, all fluids shall be kept in containers suitably capped to prevent the evaporation of water prior to being applied to the test plate. Measurement of the fluid sample refractive index immediately after the test shall be performed according to ASTM D 1797 and the variation of the water content from that measured immediately before the test (using a refractive index - dilution calibration curve) shall be derived and reported.

5.3.4 Irregular BLDT Data: The $\delta^*_d(t)$ curve for all the dry runs is carefully analyzed to detect whether or not it shows evidence of irregular behavior. Such irregular behavior results from the following:

5.3.4.1 Increasing BLDT Data: A BLDT increasing with time during the last 30 seconds of the run, when the tunnel velocity is constant, indicates a progressive roughening of the test section walls, as would result from a progressive deposit of frost on test section walls.

5.3.4.2 Constant BLDT Data: A constant value of BLDT

- a. with time during the last 30 seconds of a dry run for High Speed Ramp Tests
- b. with time during the last 40 seconds of a dry run for Low Speed Ramp Tests

but significantly larger (more than 20%) than that for all other dry runs, indicates the existence of some roughening of the test section walls by frost deposit or spurious fluid accumulation. If such irregular behavior is noticed, the results of the following tests with fluids are discarded and tests must be repeated for all the wet runs backed by two anomalous dry runs. In case a series of wet runs is bracketed by a normal (acceptable) initial dry run and an anomalous (unacceptable) final dry run, the last wet runs are questionable while the initial runs are probably acceptable.

Depending on how the results of these specific tests match the other tests of the same fluid at other temperatures, judgment is exercised to decide whether or not the result can be accepted.

5.4 Data Processing:

5.4.1 Test Data Description:

5.4.1.1 Desired Data: A time record of wind velocity (V), dry or fluid BLDT (δ^*_d or δ^*_f), fluid temperature (T_f) and relative humidity (RH) shall be provided for the 60 seconds duration of the test. An example for a High Speed Ramp Tests is given in Figure 5 and for a Low Speed Ramp Tests in Figure 6.

5.4.1.2 Desired Average Data: The specific results of a given test shall consist of values averaged over the period at the end of the acceleration, i.e., between the 27th and 33rd second of a High Speed Ramp Tests, or between the 19th and 21st second of a Low Speed Ramp Tests. These values are BLDT and fluid temperature.

5.4.2 Calculation Methods:

5.4.2.1 Velocity: See 3.5.3.1.

5.4.2.2 BLDT: The BLDT on the test duct floor, at Station 3, is evaluated from the measurement of the two pressure differences ($P_1 - P_2$) and ($P_2 - P_3$), recorded as functions of time during all the test runs. The average BLDT over the test duct perimeter δ_{ave}^* is evaluated at Station 3 using the following relation, obtained from the application of mass conservation and Bernoulli equations (See Equation 2):

$$\delta_{ave}^* = \frac{1}{c} \left[S_3 - S_2 \sqrt{\frac{(P_1 - P_2)}{(P_1 - P_2) + (P_2 - P_3)}} \right] \quad (\text{Eq. 2})$$

where:

c = Duct perimeter at Station 3
 S_2 = Area of Station 2
 S_3 = Area of Station 3

When no fluid is present on the bottom flat plate, all four tests section walls are in the same dry state and the previous expression (2) yields the value of the BLDT on a dry wall;

$$\delta_d^* = \delta_{ave}^* \quad (\text{with no fluid}) \quad (\text{Eq. 3})$$

On the other hand, when the test duct floor is covered with a layer of deicing/anti-icing fluid and the top and sides are not, the BLDT is not constant over the perimeter at Station 3. Indeed it assumes a value δ_f^* on the lower surface and another value δ_d^* on the dry sides and top walls. Expressing the previously determined δ_{ave}^* as perimeter-weighted average of δ_d^* and δ_f^* , the following relation can be obtained (See Equation 4):

$$\delta_f^* = \frac{c}{b} \left[\delta_{ave}^* - \left(\frac{c-b}{c} \right) \delta_d^* \right] \quad (\text{Eq. 4})$$

Where b is the width of the bottom flat plate. This relation is used to derive the BLDT over a wet surface, δ_f^* , from the measurement of δ_{ave}^* carried out as explained with fluid on the test duct lower surface, provided an expression for δ_d^* has been previously determined by a number or "dry" runs carried out without any fluid in the test section.

5.4.2.2 (Continued):

More precisely, these dry runs yield the value of δ_d^* and are used to determine the constant in the following empirical formula (See Equation 5):

$$\delta_d^* = \text{const} \left(\frac{V}{\nu} \right)^{-1/5} \quad (\text{Eq. 5})$$

where:

V = Tunnel air velocity at Station 2
 ν = Kinematic viscosity of the gas

For data reduction of a test with fluid in the test section, Equation 5 is used to evaluate, as function of the instantaneous velocity determined by 1, the value of δ_d^* to be used in Equation 4.

5.4.2.3 Temperature: Data produced by calibration of the thermocouples (see 3.5.1).

5.4.2.4 Relative Humidity: Data produced by calibration of the wet bulb-dry bulb thermometers (see 3.5.1.4).

5.5 Test Bias Accuracy and Precision:

5.5.1 General Accuracy: A measure of accuracy of the overall procedure is provided by test duplication. Expected accuracy on δ_f^* value (at a given precise temperature) is about ± 0.1 mm. Consequently, taking into account the temperature sensitivity of the results (about 0.2 mm/ $^{\circ}\text{C}$), the δ_f^* value from various identical tests performed at temperatures within ± 1 $^{\circ}\text{C}$ shall be within ± 0.3 mm.

5.5.2 Dry BLDT Bias: The dry BLDT value will vary with temperatures because of the variation in Reynolds Number, but shall be: 2.5 mm \pm 0.4 mm for High Speed Ramp Tests and 2.8 mm \pm 0.4 mm for Low Speed Ramp Tests. The nominal 2.5 and 2.8 mm values correspond to theoretical expected values and the variation from that value can be considered as a general bias of the facility, generally due to the initiation condition of the boundary layer.

5.5.3 Fluid BLDT Bias: Since the dry BLDT value is used in the candidate fluid BLDT value, the related bias on δ_f^* is ± 0.5 mm. This quantifies the variations, which may occur, for a given fluid, between acceptable facilities.

6. DEICING/ANTI-ICING FLUID ACCEPTANCE CRITERIA:

6.1 Fluid Acceptance Criteria:

a. For High Speed Ramp Tests:

The maximum acceptable δ_f^* value as function of temperature is established according to dry and reference results (see 5.1). Values δ_{-20}^* and δ_0^* are used as that upper limit for BLDT values. These values are:

$$\delta_0^* = \delta_r^* + 0.71(\delta_r^* - \delta_d^*)_0 \quad (\text{Eq. 6})$$

$$\delta_{-20}^* = \delta_r^* - 0.18(\delta_r^* - \delta_d^*)_{-20} \quad (\text{Eq. 7})$$

where:

δ_r^* = Reference BLDT value at 0 °C for Equation 6 and at -20 °C for Equation 7, obtained by interpolation from a straight line fitting of the reference BLDT values measured at 0, -10, -20 and -25 °C

δ_d^* = Average of all dry BLDT values measured

b. For Low Speed Ramp Tests:

The maximum acceptable δ_f^* value as function of temperature is established according to dry and reference results (see 5.1). The values δ_{-20}^* is used as that upper limit for BLDT values. This values is:

$$\delta_{-20}^* = 1.12\delta_r^* - 0.19(\delta_r^* - \delta_d^*)_{-20} \quad (\text{Eq. 8})$$

where:

δ_r^* = Reference BLDT value at -20 °C, obtained by interpolation from a straight line fitting the reference BLDT values measured at 0, -10, -20 and -25 °C

δ_d^* = Average of all dry BLDT values measured

6.2 Fluid Acceptance Criteria Background:

a. For High Speed Ramp Tests:

For more detailed information on the correlation between this standard and the work carried out on both two and three dimensional typical large jet transport models tested to determine lift loss due to the use of aircraft ground anti-icing/deicing fluids, see Boeing Document D6-55573, and its attendant bibliography.

b. For Low Speed Ramp Tests:

For more detailed information on the correlation between this standard and the work carried out on two dimensional typical small aircraft wing models tested to determine lift loss due to the use of aircraft ground anti-icing/deicing fluids, see Transport Canada Document TP11811E, and its attendant bibliography.

6.3 Fluid Acceptance:

6.3.1 Initial Testing: A deicing/anti-icing fluid is acceptable at a test temperature if none of the independent BLDT measurements is greater than the acceptance criteria as defined in 6.1 given it meets elimination requirement of AMS 1428 for Type II,III and IV. This test temperature is the average of the three lowest temperatures of the acceptable data points. The temperature ranges at which the fluid and its dilutions are found to be acceptable shall be reported in the fluid qualification statement of the report. If a fluid specimen is found unacceptable over a range of temperatures such findings shall be explicitly stated in the prescribed report (see Section 8) and the fluid manufacturer informed that the fluid not be used in that temperature range or that the airframe manufacturer be consulted prior to using the fluid within the unacceptable temperature range.

6.3.2 Retesting: if any data point fails to meet the specified acceptance criteria, disposition of the data point may be based on three additional data points for each nonconforming data point. Failure of any retest data point to meet the acceptance criteria shall be cause for failure of the fluid for that test temperature. All data points shall be reported.

6.4 Continued Acceptance of Test Fluid:

To maintain compliance with this specification, the fluid shall be tested when initially certified and thereafter biannually in its undiluted and diluted forms in accordance with this standard and shall continually demonstrate acceptable aerodynamic flow-off characteristics. With respect to this standard, a change in fluid formulation or properties constitutes a new fluid and compliance with this standard must be reconstituted. Fluids produced under license from the manufacturer of an original fluid that complies with this standard shall be required to independently show compliance herewith if the licensed fluid is tendered as meeting this standard. Compliance can be inferred for the licensed fluid if documentation is provided which validates that the original and licensed fluids are identical.

7. TEST RESULTS:

Test results shall consist of the following.

7.1 Test Fluid Identification Data Sheet:

A data sheet containing the fluid identification parameters defined in 4.2 (see Figure 7).

7.2 BLDT Measurement Summary:

Tabulation summarizing the BLDT measurements for each fluid with the corresponding dry wall BLDT measurements (see Figure 8).

7.3 Test Run Data:

Data from each test run (see Figure 5 for a High Speed Ramp Tests and Figure 6 for a Low Speed Ramp Tests).

7.4 Test Fluid Acceptance Data:

A graphic presentation of the test fluid, reference fluids, and dry test duct BLDT measurements, along with the fluid acceptance criteria described in 6.1 (see Figure 9 for a High Speed Ramp Tests and Figure 10 for a Low Speed Ramp Tests).

7.5 Test Fluid Acceptance Statement:

Statement from the aerodynamic acceptance test facility regarding acceptability of the fluid with respect to requirements of Section 6.

7.6 Water Content Variation:

Evaluation of water content variation in the test fluid during the test run shall be reported. A cautionary statement shall be issued if the water content variation is in excess of $\pm 2\%$.

8. REPORTS:

The report of the test results shall contain the following:

8.1 Fluid Manufacturer's Information:

Manufacturer's test fluid identification statement described in 4.1.

8.2 Aerodynamic Acceptance Test Facility Information:

8.2.1 Test Facility Qualification Statement: If results from testing in accordance with this standard are to be used to certify that an aircraft deicing/anti-icing fluid complies with the acceptance criteria described in Section 6, the report shall include a statement from the aerodynamic acceptance test facility that the facility meets the requirements of this standard and has been found qualified by the Performance Review Institute, 161 Thornhill Road, Warrendale, PA 15086-7527, as discussed in 1.2 and 3.4.

8.2.2 Test Facility Autonomy Statement: If results from testing in accordance with this standard are to be used to certify that an aircraft deicing/anti-icing fluid complies with the acceptance criteria described in Section 6, the report shall include a statement attesting independence of the aerodynamic acceptance test facility from fluid manufacturers, as discussed in Section 3.

8.2.3 Fluid Code Identification: Manufacturer's product name cross-referenced with the aerodynamic acceptance facility reference.

8.2.4 Test Results: As discussed in Section 7.

9. KEY WORDS:

Aerodynamic acceptance, aircraft ground deicing/anti-icing, deicing/anti-icing fluids, fluid flow-off

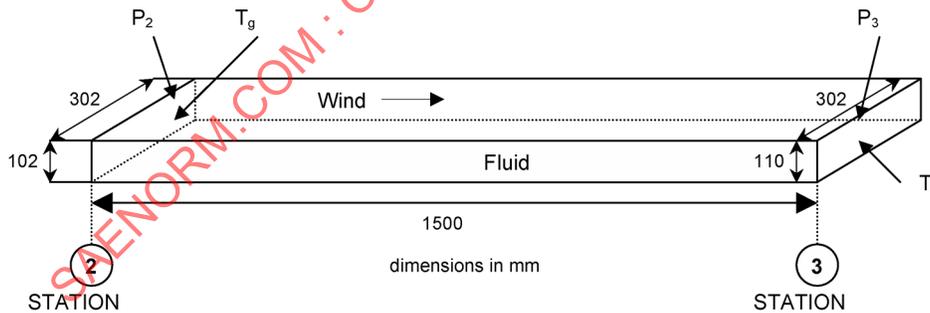


FIGURE 1 - Test Duct Schematic

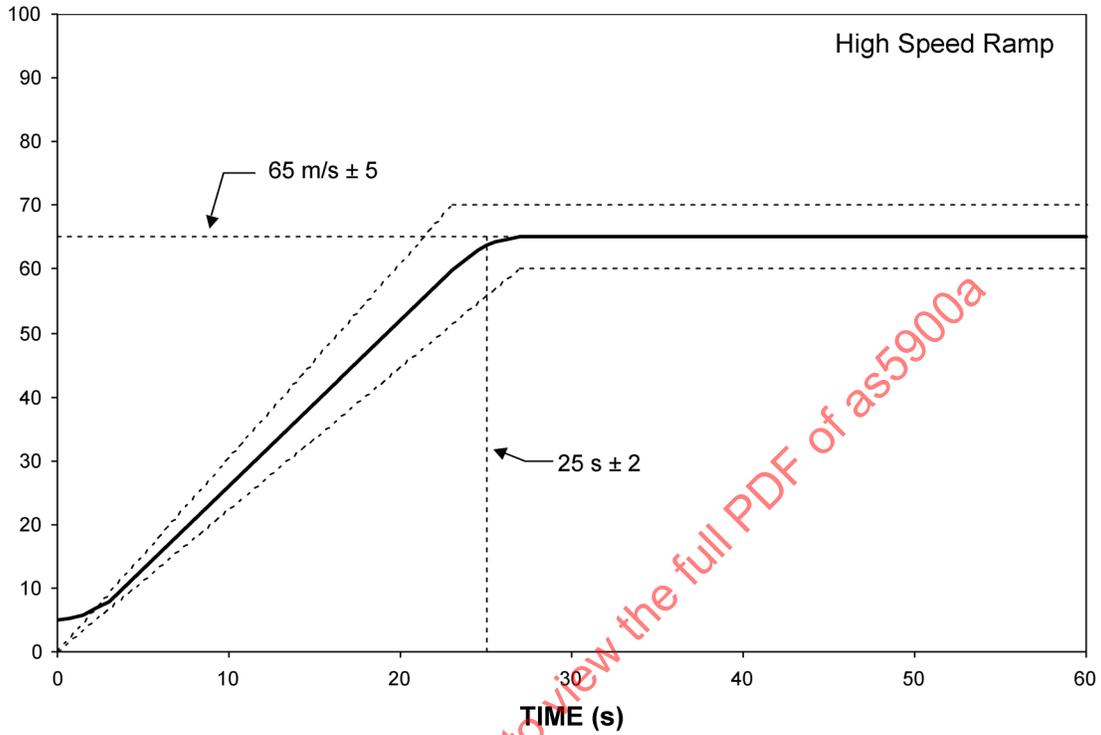


FIGURE 2 - Takeoff Ground Acceleration Simulation for High Speed Ramp

SAENORM.COM : Click to view the full PDF of as5900a

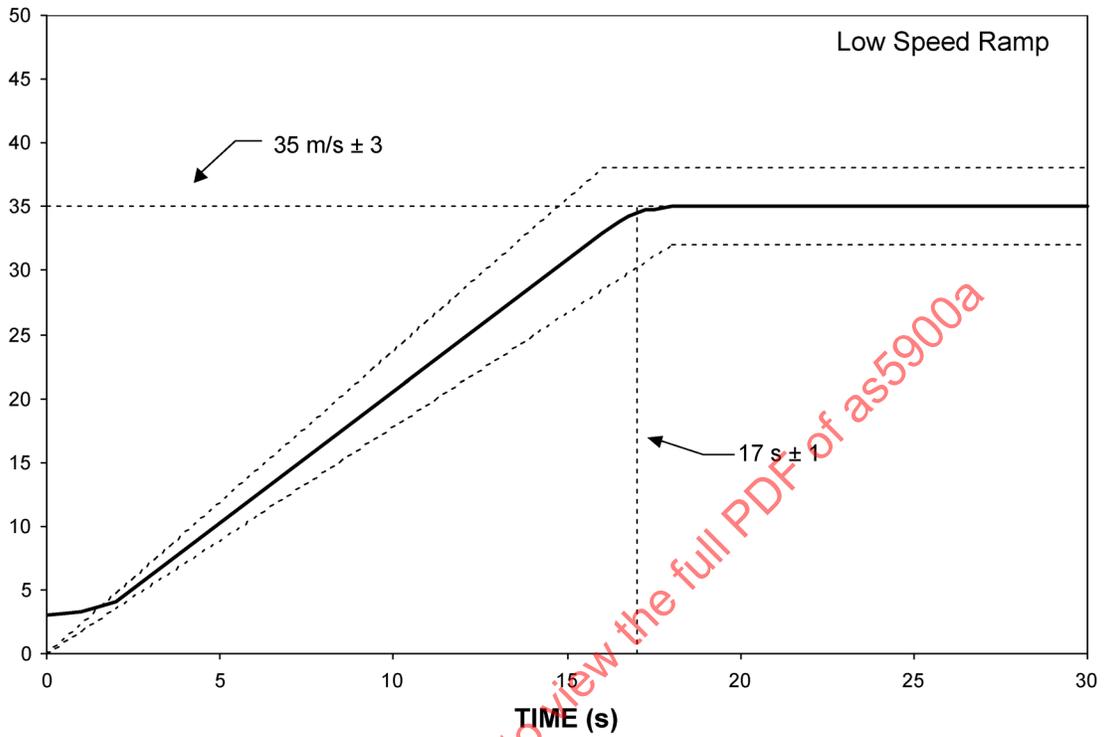


FIGURE 3 - Takeoff Ground Acceleration Simulation for Low Speed Ramp

SAENORM.COM : Click to view the full PDF of as5900a

SAE AS5900 Revision A

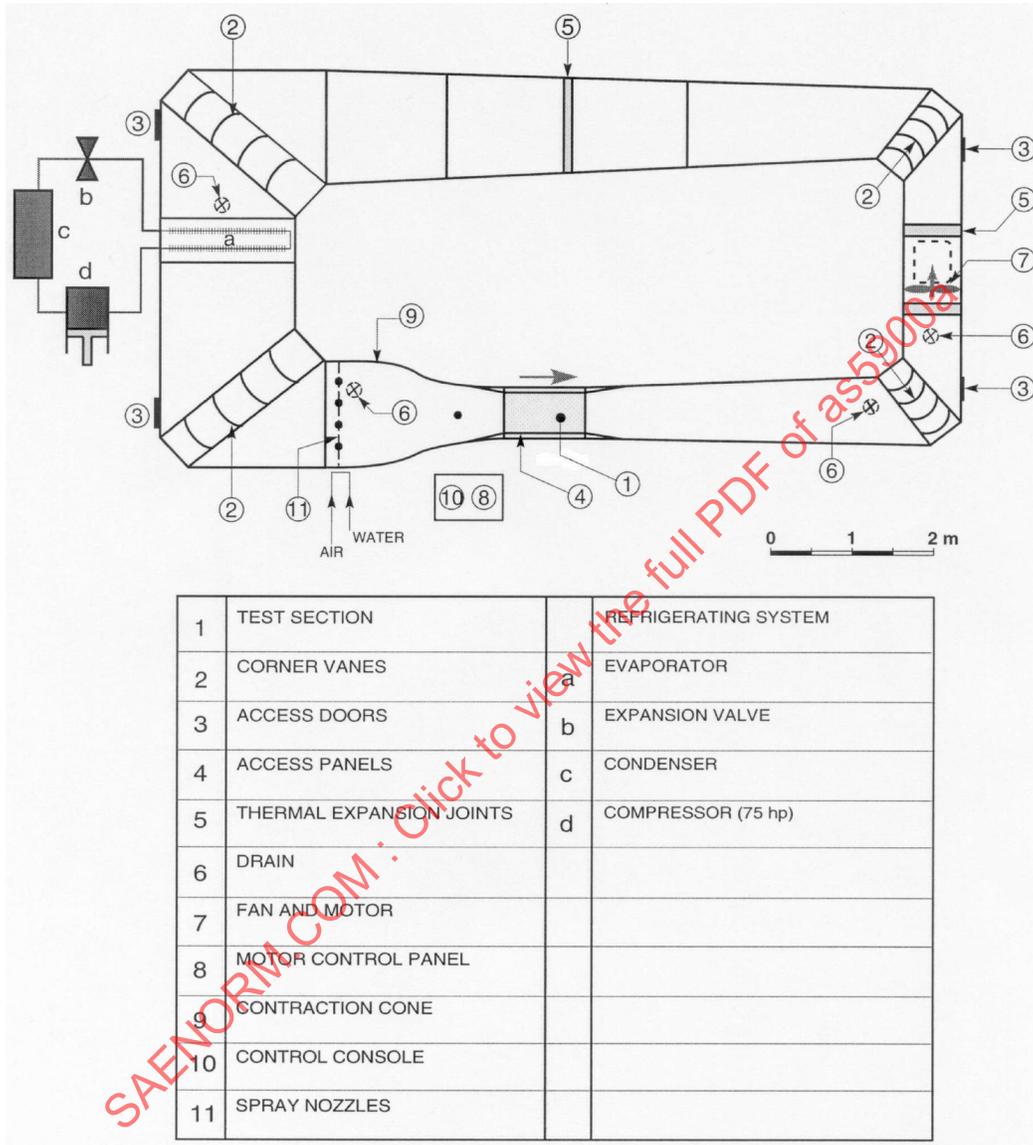


FIGURE 4 - Example of Facility Schematic