



AEROSPACE STANDARD	AS5901	REV. C
	Issued	2003-02
	Revised	2014-06
Superseding AS5901B		
(R) Water Spray and High Humidity Endurance Test Methods for SAE AMS1424 and SAE AMS1428 Aircraft Deicing/Anti-icing Fluids		

RATIONALE

This document brings clarifications to test methods and proposes some editorial changes. The main change is in 5.4 where the icing intensity measurement procedure has been reviewed and updated; the indirect method has been removed as an approved method. In 4.2.2 and 4.2.2.1, the relative humidity percentage (% RH) requirement has been changed to reflect the minimum %RH requirement of the HHET in 3.3. Section 4.2.2.1 has also been modified to reflect the actual test conditions.

TABLE OF CONTENTS

1.	SCOPE.....	3
1.1	Minimum Requirements.....	3
1.2	Hazardous Materials.....	3
1.3	Standard Units.....	3
2.	APPLICABLE DOCUMENTS.....	3
2.1	SAE Publications.....	3
2.2	ASTM Publications.....	3
2.3	ISO Publications.....	3
3.	SUMMARY OF TEST.....	4
3.1	Introduction.....	4
3.2	Water Spray Endurance Test (WSET).....	4
3.3	High Humidity Endurance Test (HHET).....	4
4.	EQUIPMENT AND TEST PARAMETERS.....	4
4.1	General.....	4
4.2	Test Chamber.....	4
4.2.1	Water Spray Endurance Test (WSET) Chamber.....	5
4.2.2	High Humidity Endurance Test (HHET) Chamber.....	5
4.3	Test Plate Requirement.....	5
4.4	Temperature Control Equipment.....	6
4.5	Air Distribution System.....	6
5.	CALIBRATION OF TEST EQUIPMENT.....	6
5.1	Standard Measuring Devices.....	6
5.2	Water Droplet Size and Distribution Range.....	6
5.2.1	Average Droplet Diameter Requirement for WSET.....	6
5.2.2	Droplet Limit Size for HHET.....	6

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2014 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: +1 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
 http://www.sae.org

SAE WEB ADDRESS:

SAE values your input. To provide feedback on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS5901C>

5.3	Methods to Measure the Droplet Size.....	6
5.3.1	Slide Impact Method	7
5.3.2	Laser Diffraction Method	7
5.4	Icing Intensity Calibration and Measurement.....	7
5.4.1	Test Conditions	7
5.4.2	Icing Intensity Measurement	7
6.	TEST PROCEDURE	8
6.1	Test Plate Cleanliness	8
6.2	Required Temperature	8
6.3	Fluid Preparation.....	8
6.4	Test Description	8
6.5	Reproducibility/Precision.....	8
6.6	Report.....	9
7.	NOTES.....	9
FIGURE 1	LINE MARKINGS ON THE TEST PLATE TO DELINEATE THE FAILURE ZONE.....	10
FIGURE 2	EXAMPLE OF SPRAY NOZZLE (ALL DIMENSIONS MM).....	11
FIGURE 3	EXAMPLE OF WATER SPRAY EXPERIMENTAL SET-UP.....	12
FIGURE 4	ANTI-ICING ENDURANCE TESTS PROPOSED ORDER OF FLUID APPLICATION TO A FROSTICATOR HAVING 3 TEST PANELS AND 9 ICE CATCH PANELS	13
TABLE 1	WATER SPRAY AND HIGH HUMIDITY ENDURANCE TESTS CONDITIONS	7

SAENORM.COM : Click to view the full PDF of AS5901C

1. SCOPE

1.1 Minimum Requirements

This document establishes the minimum requirements for an environmental test chamber, and test procedures to carry out anti-icing performance tests according to the current materials specification for aircraft deicing/anti-icing fluids. The primary purpose for such a test method is to determine the anti-icing endurance under controlled laboratory conditions of AMS1424 Type I and AMS1428 Type II, III, and IV fluids.

1.2 Hazardous Materials

This test may involve the use of hazardous materials, operations, and equipment. This Standard does not purport to address all of the safety problems associated with its use. It is the responsibility of the user to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

1.3 Standard Units

The values stated in SI units are to be regarded as the standard.

2. APPLICABLE DOCUMENTS

The following publications form a part of this document to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. In the event of conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

AMS1424 Deicing/Anti-Icing Fluid, Aircraft SAE Type I

AMS1428 Fluid, Aircraft Deicing/Anti-Icing, Non-Newtonian (Pseudoplastic), SAE Types II, III, and IV

AMS4037 Aluminum Alloy, Sheet and Plate, 4.4Cu - 1.5Mg - 0.6Mn (2024; -T3 Flat Sheet, -T351 Plate) Solution Heat Treated

2.2 ASTM Publications

Available from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, Tel: 610-832-9585, www.astm.org.

ASTM D1193 Reagent Water

2.3 ISO Publications

Available from International Organization for Standardization, ISO Central Secretariat, 1, ch. de la Voie-Creuse, CP 56, CH-1211 Geneva 20, Switzerland, Tel: +41 22 749 01 11, www.iso.org.

ISO 9001-2008 Quality Management Systems - Requirements

3. SUMMARY OF TEST

3.1 Introduction

This test describes how to determine the laboratory anti-icing performance of AMS1424 Type I and AMS1428 Type II, III, and IV fluids. The test fluids to be evaluated are applied to a test plate exposed to two types of freezing conditions, and their anti-icing performance is evaluated by measuring the minimum exposure time before a specified degree of freezing occurs. A general description of the two types of anti-icing tests referred to in this standard is as follow.

3.2 Water Spray Endurance Test (WSET)

This test involves pouring the unchilled fluid onto an inclined test plate (10 degrees from horizontal) at $-5.0\text{ }^{\circ}\text{C} \pm 0.5\text{ }^{\circ}\text{C}$ ($23\text{ }^{\circ}\text{F} \pm 1\text{ }^{\circ}\text{F}$) and applying a cooled water spray in air at $-5.0\text{ }^{\circ}\text{C} \pm 0.5\text{ }^{\circ}\text{C}$ ($23\text{ }^{\circ}\text{F} \pm 1\text{ }^{\circ}\text{F}$). The water spray endurance is recorded as the time for ice formation to reach the failure zone defined as the area 25 mm below the upper edge of the test plate and 5 mm in from either side of the test plate or the formation of slush on 10% of the plate surface (see Figure 1), when water spray intensity corresponds to $5.0\text{ g/dm}^2/\text{h} \pm 0.2\text{ g/dm}^2/\text{h}$. It is a fundamental requirement of this test that the spray impinges onto the surface of the test plate as water droplets, which freeze, on impact. This is verified by observation of the untreated or ice catch panels. Whatever the WSET endurance time of the fluid tested, the minimum duration of the test shall be at least 30 minutes, in order to validate the average icing intensity measurement.

3.3 High Humidity Endurance Test (HHET)

This test involves pouring the unchilled fluid onto an inclined test plate (10 degrees from horizontal) at $-5.0\text{ }^{\circ}\text{C} \pm 0.5\text{ }^{\circ}\text{C}$ ($23\text{ }^{\circ}\text{F} \pm 1\text{ }^{\circ}\text{F}$), when the air temperature is $0.0\text{ }^{\circ}\text{C} \pm 0.5\text{ }^{\circ}\text{C}$ ($32\text{ }^{\circ}\text{F} \pm 1\text{ }^{\circ}\text{F}$) and the relative humidity (RH) is more than 80%. The high humidity endurance is recorded as the time for ice formation to reach the failure zone defined as the area 25 mm below the upper edge of the test plate and 5 mm in from either side of the test plate (see Figure 1). Under these conditions, when the ice formation corresponds to $0.30\text{ g/dm}^2/\text{h} \pm 0.05\text{ g/dm}^2/\text{h}$, it is a fundamental requirement of this test that it be performed in the absence of any visible precipitation (such as mist, fog, or drizzle). Whatever the HHET endurance time of the fluid tested, the minimum duration of the test shall be at least 2 hours, in order to validate the average icing intensity measurement.

4. EQUIPMENT AND TEST PARAMETERS

4.1 General

A description of the minimum requirements for the environmental test chamber and associated test equipment, including chilling unit, test plate, ice catch panels, spray equipment, humidity generator and data acquisition is given below. Other spray and humidity control equipment, which meet the requirements of this Standard, are acceptable.

4.2 Test Chamber

The test chamber used to perform both WSET and HHET shall have a minimum volume of 1 m^3 for each 2.25 dm^2 of test panel area or 8 m^3 for the minimum test plate dimensions (see 4.3). A window shall be installed and shall be double glazed or heated to prevent condensation to provide a clear view of the test plate. The tests can be videotaped using superimposed real time to gain additional information and as a record of the test procedure and the duration of the tests. The chamber shall be fitted with a door or equivalent entry port to allow for fluid application, ice catch measurement, and inspection of the test chamber equipment.

The test chamber shall be capable of air temperature control in the range 0 to $-5\text{ }^{\circ}\text{C}$ (32 to $23\text{ }^{\circ}\text{F}$) with an accuracy of $\pm 0.5\text{ }^{\circ}\text{C}$ ($\pm 1\text{ }^{\circ}\text{F}$). The temperature sensing device shall be mounted at the exit side of the air recirculation system and shall be within 0.5 m of the side of the test plate, but outside the direct line of the spray nozzle when in use. When a high humidity condition is required, the humidity sensor shall be placed 5 cm above the surface of the test plate at the center line of the upper edge of the test plate. Both the air temperature and humidity sensing devices shall be linked to a continuous electronic data acquisition system as a means of checking the environmental control characteristics of the test chamber throughout the course of a test run. The air exchange rate in the chamber shall correspond to an average air velocity of $0.20\text{ m/s} \pm 0.05\text{ m/s}$ when measured 5 cm above the surface of the test plate.

One test chamber can be used to perform both the WSET and HHET provided that it meets the required specific environmental test parameters as described in 4.2.1 and 4.2.2.

4.2.1 Water Spray Endurance Test (WSET) Chamber

The spray equipment is used in the water spray endurance test to provide the water spray from a nozzle supplied with low flow water and atomized by compressed air or by spinning disc. This equipment is housed in the upper region (ceiling) of the test chamber above the test plate. The water shall conform to ASTM D1193, Type IV, and when used, the compressed air shall be clean and oil free. The spray equipment shall be adjusted in order to meet the following criteria:

- a. Average droplet diameter of the water spray shall be 20 μm , with 50% of the droplets in the range 15 to 35 μm , determined in accordance with one of the test methods described in 5.2.
- b. The average intensity of the water spray produced during a test shall correspond to 5.0 $\text{g}/\text{dm}^2/\text{h} \pm 0.2 \text{ g}/\text{dm}^2/\text{h}$.
- c. The water spray shall be evenly distributed over the entire area of the test plate.
- d. The water spray shall impinge on the surface of the test plate in the form of water droplets, which freeze on impact when both air and test plate temperatures are at $-5.0 \text{ }^\circ\text{C} \pm 0.5 \text{ }^\circ\text{C}$ ($23 \text{ }^\circ\text{F} \pm 1 \text{ }^\circ\text{F}$). The exact type and geometry of the spray system used to generate the water spray for the test is left to the discretion of the user, provided the foregoing parameters are met.

As a means of providing some background information, an example of a suitable spray system is described in 4.2.1.1.

4.2.1.1 Example of Spray Equipment

The nozzle comprises two sections, outer and inner units for the respective passage of water and compressed air. The critical dimensions are given in Figure 2. Typical input water and air pressure to achieve the required intensity are: water flow rate of 24 cm^3 per minute, air pressure 1.7 bar (25 psi). In this example the nozzle is mounted 65 cm above the test plate and is capable of traversing a 1 m path parallel to the test plate face and some 60 cm behind the upper edge of the plate. The nozzle reciprocates at 18 passes per minute, and in this configuration provides even and reproducible coverage of the test plate at the specified rate. See Figure 3 for a schematic layout of this system.

4.2.2 High Humidity Endurance Test (HHET) Chamber

The humidity can be produced using a saturated water vapor generator housed in the exit side of the air recirculation system and recorded using a calibrated humidity sensor. The humidity generator shall be capable of a minimum of 80% RH when the air temperature is at $0 \text{ }^\circ\text{C}$ ($32 \text{ }^\circ\text{F}$) in the absence of any visible precipitation such as mist, fog, or drizzle. There shall be no water droplets having a diameter greater than 4 μm , determined in accordance with one of the test methods described in 5.2. Under these conditions of RH and air temperature, and in the presence of horizontal air velocity of $0.20 \text{ m/s} \pm 0.05 \text{ m/s}$, the frost accumulation rate on the test plate, cooled to $-5.0 \text{ }^\circ\text{C} \pm 0.5 \text{ }^\circ\text{C}$ ($23 \text{ }^\circ\text{F} \pm 1 \text{ }^\circ\text{F}$) shall be $0.30 \text{ g}/\text{dm}^2/\text{h} \pm 0.05 \text{ g}/\text{dm}^2/\text{h}$ at the end of the test, if the test lasts less than 10 hours, and $0.3 \text{ g}/\text{dm}^2/\text{h} \pm 0.1 \text{ g}/\text{dm}^2/\text{h}$ if the test lasts 10 hours or more.

4.2.2.1 Humidity Generator Equipment

Relative humidity shall be maintained at the minimum specified level using a saturated water vapor generator, or equivalent, connected to a humidity sensor of the capacitance, resistance or conductivity type capable of covering the range 80 to 100% RH at $0 \text{ }^\circ\text{C}$ ($32 \text{ }^\circ\text{F}$).

4.3 Test Plate Requirement

The test plate is either the upper surface of the test plate chiller unit or removable panels sited on the face of the chiller unit. Both the test plate and chiller unit are housed within the test chamber.

The test plate shall be AMS4037 aluminum alloy with the test face polished to an average surface roughness of $\leq 0.5 \mu\text{m Ra}$. This measurement shall be made width-wise across the upper section of each test plate using a surface roughness tester. The chiller unit face shall be inclined at $10.0 \text{ degrees} \pm 0.2 \text{ degree}$ from the horizontal. The upper surface of chiller unit shall be comprised of at least six panels (six test plates), each separated by a divider which will protrude 5 mm above the surface of the test plates to obviate the possibility of cross contamination between fluids applied to adjacent panels. Each test plate shall measure $300.0 \text{ mm} \pm 0.5 \text{ mm}$ long by $100.0 \text{ mm} \pm 0.5 \text{ mm}$ wide (area = 3 dm^2) and may be clearly marked with the failure zone using a permanent pen as follows:

The area 25 mm below the upper edge of the test plate and 5 mm in from either side of the test plate (see Figure 1). Clear marks on the dividers and the chiller unit can also be used to determine the failure zone.

The chiller unit shall be coupled to a fluid cell capable of accepting a recirculation supply of heat transfer fluid such that the upper surface of the test plate can be exposed to a temperature of $-5.0 \text{ }^\circ\text{C} \pm 0.5 \text{ }^\circ\text{C}$ ($23 \text{ }^\circ\text{F} \pm 1 \text{ }^\circ\text{F}$). The temperature sensing device shall be mounted in the recirculation fluid cell or in the return pipe taking the heat transfer fluid from the fluid cell to the heat exchanger. This temperature sensor shall be linked to a continuous electronic data acquisition system to check and record the test plate temperature throughout the course of a test run.

4.4 Temperature Control Equipment

Both the air and test plate temperatures shall be maintained at the required level using heat exchangers connected to on/off temperature control equipment comprising solid state temperature sensor such as a platinum resistance probe [100Ω at $0 \text{ }^\circ\text{C}$ ($32 \text{ }^\circ\text{F}$)], coupled to a proportional temperature controller having a minimum resolution of $0.5 \text{ }^\circ\text{C}$ ($1 \text{ }^\circ\text{F}$).

4.5 Air Distribution System

The air distribution system shall comprise of a fan to provide air recirculation through the main body of the test chamber and to the heat exchanger. Ducting for the passage of air to and from the heat exchanger shall have entry and exit ports positioned to provide good air recirculation throughout the test chamber. The heat exchanger shall be capable of cooling the air and maintaining it at the specified level. The air movement within the test chamber, measured during high humidity endurance testing, shall be as specified. Air flow shall be measured using a suitable anemometer or velometer.

5. CALIBRATION OF TEST EQUIPMENT

5.1 Standard Measuring Devices

All temperature sensors, humidity sensors, electronic balances, anemometers, and timing devices shall be maintained in a known state of calibration by means of a Quality Management System recognized by an international standards organization such as ISO 9001:2008 (or equivalent). Each instrument used as a reference, shall be calibrated by a certified laboratory, which uses primary standards that are directly traceable to the U.S. National Institute of Standards and Technology and/or the National Research Council of Canada, or any other recognized national standards organization.

5.2 Water Droplet Size and Distribution Range

5.2.1 Average Droplet Diameter Requirement for WSET

Water spray droplet size shall have an average diameter of $20 \mu\text{m} \pm 2 \mu\text{m}$, with 50% of the droplets in the range 15 to $35 \mu\text{m}$.

5.2.2 Droplet Limit Size for HHET

During the HHET the water vapor must not contain any droplet greater in diameter than $4 \mu\text{m}$.

5.3 Methods to Measure the Droplet Size

The following methods can be used to determine the droplet sizes referred to in 5.2.1 and 5.2.2.

5.3.1 Slide Impact Method

A sample of the water droplets from the precipitation is collected on an oil coated microscope slide. Oil having a viscosity of 5000 mPa.s at 20 °C (68 °F), spread to a thickness of about 500 µm will be suitable. The oil can be either a mineral oil or silicone oil. The droplet size is determined by direct observation under a microscope using an eyepiece with the appropriate graticule, or from enlarged photographs of the slide.

5.3.2 Laser Diffraction Method

Using a laser diffraction particle analyzer, incorporating a low power laser transmitter and photo detector, the size of the droplets can be measured as they fall towards the surface of the test plate. Analysis of the diffraction patterns gives the size and distribution of the droplets. Some equipment is capable of achieving this in real time.

5.4 Icing Intensity Calibration and Measurement

5.4.1 Test Conditions

For both types of anti-icing endurance tests, it is important to establish that even and reproducible ice formation occurs over the surface of the test plates. To carry out this evaluation, ice catch measurements must be performed under the appropriate test conditions for water spray and high humidity endurance tests. A summary of the test conditions follows in Table 1:

TABLE 1 - WATER SPRAY AND HIGH HUMIDITY ENDURANCE TESTS CONDITIONS

PARAMETER	TEST REQUIREMENT	
	WSET	HHET
Air Temperature	-5.0 °C ± 0.5 °C (23 °F ± 1 °F)	0.0 °C ± 0.5 °C (32 °F ± 1 °F)
Test Plate Temperature	-5.0 °C ± 0.5 °C (23 °F ± 1 °F)	
Relative Humidity	-	More than 80 (%RH)
Horizontal Air Velocity	-	0.20 m/s ± 0.05 m/s
Test Plate Slope	10.0 degrees ± 0.2 degree from horizontal	
Test Plate Surface Roughness	≤ 0.5 µm	
Average Droplet Diameter	20 µm ± 2 µm	Not greater than 4 µm
Average Icing Intensity	5.0 g/dm ² /h ± 0.2 g/dm ² /h	0.30 g/dm ² /h ± 0.05 g/dm ² /h (test duration less than 10 hours) 0.3 g/dm ² /h ± 0.1 g/dm ² /h (test duration 10 hours or more)
Minimum Test Duration	30 minutes	2 hours

5.4.2 Icing Intensity Measurement

The ice catch for WSET and HHET shall be assessed using three 10 cm x 10 cm small ice catch panels (instead of one 10 cm x 30 cm test plate).. This method is reliable, since the pre-weighed panels can be weighed upon completion of the test, and the difference between the recorded weights corresponds to the ice catch. The ice catch panels shall be AMS4037 aluminum alloy mill finish, of 1.6 mm (0.0625 in) thickness. Ice catch on each 10 cm x 10 cm section shall correspond to 5.0 g ± 0.2 g for each hour of the WSET and 0.30 g/h ± 0.05 g/h for each hour of the HHET for a duration less than 10 hours. When the HHET exceeds a 10 hour duration, the ice catch shall be 0.3 g/h ± 0.1 g/h. The icing intensity, expressed in terms of g/dm²/h, corresponds to the average of the results obtained with all ice catch panels used during the test. Performing not less than two successive test runs shall check the degree of repeatability. The same performance limits must be achieved in each run. This calibration shall be run at least once every six months or whenever a piece of equipment is repaired or replaced.

NOTE: Other methods can be used to measure the icing intensity. However; the method described above is the only approved method as per AS5901 standard. Therefore, other methods shall be used for screening tests only.

An alternate method consists of marking the 10 cm x 30 cm test panels with lines at the 10 and 20 cm points. On completion of the test, the ice is scraped from each third of the plate and weighed. The disadvantage with this method is the possibility of damaging the polished surface of the test panel. Comparative tests have demonstrated that this method is clearly less accurate, but can be used as an estimation of the icing intensity for fluids development purposes.

6. TEST PROCEDURE

6.1 Test Plate Cleanliness

The test plates shall be free of all visible contamination, smears, or stains, including the area 25 mm below the upper edge of the test plate and 5 mm in from either side of the test plate (see Figure 1).

Washing and thoroughly drying shall remove any contamination. Between test runs using the same candidate fluid, water wash and drying will suffice. Particular care should be taken to ensure the test plate to divider interface is clean and dry in order to prevent the formation of ice seed crystals, which lead to premature failure indications.

6.2 Required Temperature

Ensure the test chamber and test plate support are at the required temperature (see Table 1).

6.3 Fluid Preparation

The candidate test fluid shall have been sheared, within the time limit, in accordance with the specification for the respective SAE Type fluid before the test is to commence (refer to AMS1424 3.3.4 for Type I fluid and to AMS1428 3.2.2.7 for Type II, III, and IV fluid). The candidate test fluid shall be at ambient temperature, in the range of 15 to 25 °C (59 to 77 °F). For each test panel to be coated with the fluid prepare 115 mL or 120 g for each test run. If more fluid is required, the quantity of fluid actually used will be mentioned in the report qualification statement.

6.4 Test Description

Each test involves the use of three test plates (see 4.3) and nine ice catch panels (see 5.4.2). Pour the fluid onto each test plate in turn in the order shown in Figure 4. Start the timing device and after 5 minutes, turn on the water spray or humidity generator (an alternative option consists of covering the test plates with a protection shield, turning on the water spray or humidity generator and after 5 minutes, removing the protection shield). Observe the test panels and, when the ice front touches the failure zone (or the formation of 10% slush of the plate's surface), record the time of this event. When the water spray or humidity generator is turned off, weigh the nine 10 cm x 10 cm ice catch panels and determine the average icing intensity as described in 5.4.2. If the ice catch is within the specified limits for the test being conducted, the time for the ice front to reach the failure zone is valid for that test. Repeat the test using the alternate layout for the test panels to be coated with the candidate test fluid. If the two successive runs indicate conformance to the ice catch criteria, the times for the ice fronts to reach the failure zone shall be recorded on the report. The formal anti-icing endurance time (WSET or HHET) corresponds to the average time of the two test results, obtained with the tests performed, using the two different layouts of the test panels.

6.5 Reproducibility/Precision

The WSET and HHET are dynamic by nature, and small variations can be expected. The acceptable variation between the anti-icing endurance time averages of two WSET or HHET performed with the same candidate fluid is 20% of the average time for a Type I fluid and 10% for a Type II, III, and IV fluid.

6.6 Report

The report shall state the name and address of the facility conducting the tests, together with a statement confirming the test facility is autonomous of the manufacturer or vendor of the fluid. The following information will also appear on the test document:

- a. Date tests conducted
- b. Manufacturer or vendor's name and address
- c. Name or reference number of the fluid tested
- d. Lot number of the fluid tested
- e. Type of fluid (SAE Type I, SAE Type II, SAE Type III, or SAE Type IV)
- f. Condition of fluid - Concentrate as supplied to test facility, or diluted with hard water as defined in the specification and subsequently sheared in accordance with specification giving the dilution as a ratio - example: SAE Type II diluted 75:25 with water
- g. Printout showing the temperature of the test chamber, and test plate; and for the high humidity test a printout showing the relative humidity percentage (%RH) for the duration of the tests
- h. Summary of test results, ice catch results for each test performed and anti-icing endurance time for WSET and HHET with standard deviations
- i. Statement that the fluid tested either conforms to, or does not conform to the requirements of the specification against which the candidate fluid was tested
- j. The qualification date
- k. The qualification period time duration

7. NOTES

- 7.1 A change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions, not editorial changes, have been made to the previous issue of this document. An (R) symbol to the left of the document title indicates a complete revision of the document, including technical revisions. Change bars and (R) are not used in original publications, nor in documents that contain editorial changes only.

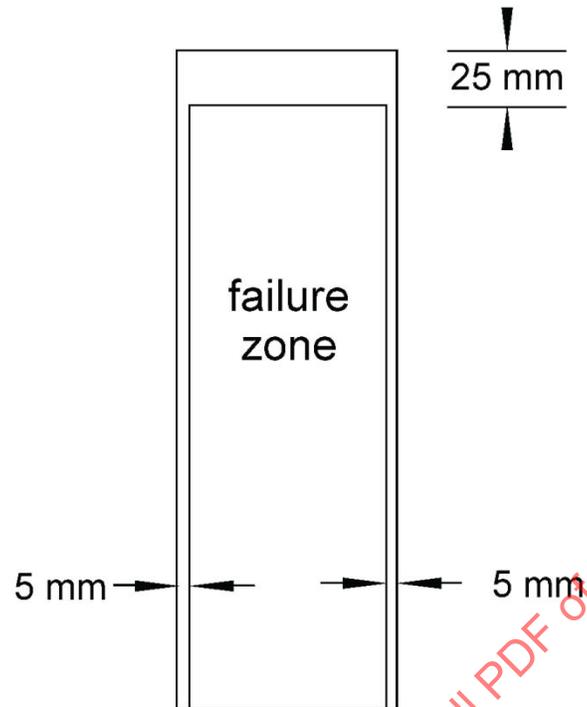


FIGURE 1 - LINE MARKINGS ON THE TEST PLATE TO DELINEATE THE FAILURE ZONE

SAENORM.COM : Click to view the full PDF of as5901c