

AS5963

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

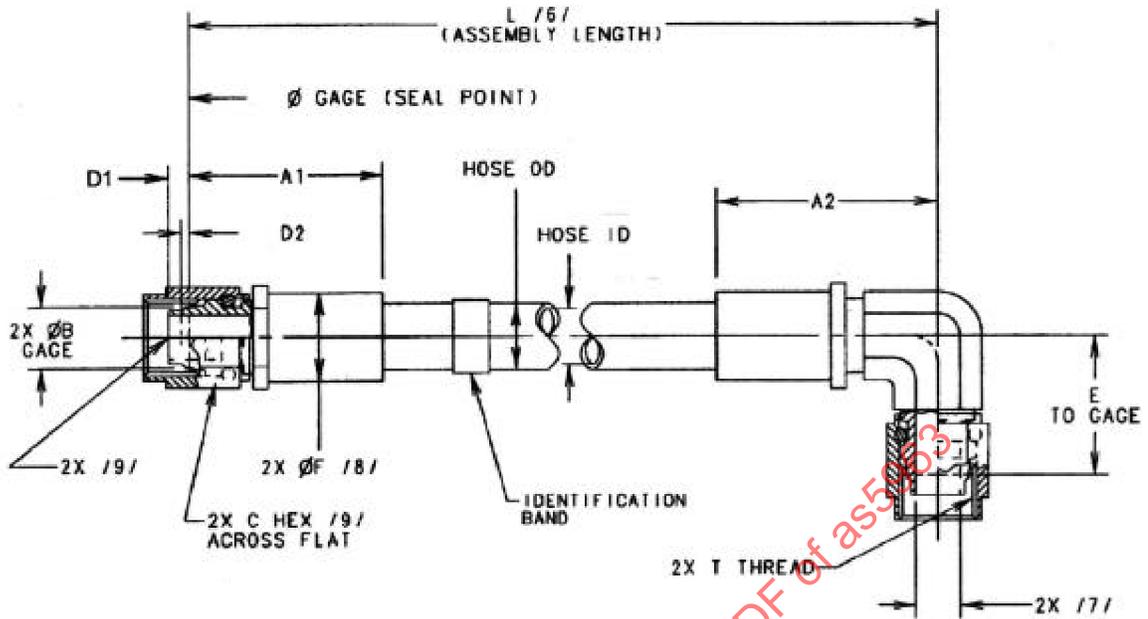


FIGURE 1 - HOSE ASSEMBLY DIMENSIONS

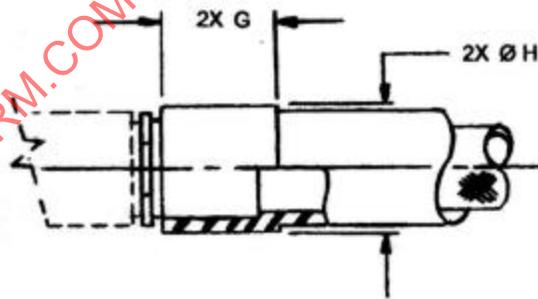


FIGURE 2 - INTEGRAL FIRESLEEVECUFF / 13/

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS5960 /2/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE
CRES BRAID REINFORCED, 400 °F, 5080 PSI
FLARELESS, STRAIGHT TO 90° ELBOW

AS5963
SHEET 1 OF 5

TABLE 1 - HOSE ASSEMBLY DIMENSIONS

HOSE ASSEMBLY AS5963 SIZE CODE	SIZE	FITTING TYPE /17/	THREAD T PER AS8879	A1 MAX	A2 MAX	Ø B GAGE BASIC	C HEX	(D1) /9/	(D2) /9/
E	.250	--	--	--	--	---	--	--	--
E	.250	S	.4375-28UNJEF-3B	2.64	2.78	.2930	.56	.16	.055
E	.250	E	.5625-24UNJEF-3B	2.74	2.84	.4120	.69	.16	.055
G	.375	R	.4375-28UNJEF-3B	2.90	2.99	.2930	.56	.16	.055
G	.375	S	.5625-24UNJEF-3B	2.94	3.05	.4120	.69	.16	.055
G	.375	E	.7500-20UNJEF-3B	3.07	3.14	.5600	.88	.19	.066
H	.500	R	.5625-24UNJEF-3B	3.19	3.30	.4120	.69	.16	.055
H	.500	S	.7500-20UNJEF-3B	3.32	3.39	.5600	.88	.19	.066
H	.500	E	.8750-20UNJEF-3B	3.39	3.46	.6730	1.00	.20	.066
J	.625	R	.7500-20UNJEF-3B	3.55	3.62	.5600	.88	.19	.066
J	.625	S	.8750-20UNJEF-3B	3.62	3.69	.6730	1.00	.20	.066
J	.625	E	1.0625-18UNJEF-3B	3.87	3.81	.8100	1.25	.23	.066
K	.750	R	.8750-20UNJEF-3B	3.89	3.94	.6730	1.00	.20	.066
K	.750	S	1.0625-18UNJEF-3B	3.95	4.05	.8100	1.25	.23	.066
K	.750	E	1.3125-16UNJ-3B	4.06	4.46	1.0620	1.50	.30	.066
M	1.000	R	1.0625-18UNJEF-3B	4.42	4.53	.8100	1.25	.23	.066
M	1.000	S	1.3125-16UNJ-3B	4.54	4.92	1.0620	1.50	.30	.066
M	1.000	E	1.6250-16UNJ-3B	4.64	5.12	1.3160	1.81	.30	.066
N	1.250	--	--	--	--	--	--	--	--
N	1.250	S	1.6250-16UNJ-3B	4.72	5.31	1.3160	1.81	.30	.066
N	1.250	--	--	--	--	--	--	--	--

TABLE 1 - HOSE ASSEMBLY DIMENSIONS (CONTINUED)

HOSE ASSEMBLY AS5963 - SIZE CODE	SIZE	FITTING TYPE /17/	E MIN	E MAX	Ø F MAX /8/	FITTING BALL SIZE MIN THRU IN /7/	
						STRAIGHT	ELBOW
E	.250	--	--	--	--	--	--
E	.250	S	.74	.87	.88	.120	.113
E	.250	E	.81	.94	.88	.120	.113
G	.375	R	.74	.87	1.00	.120	.113
G	.375	S	.81	.94	1.00	.203	.192
G	.375	E	.99	1.12	1.00	.203	.192
H	.500	R	.81	.94	1.20	.203	.192
H	.500	S	.99	1.12	1.20	.297	.281
H	.500	E	1.14	1.34	1.20	.297	.281
J	.625	R	.99	1.12	1.41	.297	.281
J	.625	S	1.14	1.34	1.41	.369	.349
J	.625	E	1.35	1.55	1.41	.369	.349
K	.750	R	1.14	1.34	1.69	.369	.349
K	.750	S	1.35	1.55	1.69	.459	.434
K	.750	E	1.57	1.77	1.69	.459	.434
M	1.000	R	1.35	1.55	2.00	.459	.434
M	1.000	S	1.57	1.77	2.00	.675	.638
M	1.000	E	1.74	1.94	2.00	.675	.638
N	1.250	E	--	--	--	--	--
N	1.250	S	1.74	1.94	2.25	.833	.786
N	1.250	--	--	--	--	--	--

AS5963

TABLE 2 - HOSE AND SLEEVE OUTSIDE DIAMETER /10/

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	TOLERANCE	SIZE .250	SIZE .375	SIZE .500	SIZE .625	SIZE .750	SIZE 1.000	SIZE 1.250
-	(-) INDICATES HOSE ONLY NO SLEEVE (SEE AS5960) REF	400°F	MAX MIN	.510 .450	.620 .560	.760 .700	.960 .835	1.120 .995	1.430 1.305	1.685 1.560
C	FIRESLEEVE (AS1072 SIL-FG) (15 MIN) /11/ /12/ /14/	400°F	MAX MIN	.970 .810	1.090 1.000	1.220 1.060	1.500 1.260	1.590 1.470	1.950 1.780	2.190 1.940
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073-CODE B) /16/	275°F	MAX MIN	.560 .480	.700 .590	.910 .760	1.045 .895	1.205 1.080	1.530 1.370	1.785 1.660
H	FIRESLEEVE, INTEGRAL SILICONE (15 MIN) /14/	400°F	MAX MIN	.815 .755	.940 .880	1.060 1.000	1.200 1.075	1.420 1.295	1.740 1.615	2.000 1.875
K	INTEGRAL ABRASION SLEEVE (BRAIDED POLYESTER) /15/	300°F	MAX MIN	.590 .530	.710 .650	.860 .735	1.065 .885	1.205 1.130	1.530 1.405	1.815 1.690

TABLE 3 - HOSE ASSEMBLY LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in EXCLUSIVE	±.250 in
36 TO 50 in EXCLUSIVE	±.500 in
50 in AND OVER	±1%

TABLE 4 - WEIGHT (MAX)

HOSE OR SLEEVE CODE	HOSE OR TYPE SLEEVE	UNITS	SIZE	SIZE	SIZE	SIZE	SIZE	SIZE	SIZE
			.250	.375	.500	.625	.750	1.000	1.250
-	HOSE ONLY (SEE AS5960) REF	LB/IN	.022	.037	.046	.070	.105	.170	.220
C	TUBULAR FIRE SLEEVE AS1072 (15 min)	LB/IN	.017	.020	.022	.030	.035	.040	.042
F	ABRASION SLEEVE (AS1073-CODE B)	LB/IN	.003	.004	.005	.006	.008	.010	.015
H	FIRE SLEEVE INTEGRAL SILICONE ON HOSE (15 min)	LB/IN	.040	.060	.070	.095	.140	.220	.265
K	ABRASION SLEEVE, POLYESTER ON HOSE	LB/IN	.025	.040	.050	.070	.110	.180	.230
NONE	FIRE SLEEVE CLAMP	LB/EA	.020	.025	.025	.025	.032	.032	.035
NONE	FITTING END (STRAIGHT) /17/ /18/	R LB/EA	--	.082	.137	.221	.270	.520	--
		S LB/EA	.052	.092	.162	.247	.296	.542	.850
		E LB/EA	.063	.114	.188	.300	.320	.645	--
NONE	FITTING END (90° ELBOW) /17/ /18/	R LB/EA	--	.106	.173	.274	.333	.646	--
		S LB/EA	.066	.116	.198	.300	.360	.670	1.030
		E LB/EA	.087	.147	.241	.426	.446	.870	--

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE
CRES BRAID REINFORCED, 400 °F, 5080 PSI
FLARELESS, STRAIGHT TO 90° ELBOW

AS5963
SHEET 3 OF 5

TABLE 5 - INTEGRAL FIRESLEEVE CUFF DIMENSIONS /13/

HOSE SIZE	G MAX	H Ø MAX
04	2.56	1.04
06	2.68	1.17
08	2.88	1.29
10	3.32	1.45
12	3.38	1.65
16	3.38	1.98
20	3.81	2.23

NOTES:

1. MATERIALS:

- a. HOSE AND FITTINGS - PER AS5960.
- b. THE COLLARS/SOCKETS MAY BE STAINLESS STEEL.
- c. SLEEVES - SEE APPLICABLE STANDARDS, TABLE 2.

- /2/ THIS HOSE ASSEMBLY SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS5960. USERS OF THIS STANDARD SHALL PROCURE THE PRODUCT FROM ACCREDITED MANUFACTURERS, OR ACCREDITED DISTRIBUTORS, AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS5960 FOR THIS STANDARD WHEN ISSUED. PRIOR TO PRI-QPL ISSUANCE, USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS. WHEN ISSUED, REFER TO <http://www.pri.sae.org/as5960> FOR CURRENT PRI-QPL ONLINE.
3. CONSTRUCTION AND PERFORMANCE PER AS5960. FITTINGS SHALL BE PERMANENTLY ATTACHED TO HOSE.
4. OPERATING CHARACTERISTICS PER AS5960.
- /5/ MARKING: MARKING SHALL BE PER AS5960 ON A STAINLESS STEEL BAND NOT OVER 1.0 IN WIDE OR ON THE COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 IN HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOVEMENT AND RESULTANT CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND. HOSE ASSEMBLY DATE AND "PT" SYMBOL SHALL BE PERMANENTLY MARKED ON THE BAND OR ON AN END FITTING OR A FIRESLEEVE CLAMP.
- /6/ LENGTH "L" IS A FOUR DIGIT NUMBER OF WHICH THE FIRST THREE DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE FOURTH DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM "GAGE POINT" TO "CENTERLINE OF 90° ELBOW". FOR LENGTH TOLERANCES SEE TABLE 3. TO CONVERT FROM "GAGE POINT TO CENTERLINE" TO "END TO CENTERLINE" MEASUREMENT, ADD "D1" FOR NAS1760 END STYLE, OR "D2" FOR AS4458 GLOBESEAL END STYLE, TO LENGTH "L".
- /7/ HOSE ASSEMBLY INSIDE DIAMETER SHALL BE VERIFIED BY PASSING THE DESIGNATED, OR LARGER, SPHERICAL BALL PER TABLE 1 THROUGH THE HOSE ASSEMBLY.
- /8/ DISTANCE ACROSS CORNERS OF COUPLING NUT AND NIPPLE OR SOCKET/COLLAR HEX MAY EXCEED THIS DIMENSION.
- /9/ FITTING ENDS MUST COMPLY WITH NAS1760, AS4458, OR BE FUNCTIONALLY EQUIVALENT. DIMENSION D1 APPLIES TO NAS1760 AND D2 APPLIES TO AS4458. FITTINGS SHALL MATE WITH prEN6123 OR AS5827. STANDARD COUPLING NUTS SHALL BE IN ACCORDANCE WITH OR FUNCTIONALLY EQUIVALENT TO AS4370, AS1790, OR AS1792 EXCEPT FOR THREAD PITCH.
- /10/ DIAMETERS ARE LISTED FOR CLAMP SELECTION.