

RATIONALE

THIS STANDARD IS BASED ON THE AS1006 FITTING. IT INTRODUCES THE IMPROVED TOLERANCE END FITTING DESIGN AS5863 AND OTHER IMPROVEMENTS.

SAE AS6046

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


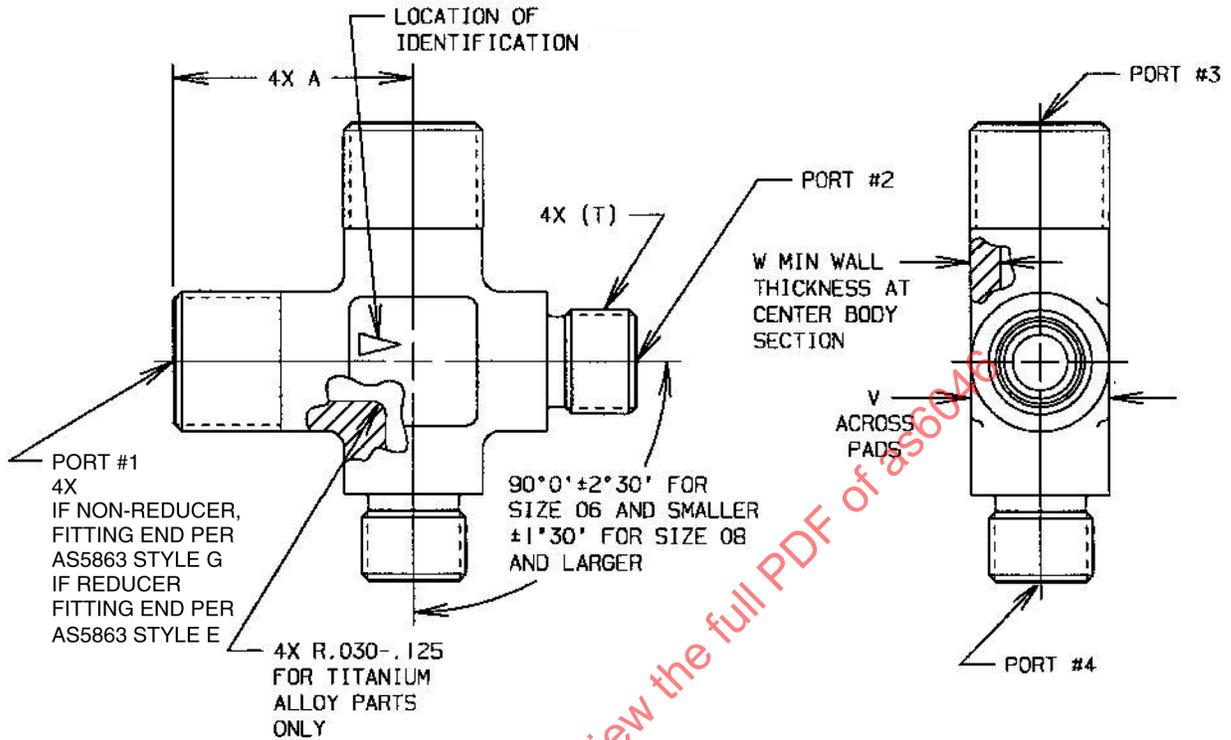


FIGURE 1 - FITTING, CROSS, PORT #2 AND PORT #4 SHOWN AS REDUCER

SAENORM.COM : Click to view the full PDF of AS6046

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS6046>

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /5/ AS18280

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, CROSS,
STANDARD AND REDUCER,
FLARELESS, PRECISION TYPE

SAE AS6046
SHEET 1 OF 4

ISSUED 2009-12

TABLE 1 - DIMENSIONS AND WEIGHTS /9/ /10/

BASIC NO. AS6046 /19/ SIZE CODE	V	W	LB/EA APPROX REF ALUM	LB/EA APPROX REF STEEL	LB/EA APPROX REF TI
02	.297- .314	.090	.0180	.0516	.0285
03	.360- .377	.100	.0273	.0783	.0432
04	.423- .440	.110	.0356	.102	.0565
05	.485- .502	.120	.0477	.137	.0755
06	.547- .565	.120	.0604	.173	.0956
08	.735- .753	.150	.122	.349	.193
10	.860- .878	.170	.156	.447	.246
12	1.047-1.065	.185	.265	.762	.420
14	1.173-1.191	.200	.330	.950	.522
16	1.292-1.317	.205	.391	1.12	.619
20	1.605-1.630	.240	.631	1.81	1.00
24	1.855-1.880	.250	.770	2.21	1.22
32	2.542-2.572	.350	1.70	4.87	2.69

TABLE 2 - LEG LENGTH A /9/ /11/

FORGING SIZE	TUBE SIZE OF PORT #1, #2, #3, OR #4												
	02	03	04	05	06	08	10	12	14	16	20	24	32
02	.773	-	-	-	-	-	-	-	-	-	-	-	-
03	.789	.836	-	-	-	-	-	-	-	-	-	-	-
04	.820	.867	.898	-	-	-	-	-	-	-	-	-	-
05	.883	.930	.961	.961	-	-	-	-	-	-	-	-	-
06	.961	1.008	1.039	1.039	1.055	-	-	-	-	-	-	-	-
08	1.086	1.133	1.164	1.164	1.180	1.273	-	-	-	-	-	-	-
10	1.180	1.226	1.258	1.258	1.274	1.367	1.430	-	-	-	-	-	-
12	1.272	1.320	1.351	1.351	1.367	1.460	1.523	1.586	-	-	-	-	-
14	1.398	1.445	1.476	1.476	1.492	1.585	1.648	1.742	1.680	-	-	-	-
16	1.429	1.476	1.507	1.507	1.523	1.616	1.679	1.742	1.742	1.742	-	-	-
20	1.585	1.632	1.663	1.663	1.679	1.772	1.835	1.898	1.898	1.898	1.898	-	-
24	1.710	1.757	1.788	1.788	1.804	1.897	1.960	2.023	2.023	2.023	2.023	2.023	-
32	2.148	2.195	2.226	2.226	2.242	2.335	2.398	2.461	2.461	2.461	2.461	2.461	2.461

SAENORM.COM · Click to view the full PDF of as6046

TABLE 3 - TUBE SIZE AND CORRESPONDING THREAD

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD ISO 3161
02	.125	.3125-24 UNJF
03	.188	.3750-24 UNJF
04	.250	.4375-20 UNJF
05	.312	.5000-20 UNJF
06	.375	.5625-18 UNJF
08	.500	.7500-16 UNJF
10	.625	.8750-14 UNJF
12	.750	1.0625-12 UNJ
14	.875	1.8750-12 UNJ
16	1.000	1.3125-12 UNJ
20	1.250	1.6250-12 UNJ
24	1.500	1.8750-12 UNJ
32	2.000	2.5000-12 UNJ

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

- a. CODE LETTER T – TYPE 6AL-4V TITANIUM ALLOY PER PROCUREMENT SPECIFICATION
- b. CODE LETTER V – TYPE 15-5PH, CORROSION RESISTANT STEEL PER PROCUREMENT SPECIFICATION
- c. CODE LETTER W – TYPE 7075-T73 ALUMINUM ALLOY BAR OR FORGING, OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER PROCUREMENT SPECIFICATION

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER T – ANNEALED PER PROCUREMENT SPECIFICATION
- b. MATERIAL CODE LETTER V – AGE TO CONDITION H1075 PER PROCUREMENT SPECIFICATION
- c. MATERIAL CODE LETTER W – T73 OR T7351 PER PROCUREMENT SPECIFICATION

/3/ FINISH:

- a. MATERIAL CODE LETTER T – ANODIZE OR FLUORIDE PHOSPHATE CONVERSION COAT PER PROCUREMENT SPECIFICATION
- b. MATERIAL CODE LETTER V:
 - 1. V CODE PARTS TO BE PASSIVATED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: PASSIVATE PER PROCUREMENT SPECIFICATION
 - 2. V CODE PARTS TO BE CADMIUM PLATED ONLY SHALL HAVE THE FINISH CODE LETTER "P" AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: CADMIUM PLATE PER PROCUREMENT SPECIFICATION
- c. MATERIAL CODE LETTER W – ANODIZE PER PROCUREMENT SPECIFICATION

/4/ OXYGEN SYSTEM AND COMPONENT CLEANING, SUFFIX LETTER A /19/:

- a. MATERIAL CODE LETTER P – CLEAN AND PACKAGE PER ARP1176 CATEGORY 1C
- b. MATERIAL CODE LETTER W – CLEAN AND PACKAGE PER ARP1176 CATEGORY 2

/5/ PROCUREMENT SPECIFICATION: AS18280 UNLESS OTHERWISE SPECIFIED ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS18280 FOR THIS STANDARD. SEE <http://www.eauditnet.com> FOR CURRENT QPL ONLINE.