

RATIONALE

THIS SAE AEROSPACE STANDARD (AS) ESTABLISHES THE REQUIREMENTS FOR THE TEE FITTING WITH 37 DEGREE SPHERICAL FLARED TUBE.

SAE AS6095

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


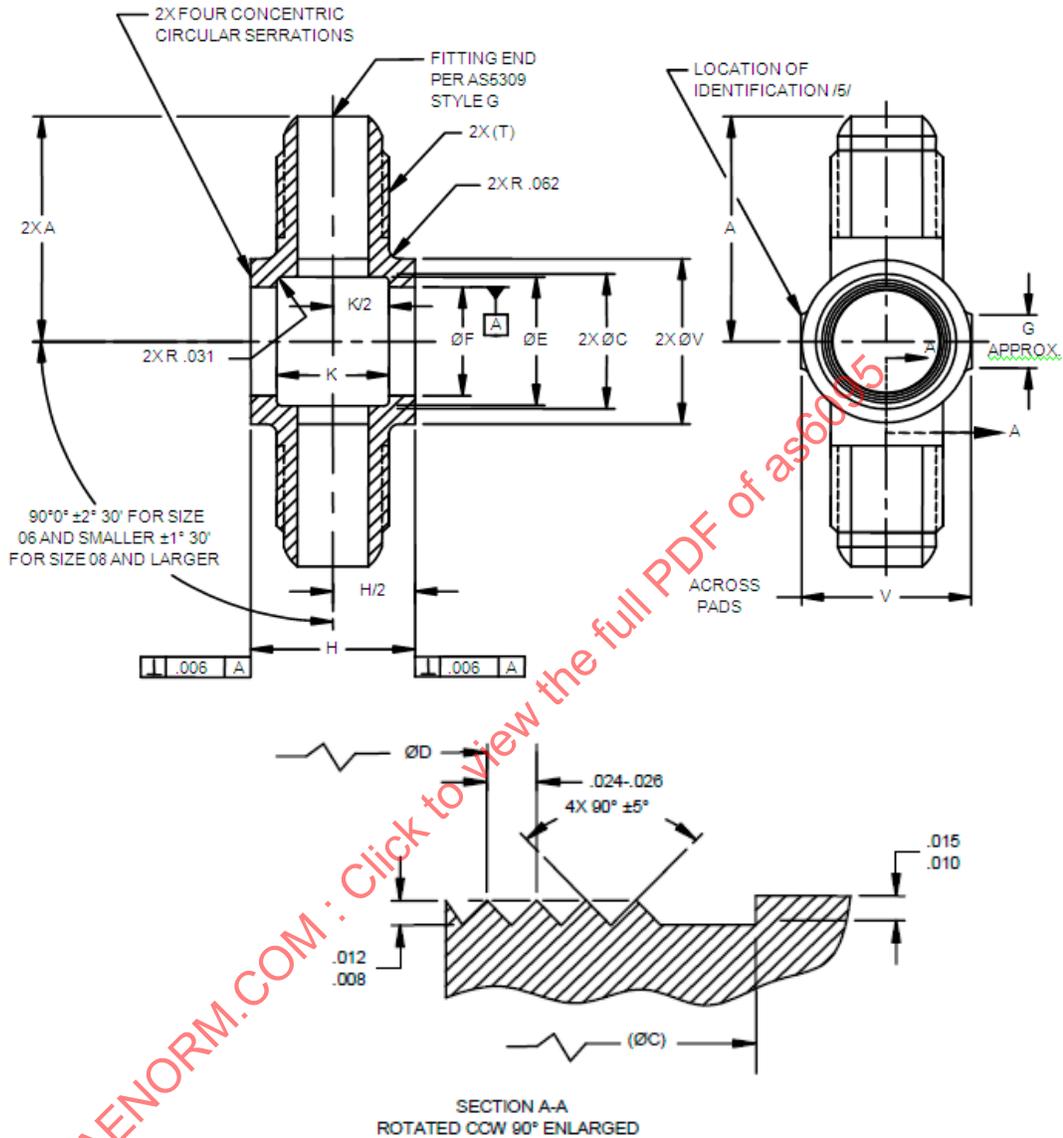


FIGURE 1 - FITTING, CONNECTOR, TEE

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS6095>

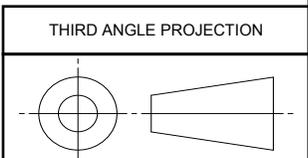

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS6076

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

FITTING, 37° SPHERICAL FLARED,  
CONNECTOR, MULTIPLE  
FLUID PRESSURE LINE, TEE

**SAE AS6095**  
SHEET 1 OF 3

TABLE 1A - DIMENSIONS

BASIC NO. AS6095 /13/ SIZE CODE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A	A ±.023	C ±.005	D ±.005	E	F ±.001
04	.250	.4375-20 UNJF	1.148	.692	.474	.562	.439
05	.312	.5000-20 UNJF	1.148	.755	.536	.625	.501
06	.375	.5625-18 UNJF	1.273	.817	.599	.750	.564
08	.500	.7500-16 UNJF	1.460	1.005	.786	.937	.751
10	.625	.8750-14 UNJF	1.680	1.130	.911	1.125	.876
12	.750	1.0625-12 UNJ	2.023	1.318	1.099	1.375	1.063
16	1.000	1.3125-12 UNJ	2.398	1.568	1.349	1.687	1.313

TABLE 1B - DIMENSIONS AND WEIGHTS

BASIC NO. AS6095 /13/ SIZE CODE	G	H ±.010	K	V	LB/EA APPROX. REF AL	LB/EA APPROX. REF STEEL	LB/EA APPROX. REF TI
04	.437	.750	.375	.797-.815	.0334	.0958	.0528
05	.437	.750	.500	.797-.815	.0301	.0863	.0476
06	.500	.875	.500	.985-1.003	.0492	.141	.0779
08	.500	1.125	.750	1.173-1.191	.0822	.236	.130
10	.625	1.375	.812	1.355-1.380	.130	.374	.206
12	.625	1.625	1.000	1.668-1.693	.224	.642	.354
16	.812	2.125	1.500	2.042-2.072	.366	1.05	.580

NOTES:

## NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

- a. CODE LETTER F - TYPE 4130 ALLOY STEEL FORGING OR BAR PER AMS-S-6758 OR AMS6370; OR TYPE 4140 PER AMS6382. /2/
- b. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS5639.
- c. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS5648.
- d. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS5645.
- e. CODE LETTER T - TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS4928.
- f. CODE LETTER W - TYPE 7075-T73 ALUMINUM ALLOY PER AMS4141; OR TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9; OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124. /2/

/2/ HEAT TREATMENT:

- a. MATERIAL CODE LETTER F - SEE HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- b. MATERIAL CODE LETTER W - SEE ELECTRICAL CONDUCTIVITY AND HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- c. OTHER MATERIAL CODE LETTERS - NONE.

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS6095</b> SHEET 2 OF 3	
	FITTING, 37° SPHERICAL FLARED, CONNECTOR, MULTIPLE FLUID PRESSURE LINE, TEE		