

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
4720

REV.
A

AS623

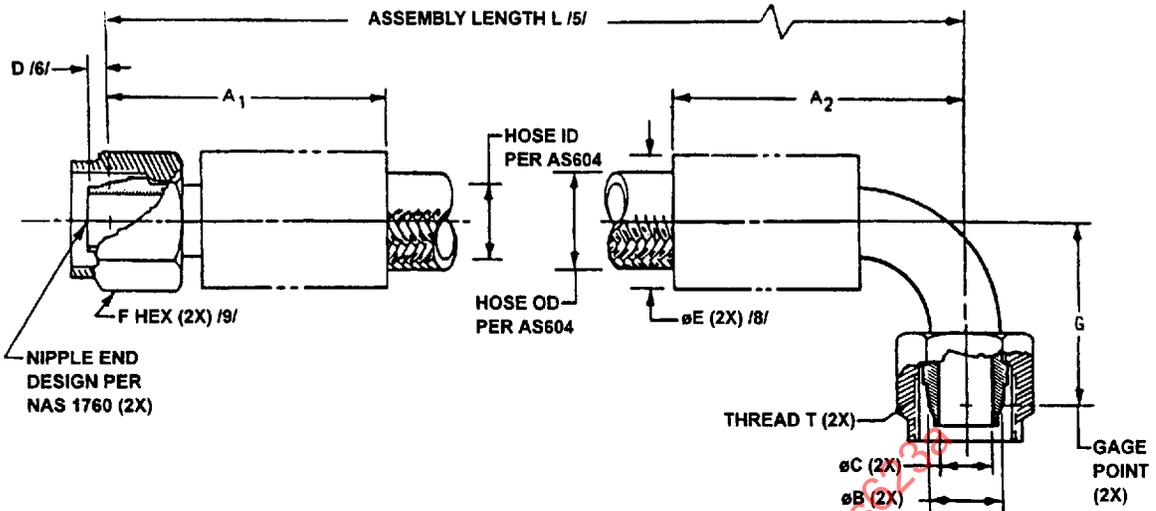


FIGURE 1 - HOSE AND FITTING DIMENSIONS

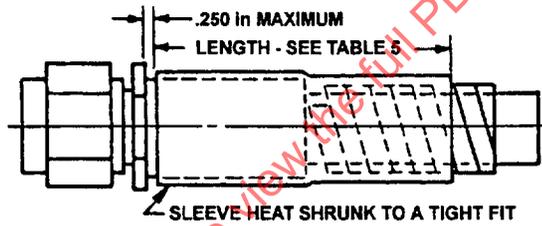


FIGURE 2 - TUBULAR/COIL ABRASION END /10/ /11/

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSEMBLY SIZE (REF)	THREAD T PER MIL-S-8879 (REF)	A		B GAGE BASIC	C /7/ MIN	D (REF)	E	
			A ₁ MAX	A ₂ MAX				MAX WITHOUT SLEEVING	F HEX (REF)
AS623-04	.250	.4375-20 UNJF-3B	1.56	1.58	.2930	.135	.16	.88	.56
AS623-06	.375	.5625-18 UNJF-3B	1.80	1.80	.4120	.240	.16	1.00	.69
AS623-08	.500	.7500-16 UNJF-3B	2.06	2.40	.5600	.340	.19	1.20	.88
AS623-10	.625	.8750-14 UNJF-3B	2.44	3.04	.6730	.410	.20	1.41	1.00
AS623-12	.750	1.0625-12 UNJ-3B	2.56	3.35	.8100	.510	.23	1.69	1.25
AS623-16	1.00	1.3125-12 UNJ-3B	3.00	4.26	1.0620	.760	.30	2.00	1.50
AS623-20	1.25	1.6250-12 UNJ-3B	3.00	4.72	1.3160	.925	.30	2.13	2.00

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS604 /2/



AEROSPACE STANDARD

(R) HOSE ASSEMBLY, 3000 psi, TFE, FLARELESS, STRAIGHT TO 90°, HEAVYWEIGHT

AS623
SHEET 1 OF 5

REV. A

Copyright 1999 Society of Automotive Engineers, Inc. All rights reserved.

QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:

(724) 772-8510
(724) 776-4870

FAX: (724) 776-0243
E-MAIL: (724) 776-0700

Distributed under license from the IHS Archive

SAE WEB ADDRESS: <http://www.sae.org>

Printed in the U.S.A.

ISSUED 1984-07 REVISED 1999-01

REV. A
AS623

TABLE 1 (CONTINUED)

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSEMBLY SIZE (REF)	G MIN	G MAX	INSPECTION BALL SIZE /7/ STRAIGHT END FITTING	INSPECTION BALL SIZE /7/ ELBOW END FITTING
				DIA IN	DIA IN
AS623-04	.250	.69	.88	.122	.115
AS623-06	.375	.88	1.09	.216	.204
AS623-08	.500	1.00	1.31	.306	.289
AS623-10	.625	1.19	1.50	.369	.349
AS623-12	.750	1.38	1.75	.459	.434
AS623-16	1.00	1.69	2.06	.684	.646
AS623-20	1.25	2.51	2.57	.833	.786

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETER /14/

SLEEVE CODE	SLEEVE MATERIAL	TEMP. LIMIT °F	HOSE SIZE .250	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.00	HOSE SIZE 1.25
NONE	(-) INDICATES HOSE ONLY, NO SLEEVE	400	.455	.595	.735	.935	1.090	1.410	1.650
			.395	.535	.675	.875	1.030	1.350	1.590
A	ABRASION SLEEVE TUBULAR (TFE-AS1291-CODE B) /10/	400	.540	.715	.855	1.025	1.195	1.515	1.825
			.468	.635	.770	.960	1.125	1.445	1.755
B	ABRASION SLEEVE COIL (NYLON AS1294) /11/	275	.509	.684	.809	1.005	1.170	1.492	1.750
			.413	.584	.733	.923	1.088	1.408	1.690
C	FIRE SLEEVE (AS1072 SIL-FG) (15 min) /12/ /13/ /18/	400	.688	.875	1.000	1.250	1.375	1.750	2.000
			.562	.750	.875	1.125	1.250	1.625	1.875
E	ABRASION SLEEVE SHRINK-ON (FEP) /16/	350	.458	.638	.773	.973	1.148	1.438	1.688
			.417	.592	.727	.927	1.102	1.392	1.632
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /16/	275	.490	.670	.795	.997	1.174	1.482	1.740
			.440	.610	.745	.937	1.112	1.428	1.680
G	FIRE SLEEVE (AS1072 SIL-FG) (5 min) /12/ /13/ /17/	400	.688	.875	1.000	1.250	1.375	1.750	2.000
			.562	.750	.875	1.125	1.250	1.625	1.875
H	FIRE SLEEVE INTEGRAL SILICONE (15 min) /18/	400	.700	.880	1.000	1.203	1.343	1.656	1.906
			.640	.820	.940	1.143	1.283	1.596	1.846
J	FIRE SLEEVE INTEGRAL SILICONE (5 min) /17/	400	.705	.880	1.005	1.217	1.382	1.748	1.906
			.645	.820	.945	1.143	1.280	1.593	1.846
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /15/	300	.505	.675	.795	.985	1.150	1.470	1.720
			.480	.645	.765	.955	1.120	1.440	1.680
L	ABRASION SLEEVE COIL (PTFE-AS1293) /11/	400	.522	.692	.817	1.007	1.172	1.492	1.750
			.449	.622	.747	.937	1.102	1.422	1.690

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

(R) HOSE ASSEMBLY, 3000 psi, TFE, FLARELESS, STRAIGHT TO 90°, HEAVYWEIGHT

AS623
SHEET 2 OF 5

REV. A

REV. A

AS623

TABLE 3 - ASSEMBLY LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in, EXCLUSIVE	±.250 in
36 TO 50 in, EXCLUSIVE	±.500 in
50 in AND OVER	±1%

TABLE 4 - WEIGHTS (NOMINAL)

HOSE OR SLEEVE CODE	HOSE OR TYPE SLEEVE	UNITS	HOSE SIZE							
			.250	.375	.500	.625	.750	1.00	1.25	
NONE	HOSE ONLY	LB/IN	.012	.028	.040	.062	.086	.140	.154	
A	ABRASION SLEEVE (TFE-AS1291-B)	LB/IN	.003	.004	.004	.005	.007	.009	.011	
B	ABRASION SLEEVE (NYLON AS1294)	LB/IN	.001	.002	.003	.003	.004	.005	.007	
C	FIRESLEEVE (15 min) AS1072	LB/IN	.007	.010	.011	.015	.017	.021	.025	
E	ABRASION SLEEVE (FEP)	LB/IN	.002	.003	.003	.005	.006	.007	.009	
F	ABRASION SLEEVE (AS1073B)	LB/IN	.002	.003	.003	.004	.005	.006	.008	
G	FIRESLEEVE (5 min) AS1072	LB/IN	.007	.010	.011	.015	.017	.021	.025	
H	FIRESLEEVE INTEGRAL (15 min) ON HOSE	LB/IN	.022	.042	.056	.081	.102	.154	.190	
J	FIRESLEEVE INTEGRAL (5 min) ON HOSE	LB/IN	.022	.042	.056	.081	.102	.154	.190	
K	ABRASION SLEEVE POLYESTER WITH HOSE	LB/IN	.013	.028	.039	.060	.082	.130	.160	
L	ABRASION SLEEVE (PTFE-AS1293)	LB/IN	.003	.004	.005	.005	.006	.007	.009	
NONE	FIRESLEEVE CLAMP (*)	LB/EA	.020	.020	.025	.026	.026	.033	.038	
NONE	FITTING END (STRAIGHT) (*)	LB/EA	.070	.117	.172	.266	.520	.713	1.400	
NONE	FITTING END (90°) (*)	LB/EA	.078	.136	.233	.327	.615	.945	1.710	

(*) NOTE: FIRESLEEVE CLAMP AND FITTING END ARE IN POUNDS EACH.

TABLE 5 - SLEEVE LENGTH

HOSE SIZE	LENGTH (INCHES)
.250	2.00 ± .25
.375	
.500	2.50 ± .25
.625	
.750	3.00 ± .25
1.00	
1.25	3.50 ± .25

REV. A

AS623

NOTES:

1. MATERIALS:
 - a. HOSE AND FITTINGS PER AS604
 - b. SLEEVES - SEE APPLICABLE STANDARD PER TABLE 2
- /2/ THIS HOSE ASSEMBLY SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS604. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.
3. MARKING SHALL BE PER AS604 ON A STAINLESS STEEL BAND NOT OVER 1.0 in WIDE, OR ON THE COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 in HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOVEMENT AND RESULTANT CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND. HOSE ASSEMBLY DATE AND "PT" SYMBOL SHALL BE ELECTROETCHED OR STAMPED ON THE BAND OR ON AN END FITTING OR A FIRESLEEVE CLAMP.
4. CONSTRUCTION AND PERFORMANCE PER AS604. FITTINGS SHALL BE PERMANENTLY ATTACHED TO THE HOSE.
- /5/ LENGTH "L" IS A FOUR DIGIT NUMBER OF WHICH THE FIRST THREE DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE FOURTH DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM "GAGE POINT" TO "GAGE POINT." FOR LENGTH TOLERANCES SEE TABLE 3.
- /6/ TO CONVERT "GAGE POINT" TO "GAGE POINT" TO "END TO END" MEASUREMENT, ADD "D" TO LENGTH "L".
- /7/ HOSE ASSEMBLY INSIDE DIAMETER SHALL BE VERIFIED BY PASSING THE DESIGNATED, OR LARGER, SPHERICAL BALL PER TABLE 1 THROUGH THE HOSE ASSEMBLY.
- /8/ DISTANCE ACROSS CORNERS OF THE COUPLING NUT MAY EXCEED THIS DIMENSION.
- /9/ STANDARD COUPLING NUTS SHALL BE IN ACCORDANCE WITH MS21921 OR AS4073. NONSTANDARD COUPLING NUTS MAY BE USED, PROVIDED THEY ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT, AND PROVIDED THEY CANNOT BE REMOVED FROM THE FITTING.
- /10/ TUBULAR ABRASION (TFE) SLEEVES SHALL HAVE AN ID NO GREATER THAN HOSE OD + .05 in. AXIAL MOVEMENT OF THE SLEEVE INSTALLED ON THE HOSE SHALL NOT EXCEED .05 in. ENDS OF THE TUBULAR SLEEVE SHALL BE TERMINATED WITH A LENGTH OF MIL-I-23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR, PER TABLE 5 AND FIGURE 2.
- /11/ COIL ABRASION SLEEVES, WHEN ASSEMBLED ON A STRAIGHT HOSE, SHALL HAVE AN AVERAGE GAP BETWEEN COILS NOT EXCEEDING .05 in. DISPLACEMENT OF THE COILS OF THE SLEEVE, CAUSING A GREATER GAP, SHALL NOT BE CAUSE FOR REJECTION IF THE COILS CAN BE REPOSITIONED TO MEET THE GAP REQUIREMENTS. ENDS OF THE COIL SLEEVE SHALL BE TERMINATED WITH A LENGTH OF HEAT SHRINKABLE SLEEVING IN ACCORDANCE WITH TABLE 5 AND FIGURE 2. CODE "B" (NYLON COIL) ABRASION SLEEVES SHALL BE TERMINATED WITH MIL-I-23053/5, CLASS 1 OR 3, COLOR BLACK. CODE "L" (COIL ABRASION) SLEEVES SHALL BE TERMINATED WITH MIL-I-23053/12A CLASS 1, COLOR TRANSPARENT, PTFE (OPTIONAL MIL-I-23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR).
- /12/ THE TABLE 2 SLEEVE DIAMETERS FOR AS1072 SLEEVES APPLY WHEN THE SLEEVE IS COMPRESSED, OR CLAMPED, TO CONTACT THE HOSE. IN THIS CASE A WRINKLE MAY OCCUR OVER APPROXIMATELY 10% OF THE SLEEVE CIRCUMFERENCE.
- /13/ THE CUT ENDS OF THE FIRESLEEVE SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION, TO PREVENT WICKING OF FLUIDS. THE FIRESLEEVE ENDS SHALL BE SECURED TO THE HOSE ASSEMBLY END FITTINGS WITH CORROSION RESISTANT STEEL BANDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRESLEEVE, WHICH EXPOSE THE FIBERGLASS, SHALL BE COATED WITH RTV SILICONE RUBBER.
- /14/ DIAMETERS ARE LISTED FOR CLAMP SELECTION. TUBULAR SLEEVES MAY NOT BE A PERFECT ROUND AND SHALL BE MEASURED WITH A DIAMETER TAPE RULER (OFTEN REFERRED TO AS PI-TAPE).
- /15/ INTEGRAL ABRASION SLEEVE SHALL FORM AN INTEGRAL, PERMANENT PART OF THE HOSE AND SHALL TERMINATE A MAXIMUM OF .200 in FROM THE END OF THE COLLAR.
- /16/ FEP AND POLYOLEFIN SHRINK ABRASION SLEEVES SHALL BE SHRUNK TO A SNUG FIT OVER THE HOSE AND END FITTING COLLARS.
- /17/ ADD "AS1055 TYPE IIb CLASS A-S/P" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE RESISTANT" (5 min), WITH AS1055.
- /18/ ADD "AS1055 TYPE IIb CLASS B-S/P" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE PROOF" (15 min), WITH AS1055.
19. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

 <p>SAE The Engineering Society For Advancing Mobility Land Sea Air and Space INTERNATIONAL 400 Commonwealth Drive, Warrendale, PA 15096-0001</p>	<p>AEROSPACE STANDARD</p> <p>(R) HOSE ASSEMBLY, 3000 psi, TFE, FLARELESS, STRAIGHT TO 90°, HEAVYWEIGHT</p>	<p>AS623 SHEET 4 OF 5</p>	<p>REV. A</p>
--	---	--------------------------------------	----------------------