

FEDERAL SUPPLY CLASS
4720

AS647

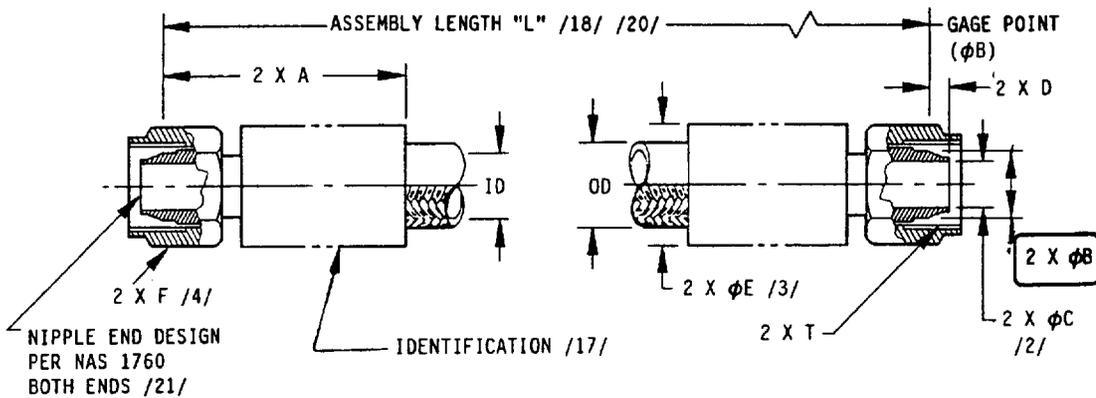


FIGURE 1 - HOSE ASSEMBLY

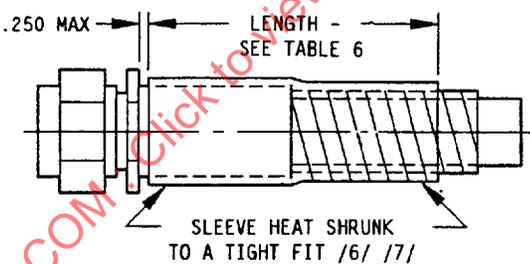


FIGURE 2 - ABRASION SLEEVE ATTACHMENT


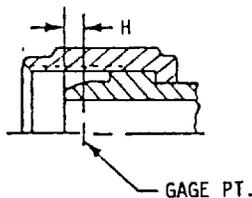


FIGURE 3 - SEE TABLE 7

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: /14/ AS1946

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096 0001

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
METAL BRAID, MEDIUM PRESSURE, FLARELESS,
STRAIGHT TO STRAIGHT

AS647

SHEET 1 OF 6

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REVISED

ISSUED 1994-02

AS647

TABLE 1 - DIMENSIONS

BASIC NUMBER AS647 SIZE CODE /25/	(NOMINAL TUBE DIA)	THREAD PER MIL-S-8879	ID MIN	A MAX	B BASIC	C MIN /2/	(D)	E MAX WITHOUT SLEEVEING /3/	(F) HEX ACROSS FLATS	BALL SIZE MIN THRU DIA /2/ MS19059 DASH NO.	BALL SIZE MIN THRU DIA /2/
03	.188	.3750-24UNJF-3B	.110	1.25	.2340	.080	.14	.49	.500	4804	.063
04	.250	.4375-20UNJF-3B	.173	1.21	.2930	.132	.16	.55	.562	4806	.094
05	.313	.5000-20UNJF-3B	.235	1.35	.3500	.193	.16	.63	.625	4810	.156
06	.375	.5625-18UNJF-3B	.298	1.45	.4120	.256	.16	.70	.688	4813	.219
08	.500	.7500-16UNJF-3B	.391	1.72	.5600	.340	.19	.83	.875	4815	.281
10	.675	.8750-14UNJF-3B	.485	1.93	.6730	.430	.20	.97	1.000	4818	.375
12	.750	1.0625-12UNJ-3B	.615	2.17	.8100	.548	.23	1.17	1.250	4822	.500
16	1.000	1.3125-12UNJ-3B	.851	2.55	1.0620	.778	.30	1.52	1.500	4830	.750
20	1.250	1.6250-12UNJ-3B	1.101	2.43	1.3160	1.000	.30	2.00	2.000	4838	1.000
24	1.500	1.8750-12UNJ-3B	1.344	2.68	1.5650	1.250	.37	2.28	2.125	4842	1.250

TABLE 2 - TOLERANCES

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in	±.250 in
36 TO 50 in	±.500 in
OVER 50 in	±1%

AS647

TABLE 3 - HOSE AND SLEEVE CODES /1/

HOSE OR SLEEVE CODE	SLEEVE MATERIAL	TEMP. LIMIT °F
-	(-) INDICATES HOSE ONLY, NO SLEEVE (AS639)	450
A	ABRASION SLEEVE TUBULAR (PTFE - AS1291 - CODE B) /6/	450
B	ABRASION SLEEVE COIL (NYLON AS1294) /7/	275
C	FIRE SLEEVE (AS1072 SIL-FG) (15 min) /8/ /9/ /13/	450
E	ABRASION SLEEVE SHRINK-ON (FEP) /11/	350
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /11/	275
G	FIRE SLEEVE (AS1072 SIL-FG) (5 min) /8/ /9/ /13/	450
H	FIRE SLEEVE INTEGRAL SILICONE (AS1723) (15 min) /13/	450
J	FIRE SLEEVE INTEGRAL SILICONE (5 min) /12/	450
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /10/	300
L	ABRASION SLEEVE COIL (PTFE - AS1293) /7/	450

TABLE 4 - HOSE AND SLEEVE OUTSIDE DIAMETERS

HOSE OR SLEEVE CODE	TOLERANCE	HOSE SIZE									
		/5/	/5/	/5/	/5/	/5/	/5/	/5/	/5/	/5/	/5/
-	MAX	.285	.343	.406	.469	.585	.687	.812	1.140	1.390	1.707
	MIN	.234	.304	.367	.430	.546	.641	.766	1.078	1.328	1.637
A	MAX	.390	.473	.524	.620	.715	.818	.955	1.295	1.550	1.841
	MIN	.320	.393	.454	.515	.645	.748	.870	1.210	1.450	1.771
B	MAX	.339	.409	.472	.535	.669	.767	.896	1.224	1.474	1.807
	MIN	.260	.330	.393	.456	.590	.681	.810	1.122	1.372	1.681
C	MAX	.692	.692	.780	.840	.970	1.090	1.220	1.590	1.900	2.190
	MIN	.533	.533	.598	.658	.778	.908	1.038	1.288	1.658	1.898
E	MAX	.301	.375	.438	.507	.635	.749	.887	1.228	1.440	1.761
	MIN	.248	.320	.383	.452	.578	.679	.811	1.146	1.358	1.667
F	MAX	.341	.411	.474	.547	.663	.769	.904	1.244	1.482	1.823
	MIN	.278	.348	.411	.484	.600	.699	.834	1.158	1.396	1.729
G	MAX	.692	.692	.780	.840	.970	1.090	1.220	1.590	1.900	2.190
	MIN	.533	.533	.598	.658	.778	.908	1.038	1.288	1.658	1.898
H	MAX	.641	.641	.704	.766	.891	1.016	1.141	1.454	1.704	2.016
	MIN	.594	.594	.657	.719	.844	.969	1.074	1.394	1.649	1.959
J	MAX	.641	.641	.704	.766	.891	1.016	1.141	1.454	1.704	2.016
	MIN	.594	.594	.657	.719	.844	.969	1.074	1.394	1.649	1.959
K	MAX	.378	.430	.499	.559	.665	.772	.887	1.210	1.460	1.782
	MIN	.320	.390	.450	.520	.625	.726	.841	1.148	1.398	1.712
L	MAX	.375	.445	.508	.571	.687	.789	.914	1.242	1.492	1.809
	MIN	.267	.333	.407	.470	.586	.681	.828	1.138	1.388	1.697

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
METAL BRAID, MEDIUM PRESSURE, FLARELESS,
STRAIGHT TO STRAIGHT

AS647

SHEET 3 OF 6

AS647

TABLE 5 - MAXIMUM WEIGHT

HOSE OR SLEEVE CODE OR FITTING	UNITS	HOSE SIZE .188	HOSE SIZE .250	HOSE SIZE .313	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.000	HOSE SIZE 1.250	HOSE SIZE 1.500	
-	LB/IN	.005	.007	.008	.010	.012	.016	.020	.045	.058	.074	
A	LB/IN	.003	.004	.004	.006	.007	.008	.010	.014	.020	.045	
B	LB/IN	.001	.001	.002	.002	.003	.004	.004	.005	.006	.009	
C	LB/IN	.009	.009	.011	.012	.017	.018	.028	.030	.040	.037	
E	LB/IN	.001	.002	.002	.002	.003	.004	.006	.007	.007	.008	
F	LB/IN	.002	.002	.002	.002	.003	.003	.005	.006	.006	.007	
G	LB/IN	.009	.009	.011	.012	.017	.018	.028	.030	.040	.037	
H	LB/IN	.016	.018	.020	.023	.030	.037	.045	.085	.107	.132	
J	LB/IN	.016	.017	.018	.021	.027	.035	.042	.079	.100	.123	
K	LB/IN	.006	.008	.009	.011	.015	.018	.023	.050	.063	.081	
L	LB/IN	.003	.004	.004	.005	.008	.009	.011	.018	.022	.028	
FIRE SLEEVE CLAMP	LB/EA	.015	.016	.018	.019	.021	.023	.025	.029	.033	.037	
FITTING	LB	CLASS I	.040	.055	.075	.085	.155	.235	.330	.535	.995	1.370
END STR /25/	EA	CLASS II	--	--	--	.050	.073	.117	.164	.255	.473	.638

TABLE 6 - SLEEVE LENGTH

HOSE SIZE	LENGTH
.188, .250, .313, .375	2.00 ± .25
.500, .625	2.50 ± .25
.750, 1.000	3.00 ± .25
1.250, 1.500	4.00 ± .25

TABLE 7 - DIMENSION H (SEE FIGURE 3)

SIZE CODE	H
3	.085
4	.062
5	.058
6	.059
8	.064
10	.078
12	.069
16	.132
20	.090
24	.134