

RATIONALE

AS7974/4 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-7974/4 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-7974/4. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.


THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

ANY MATERIAL RELATING TO QUALIFIED PRODUCT LISTS HAS NOT BEEN ADOPTED BY SAE. THIS MATERIAL WAS PART OF THE ORIGINAL MILITARY SPECIFICATION AND IS REPRINTED HERE FOR HISTORIC REFERENCE ONLY.

SAENORM.COM : Click to view the full PDF of as7974\_4

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS7974/4>

THIRD ANGLE PROJECTION

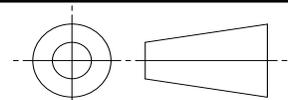

CUSTODIAN: AE-8/AE-8A



**AEROSPACE STANDARD**

CABLE ASSEMBLY, EXTERNAL ELECTRIC POWER, AIRCRAFT, SINGLE-JACKETED 115/200 VOLT, 400 HERTZ

**SAE AS7974/4**  
SHEET 1 OF 8

ISSUED 1998-01 REAFFIRMED 2012-12

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**SAE AS7974/4**

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-7974.


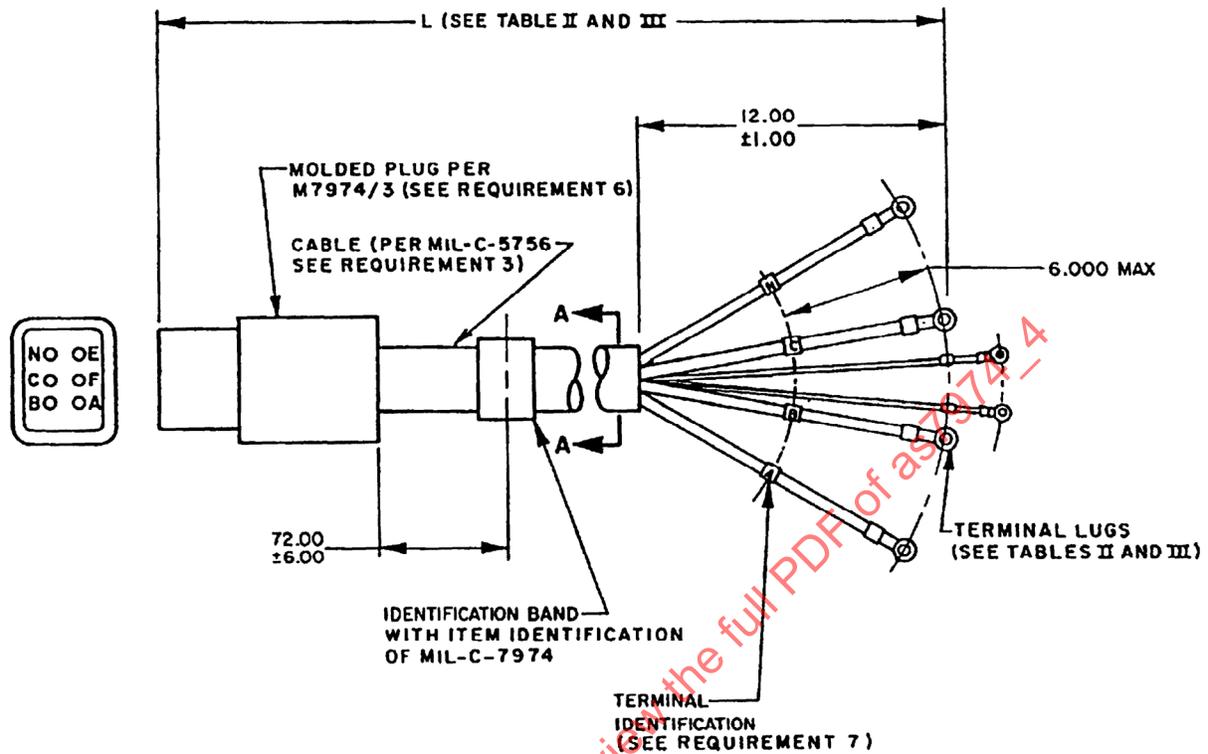



FIGURE 1. CABLE ASSEMBLY.

SAENORM.COM : Click to view the full PDF of as7974-4

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS7974/4</b> SHEET 2 OF 8
	CABLE ASSEMBLY, EXTERNAL ELECTRIC POWER, AIRCRAFT, SINGLE-JACKETED 115/200 VOLT, 400 HERTZ	

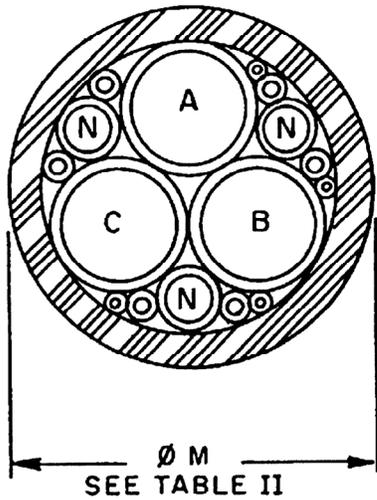

TYPE I, STYLE A AND B  
CONSTRUCTION MIL-C-5756/5  
CABLE (SEE REQUIREMENT 3)

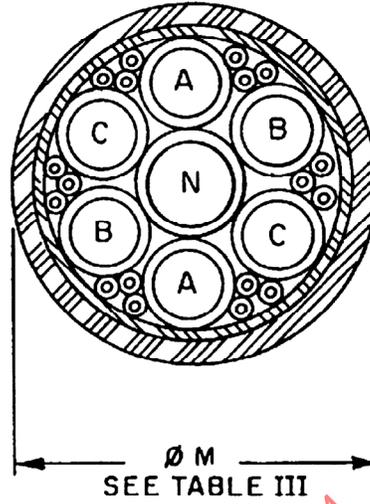

TYPE II, STYLE C  
CONSTRUCTION MIL-C-5756/5  
CABLE (SEE REQUIREMENT 3)

## SECTION A-A

FIGURE 2. CROSS-SECTION OF CABLE.


TABLE I. METRIC CONVERSION.

INCH	MM	INCH	MM	FEET	CM	FEET	CM
1.000	25.40	1.980	50.29	0.50	15.2	60.0	1829
1.555	39.50	6.000	152.4	20.0	610	72.0	2195
1.660	42.16	12.00	304.8	30.0	914	80.0	2438
				40.0	1219	100.0	3048

SAENORM.COM : Click to view the full PDF of as7974-4

PLUG END

LUG END

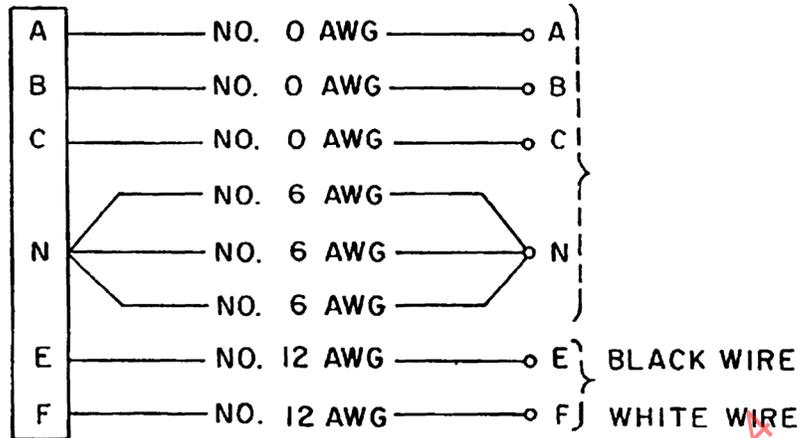


For assemblies without control leads, contacts E and F are electrically connected in the connector head using an AWG 12 (minimum) conductor.

Wiring Diagram for Type I, Style A (Split Neutral) Cable Assembly

PLUG END

LUG END

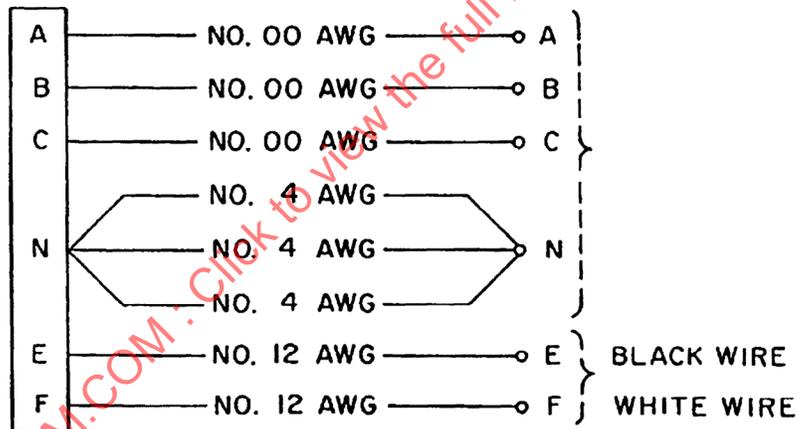


For assemblies without control leads, contacts E and F are electrically connected in the connector head using an AWG 12 (minimum) conductor.

Wiring Diagram for Type I, Style B (Split Neutral) Cable Assembly.

FIGURE 3. WIRING DIAGRAM TYPE I CABLE ASSEMBLY.

PLUG END

LUG END

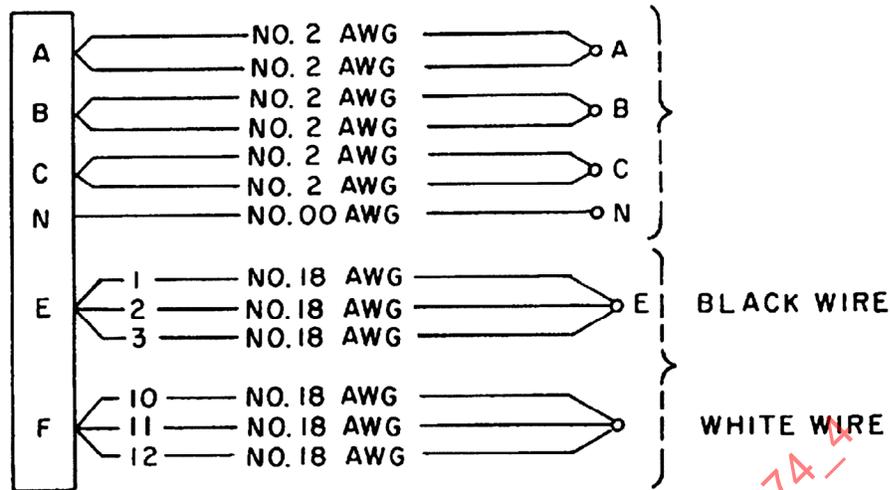

For assemblies without control leads, contacts E and F are electrically connected in the connector head using an AWG 12 (minimum) conductor.

Wiring Diagram for Type II, Style C (Split Phase) Cable Assembly

FIGURE 4. WIRING DIAGRAM TYPE II CABLE ASSEMBLY.

TABLE II. TYPE I CABLE ASSEMBLY DETAILS.  
ASSEMBLIES WITH CONTROL LEADS

PART NUMBER	WIRE SIZE			LUG TERMINALS		L FEET ±0.5	M DIA INCH (NOM)
	A, B, C	N	E AND F CONTROL	A, B, C, N	E & F CONTROL		
M7974/4A-1-20	0 AWG	3 X 6 AWG	12 AWG	MS20659-118	MS20659-106	20	1.595
M7974/4A-1-30	0 AWG	3 X 6 AWG	12 AWG	MS20659-118	MS20659-106	30	1.595
M7974-4A-1-40	0 AWG	3 X 6 AWG	12 AWG	MS20659-118	MS20659-106	40	1.595
M7974/4A-1-60	0 AWG	3 X 6 AWG	12 AWG	MS20659-118	MS20659-106	60	1.595
M7974/4A-1-80	0 AWG	3 X 6 AWG	12 AWG	MS20659-118	MS20659-106	80	1.595
M7974/4A-1-100	0 AWG	3 X 6 AWG	12 AWG	MS20659-118	MS20659-106	100	1.595
M7974/4B-1-20	00 AWG	3 X 4 AWG	12 AWG	MS20659-120	MS20659-106	20	1.865
M7974/4B-1-30	00 AWG	3 X 4 AWG	12 AWG	MS20659-120	MS20659-106	30	1.865
M7974/4B-1-40	00 AWG	3 X 4 AWG	12 AWG	MS20659-120	MS20659-106	40	1.865
M7974/4B-1-60	00 AWG	3 X 4 AWG	12 AWG	MS20659-120	MS20659-106	60	1.865
M7974/4B-1-80	00 AWG	3 X 4 AWG	12 AWG	MS20659-120	MS20659-106	80	1.865
M7974/4B-1-100	00 AWG	3 X 4 AWG	12 AWG	MS20659-120	MS20659-106	100	1.865

ASSEMBLIES WITHOUT CONTROL LEADS

PART NUMBER	WIRE SIZE		LUG TERMINALS		L FEET ±0.5	M DIA INCH (NOM)
	A, B, C	N	A, B, C, N	E & F CONTROL		
M7974/4A-2-20	0 AWG	3 X 6 AWG	MS20659-118	NO CONTROL LEADS USED	20	1.595
M7974/4A-2-30	0 AWG	3 X 6 AWG	MS20659-118		30	1.595
M7974/4A-2-40	0 AWG	3 X 6 AWG	MS20659-118		40	1.595
M7974/4A-2-60	0 AWG	3 X 6 AWG	MS20659-118		60	1.595
M7974/4A-2-80	0 AWG	3 X 6 AWG	MS20659-118		80	1.595
M7974/4A-2-100	0 AWG	3 X 6 AWG	MS20659-118		100	1.595
M7974/4B-2-20	00 AWG	3 X 4 AWG	MS20659-120	CONTACTS E AND F SHALL BE ELECTRICALLY CONNECTED WITHIN THE HEAD USING AN AWG 12 (MINIMUM) CONDUCTOR.	20	1.865
M7974/4B-2-30	00 AWG	3 X 4 AWG	MS20659-120		30	1.865
M7974/4B-2-40	00 AWG	3 X 4 AWG	MS20659-120		40	1.865
M7974/4B-2-60	00 AWG	3 X 4 AWG	MS20659-120		60	1.865
M7974/4B-2-80	00 AWG	3 X 4 AWG	MS20659-120		80	1.865
M7974/4B-2-100	00 AWG	3 X 4 AWG	MS20659-120		100	1.865

TABLE III. TYPE II CABLE ASSEMBLY DETAILS.  
ASSEMBLIES WITH CONTROL LEADS

PART NUMBER	WIRE SIZE			LUG TERMINALS		L FEET ±0.5	M DIA INCH (NOM)
	A, B, C	N	E AND F CONTROL	A, B, C, N	E & F CONTROL		
M7974/4C-1-20	2 X 2 AWG	00 AWG	3 X 18 AWG	MS20659-120	MS20659-109	20	1.980
M7974/4C-1-30	2 X 2 AWG	00 AWG	3 X 18 AWG	MS20659-120	MS20659-109	30	1.980
M7974/4C-1-40	2 X 2 AWG	00 AWG	3 X 18 AWG	MS20659-120	MS20659-109	40	1.980
M7974/4C-1-60	2 X 2 AWG	00 AWG	3 X 18 AWG	MS20659-120	MS20659-109	60	1.980
M7974/4C-1-80	2 X 2 AWG	00 AWG	3 X 18 AWG	MS20659-120	MS20659-109	80	1.980
M7974/4C-1-100	2 X 2 AWG	00 AWG	3 X 18 AWG	MS20659-120	MS20659-109	100	1.980

ASSEMBLIES WITHOUT CONTROL LEADS

PART NUMBER	WIRE SIZE		LUG TERMINALS		L FEET ±0.5	M DIA INCH (NOM)
	A, B, C	N	A, B, C, N	E & F CONTROL		
M7974/4C-2-20	2 X 2 AWG	00 AWG	MS20659-120	NO CONTROL LEADS USED	20	1.980
M7974/4C-2-30	2 X 2 AWG	00 AWG	MS20659-120		30	1.980
M7974/4C-2-40	2 X 2 AWG	00 AWG	MS20659-120		40	1.980
M7974/4C-2-60	2 X 2 AWG	00 AWG	MS20659-120		60	1.980
M7974/4C-2-80	2 X 2 AWG	00 AWG	MS20659-120		80	1.980
M7974/4C-2-100	2 X 2 AWG	00 AWG	MS20659-120		100	1.980