


NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-81582/4B, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-81582/4B, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as81582/4

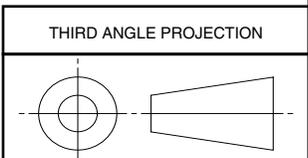

ISSUED 2004-04

CUSTODIAN: SAE AE-8/AE-8C1

PROCUREMENT SPECIFICATION: MIL-C-81582




AEROSPACE STANDARD


CONNECTOR ADAPTER, RFI SHIELDED,
CABLE TO ELECTRIC CONNECTOR

AS81582/4
SHEET 1 OF 4


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS81582/4


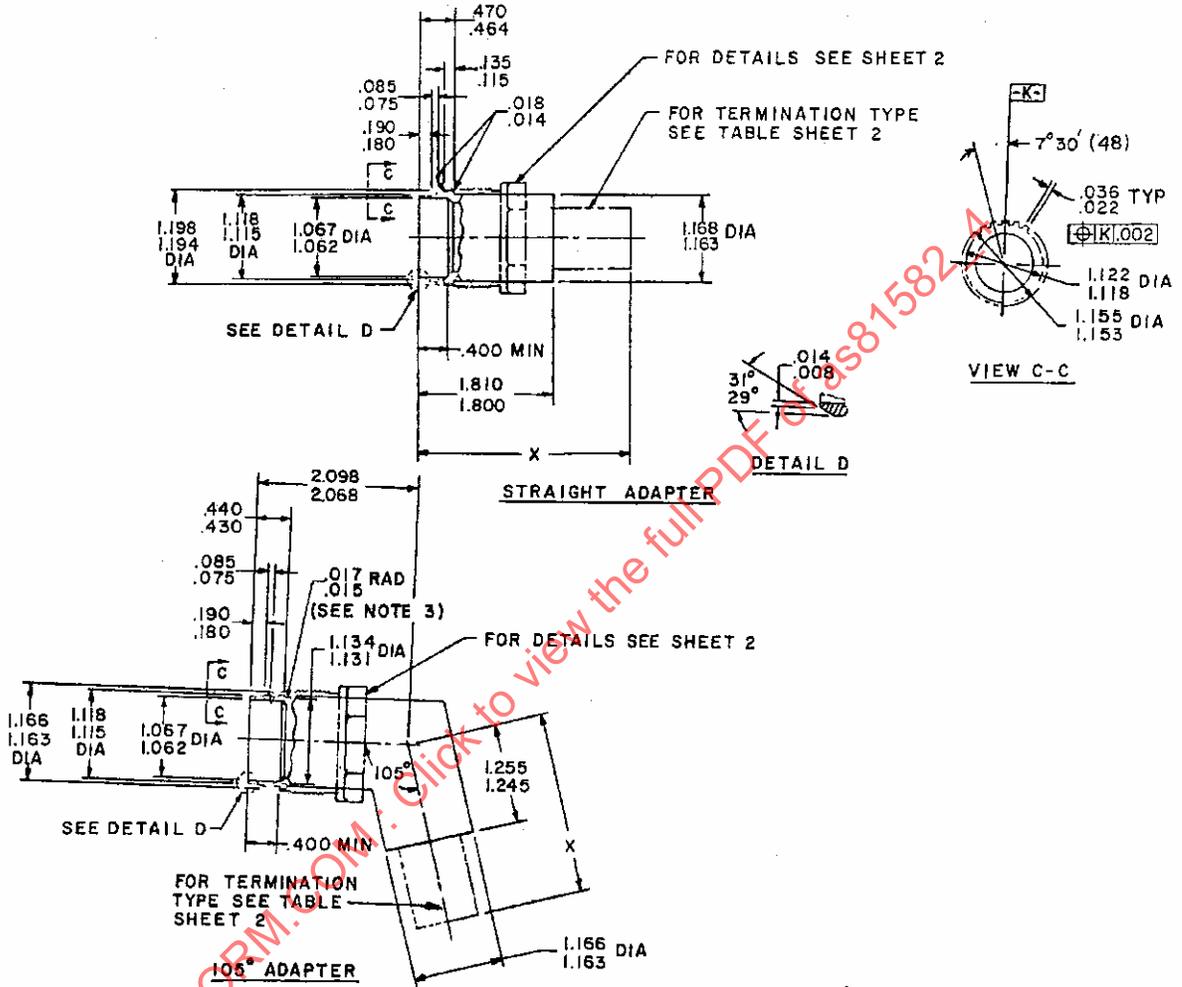


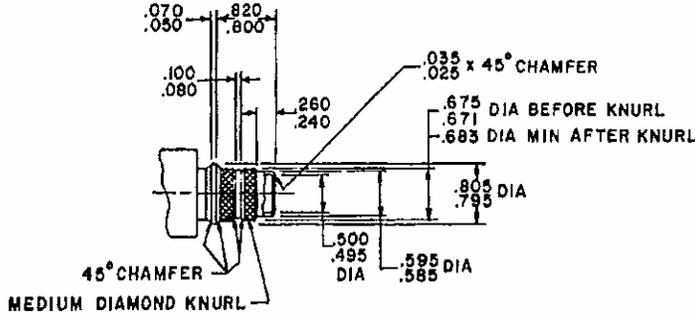

A TERMINATION FOR EMI/RFI CABLE

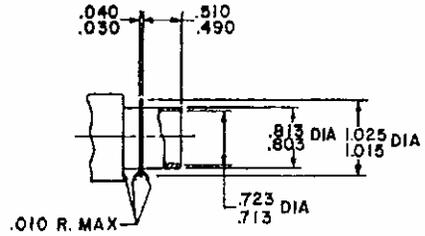

B TERMINATION FOR OPEN WIRING

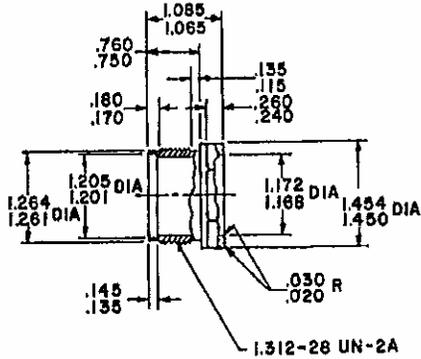

Dash No.	Configuration	Termination type	X dim.	Wt. lbs.
-1	Straight	A	2.865/2.845	0.12
-2	Straight	B	2.485/2.465	max
-3	105°	A	2.310/2.290	0.18
-4	105°	B	1.930/1.910	max

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. ALL DIMENSIONS ARE AFTER PLATING.
3. RADIUS FOR REMOVABLE RETAINER RING DIAMETER OVER RETAINER RING 1.198/1.194.
4. FOR USE WITH MIL-C-81582/2 CONNECTORS.

EXAMPLE OF PART NUMBER

M81582/04 -A 105
 BASIC PART NUMBER _____ CONFIGURATION ANGLE (LEAVE BLANK FOR STRAIGHT CONFIGURATION)
 _____ TERMINATION TYPE