


REV.  
B

AS81659™/33

RATIONALE

REVISION IS REQUIRED TO UPDATE THE CONNECTOR INSERT AND INSTALLING/REMOVAL TOOL REFERENCES.

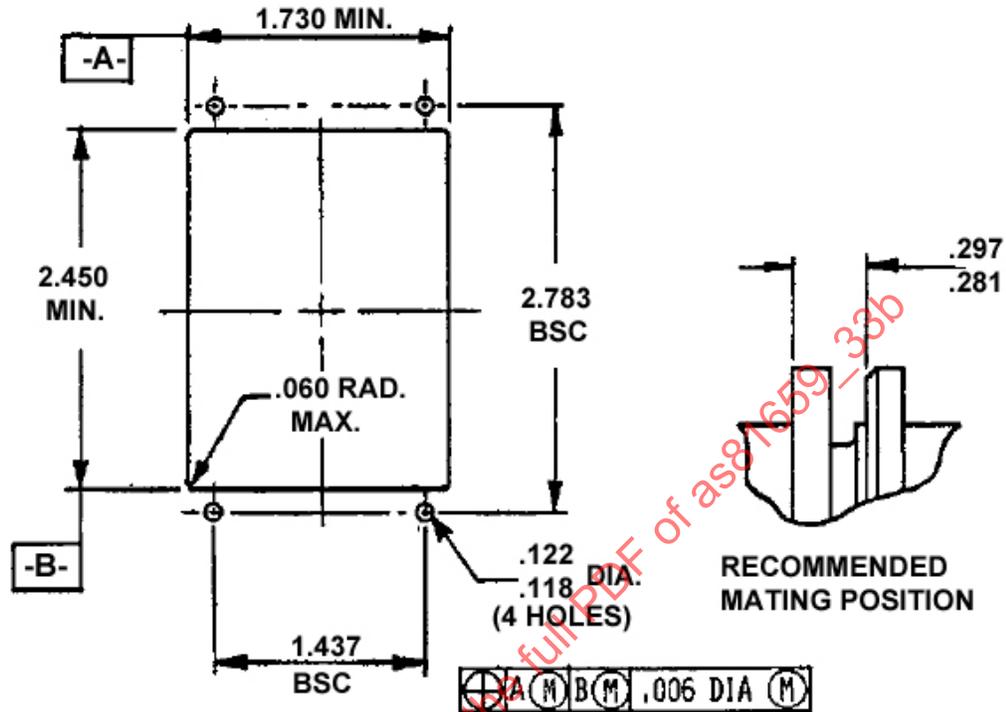


SUGGESTED PANEL CUT-OUT DIMENSIONS

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.006	.15	.125	3.18	.521	13.23	1.387	35.23	1.985	50.42
.047	1.19	.133	3.38	.541	13.74	1.3915	35.34	2.015	51.18
.060	1.52	.178	4.52	.7185	18.25	1.427	36.25	2.320	58.93
.093	2.36	.198	5.03	.885	22.48	1.437	36.50	2.440	61.98
.115	2.92	.225	5.72	.897	22.78	1.447	36.75	2.450	62.23
.117	2.97	.235	5.97	.927	23.55	1.541	39.14	2.783	70.69
.118	3.00	.281	7.14	.947	24.05	1.720	43.69	3.095	78.61
.122	3.10	.297	7.54	1.367	34.72	1.730	43.94	3.125	79.38

FIGURE 1 – CONNECTOR SUGGESTED PANEL CUTOUT/RECOMMENDED MATED POSITION

For more information on this standard, visit  
<https://www.sae.org/standards/content/AS81659/33B/>

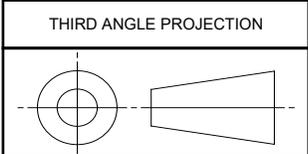

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS81659



AEROSPACE STANDARD

CONNECTORS, ELECTRICAL, RECTANGULAR, PLUG, CRIMP CONTACTS (DUAL INSERT, TYPE II, CLASS 1, (-65 °C TO +125 °C), SERIES 2, SHELL DESIGNATOR A)

AS81659™/33  
SHEET 1 OF 3

REV.  
B

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

