


REV.
A


SAE AS81659/58

RATIONALE

REVISE TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT AND INDUSTRY, REVISE DIMENSIONS, ALIGN SPECIFICATION WITH SAE GUIDELINES AND RE-WORK ILLEGIBLE DRAWINGS/TABLES, AND REVIEW SPECIFICATION FOR KNOWN TECHNICAL PROBLEMS.

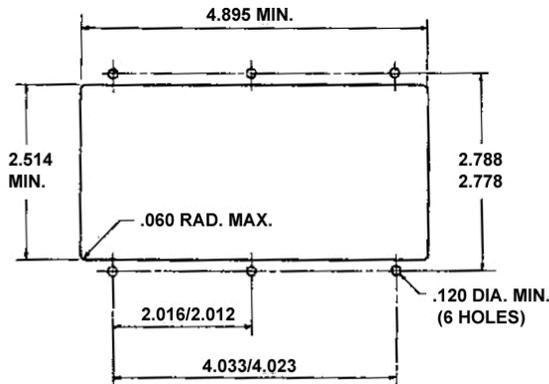

SUGGESTED PANEL CUT-OUT DIMENSIONS

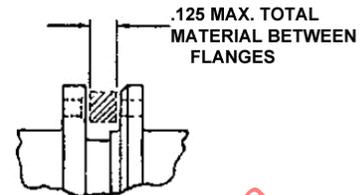


RECOMMENDED MATED POSITION

FIGURE 1 – CONNECTOR SUGGESTED PANEL CUTOUT/RECOMMENDED MATED POSITION

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.060	1.524	.885	22.479	2.016	51.206	2.786	70.764	4.895	124.333
.110	2.794	.897	22.784	2.062	52.375	2.788	70.815	5.085	129.159
.118	2.997	1.010	25.654	2.082	52.883	3.095	78.613	5.105	129.667
.120	3.048	1.030	26.162	2.490	63.246	3.125	79.375		
.125	3.175	1.165	29.591	2.494	63.348	4.023	102.184		
.140	3.556	1.200	30.480	2.514	63.856	4.033	102.438		
.225	5.715	1.450	36.830	2.778	70.561	4.850	123.190		
.235	5.969	2.012	51.105	2.782	70.663	4.875	123.825		

SAENORM.COM : Click to view the full PDF of as81659/58a

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS81659/58A>

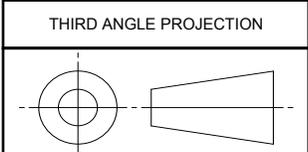

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS81659



AEROSPACE STANDARD

(R) CONNECTORS, ELECTRICAL, RECTANGULAR, PLUG ENVIRONMENT RESISTANT, CRIMP CONTACTS, QUADRUPLE INSERT, TYPE II, CLASS 2 (-65 °C TO +200 °C), SERIES 2, SHELL DESIGNATOR B

SAE AS81659/58
SHEET 1 OF 3

REV.
A

SAE Technical Standards Board provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

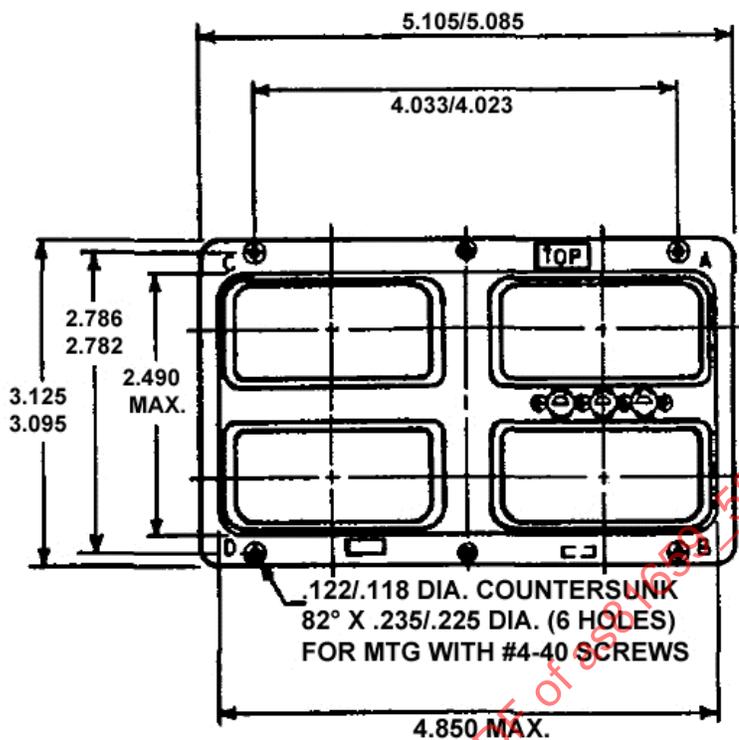


FIGURE 2 – CONNECTOR CONFIGURATIONS AND DIMENSIONS

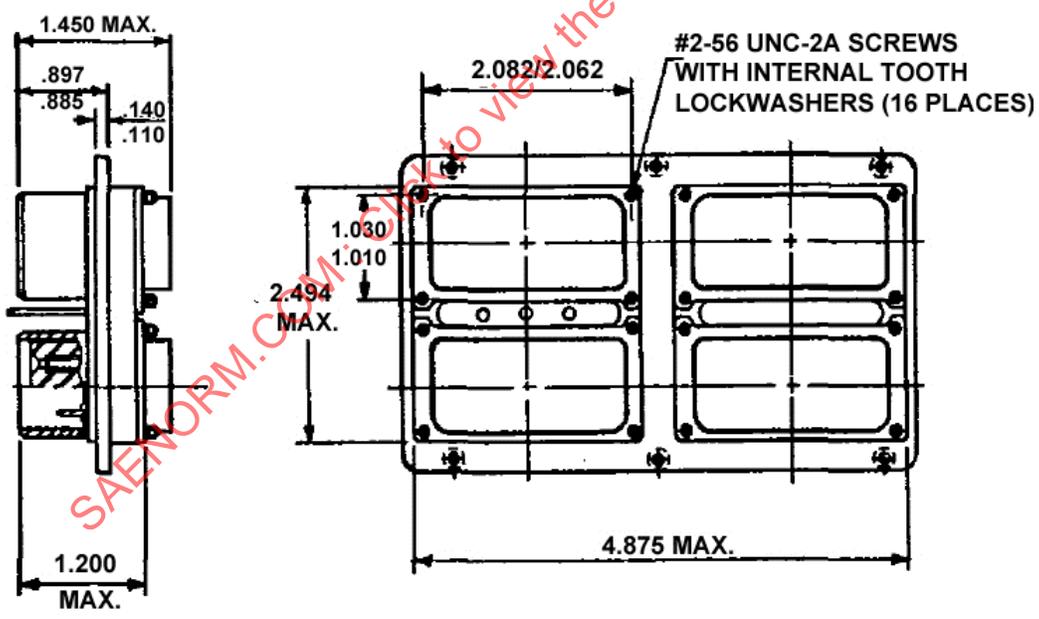


FIGURE 2 – CONNECTOR CONFIGURATIONS AND DIMENSIONS (CONTINUED)