

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF SAE AS85049.

AS85049/104

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


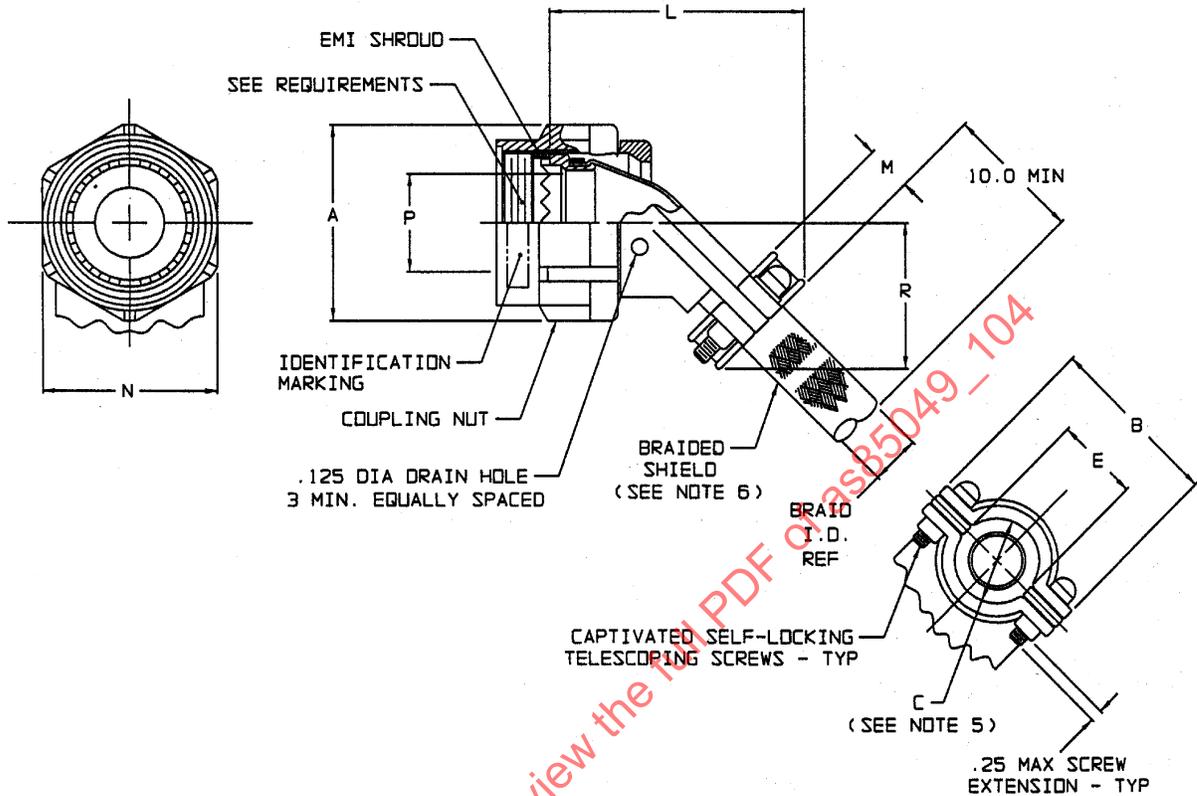


FIGURE 1 - CONFIGURATION AND DIMENSIONS

SAENORM.COM : Click to view the full PDF of AS85049_104

THIRD ANGLE PROJECTION



ISSUED 2002-06

CUSTODIAN: AE-8/AE-8C1



AEROSPACE STANDARD

CONNECTORS, ACCESSORIES, COMPOSITE,
RFI/EMI, ELECTRICAL, STRAIN RELIEF, 45°,
SELF-LOCKING, CATEGORY 3C
(FOR MIL-DTL-38999 SERIES III AND IV CONNECTORS)

AS85049/104
SHEET 1 OF 3

TABLE 1 - SHELL SIZES AND DIMENSIONS

SHELL SIZE	A MAX DIA	B MAX	C ±.031 DIA SEE NOTE 5	E MIN	L MAX	M ±.03	N HEX	P MIN	R MAX	BRAID I.D. REF	SCREW SIZE
09	.858 (21.79)	.98 (24.89)	.265 (6.73)	.229 (5.82)	1.388 (35.26)	.375 (9.53)	.750/.736 (19.05/18.69)	.264 (6.71)	.901 (22.88)	.375 (9.53)	4-40
11	.984 (24.99)	1.05 (26.67)	.310 (7.87)	.274 (6.96)	1.428 (36.27)	.375 (9.53)	.875/.860 (22.23/21.84)	.390 (9.91)	.964 (24.49)	.375 (9.53)	4-40
13	1.157 (29.39)	1.20 (30.48)	.390 (9.91)	.354 (8.99)	1.498 (38.05)	.406 (10.31)	1.000/.980 (25.40/24.89)	.504 (12.80)	1.050 (26.67)	.500 (1.27)	6-32
15	1.280 (32.51)	1.30 (33.02)	.506 (12.85)	.470 (11.94)	1.548 (39.32)	.406 (10.31)	1.125/1.100 (28.58/27.94)	.630 (16.00)	1.112 (28.24)	.500 (1.27)	6-32
17	1.406 (35.71)	1.44 (36.58)	.591 (15.01)	.555 (14.10)	1.648 (41.86)	.406 (10.31)	1.250/1.224 (31.75/31.09)	.756 (19.20)	1.175 (29.85)	.781 (19.84)	6-32
19	1.516 (38.51)	1.56 (39.62)	.661 (16.79)	.625 (15.88)	1.768 (44.91)	.406 (10.31)	1.375/1.348 (34.93/34.24)	.843 (21.41)	1.230 (31.24)	.781 (19.84)	6-32
21	1.642 (41.51)	1.69 (42.92)	.744 (18.90)	.708 (17.98)	1.808 (45.92)	.406 (10.31)	1.500/1.469 (38.10/37.31)	.969 (24.61)	1.293 (32.84)	1.000 (25.40)	6-32
23	1.768 (44.91)	1.77 (44.96)	.826 (20.98)	.790 (20.07)	1.858 (47.19)	.406 (10.31)	1.625/1.581 (41.28/40.16)	1.091 (27.71)	1.365 (34.67)	1.000 (25.40)	6-32
25	1.890 (48.01)	1.89 (48.01)	.896 (22.76)	.860 (21.84)	1.898 (48.21)	.406 (10.31)	1.750/1.690 (44.45/42.93)	1.217 (30.91)	1.417 (35.99)	1.250 (31.75)	6-32

NOTES:

- DIMENSIONS ARE IN INCHES.
- METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.
- MILLIMETERS ARE IN PARENTHESES.
- DIMENSIONS APPLY AFTER PLATING.
- CABLE ENTRY IS MEASURED WITH SADDLE BARS CLOSED AND BOTTOMED ON CLAMP EARS.
- FOR SHIELD SPLICE/TERMINATION USE AS85049/93 SPLIT SUPPORT RING.
- DETENTED SELF-LOCKING HAS A POSITIVE AUDIBLE, DETENTED COUPLING.

REQUIREMENTS:

- CONNECTOR ACCESSORY DESIGN AND CONSTRUCTION:

DIMENSIONS AND CONFIGURATIONS: SEE FIGURE 1.

- INTERFACE DIMENSIONS: IN ACCORDANCE WITH SAE AS85049, FIGURE 3.
- ACCESSORIES: CONSIST OF A COUPLING NUT, 45° CLAMP STRAIN RELIEF, BRAIDED SHIELD AND SADDLE BARS. THE COUPLING NUT SHALL BE CAPTIVATED TO THE CLAMP AND IS FREE TO ROTATE.
- CLAMP SHALL HAVE NO PROTRUSIONS OR SHARP EDGES WHICH MAY PINCH CABLE.
- MATERIAL AND FINISH: IN ACCORDANCE WITH SAE AS85049
CLAMP BODY, COUPLING AND SADDLE CLAMPS: COMPOSITE (NON-CONDUCTIVE NO FINISH)
SELF-LOCKING TELESCOPING SCREWS AND WASHERS: 300 SERIES CORROSION-RESISTANT STEEL/PASSIVATED
BRAID: 34 GAUGE WIRE, COPPER, NICKEL PLATED, 50 MICRO-INCHES MINIMUM THICKNESS
BRAID CONSTRUCTION: IN ACCORDANCE WITH MIL-DTL-27500, LETTER "N"
INTERFACE AND SHROUD: BRASS, NICKEL PLATED
BRAID RETENTION DEVICE: ALUMINUM/IRIDITE PER MIL-C-5541 OR 300 SERIES CORROSION RESISTANT STEEL/
PASSIVATED OR COPPER/TIN PLATED