

REV. C

SAE AS85049/109

FEDERAL SUPPLY CLASS
5935

RATIONALE

THIS REVISION IS REQUIRED TO INCORPORATE THE OUTSTANDING AMENDMENT, REVIEW FOR KNOWN TECHNICAL ISSUES AND UPDATE TO MEET SAE FORMAT GUIDELINES.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF SAE AS85049. SEE APPLICATION NOTE 1.


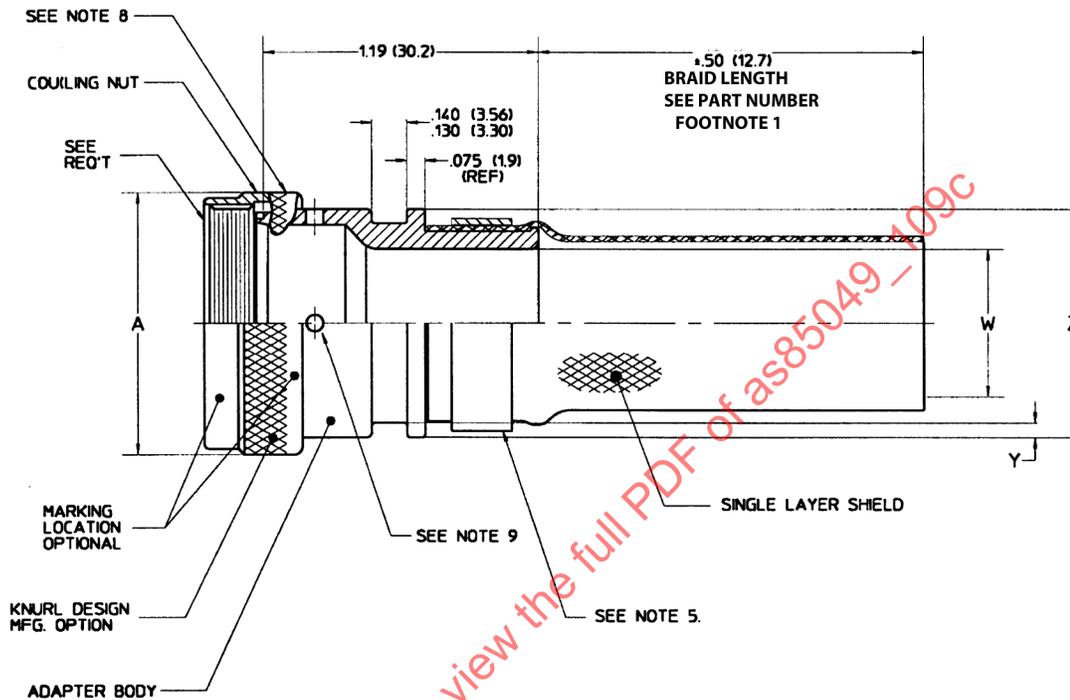


FIGURE 1- CONFIGURATION AND DIMENSIONS

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.044	1.12	.562	14.27	.829	21.06	1.157	29.39
.130	3.30	.583	14.81	.858	21.79	1.279	32.49
.140	3.56	.625	15.88	.895	22.73	1.350	34.29
.250	6.35	.684	17.37	.938	23.83	1.406	35.71
.312	7.92	.707	17.96	.957	24.30	1.516	38.51
.395	10.03	.730	18.54	.984	24.99	1.642	41.71
.438	11.13	.750	19.05	1.000	25.40	1.768	44.91
.457	11.61	.770	19.56	1.083	27.51	1.889	47.98
.500	12.70	.812	20.62	1.145	29.08	1.919	48.74

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS85049/109C>

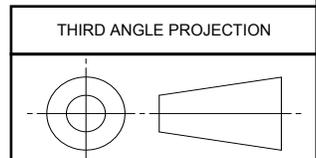

CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS85049

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
(R) CONNECTOR ACCESSORIES, ELECTRICAL BACKSHELL, STRAIGHT, NON-SELF LOCKING AND SELF LOCKING, PRE-ATTACHED SHIELD TERMINATION (RFI/EMI), BOOT ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-83723 SERIES III, AS50151 SERIES I & II, AS81703 SERIES III, AND MIL-DTL-26482 SERIES II CONNECTORS)

SAE AS85049/109
SHEET 1 OF 5

REV. C

Copyright 2011 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORP.COM : Click to view the full PDF of as85049-109c

ISSUED 2002-05 REVISED 2011-03

NOTES:

1. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1.000 in (25.40 mm).
2. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING. ACCESSORY CONFIGURATION IS OPTIONAL WITHIN THE DIMENSION ENVELOPE SPECIFIED IN FIGURE 1.
3. ADAPTER LENGTH IS MEASURED FROM THE BOTTOM OF THE ACCESSORY TEETH TO THE END OF THE ADAPTER THAT IS COVERED BY THE BRAID. THE ADAPTER SURFACE UNDER THE BRAID SHALL BE RIBBED, KNURLED, OR HAVE A SURFACE ROUGHNESS OF 125 R MINIMUM IN ACCORDANCE WITH ANSI B46.1.
4. PIG TAIL TERMINATED BRAID MATERIAL SHALL BE IN ACCORDANCE WITH TABLE 3. BRAID LENGTH IS DEFINED BY NOTE 1 AS SHOWN IN THE PART OR IDENTIFYING NUMBER (PIN).
5. TERMINATION BAND CONFIGURATION IS NOT CONTROLLED. BAND WITH BUCKLE MAY EXCEED THE "Z" DIMENSION (SEE TABLE 2) PROVIDED THE BAND DOES NOT INTERFERE WITH BOOT ATTACHMENT. BAND MATERIAL SHALL BE AS SPECIFIED IN TABLE 3.
6. CONNECTOR ACCESSORIES SPECIFIED HEREIN MAY BE USED WITH SHRINK BOOTS IN ACCORDANCE WITH SAE AS5258.
7. TERMINATION OF THE ACCESSORY SHIELD WITH HARNESS SHIELD MAY BE PERFORMED WITH AN SAE AS85049/93 SHIELD SUPPORT RING OR SIMILAR SPLIT RING ACCESSORY TYPES.
8. THREE (3) HOLES EQUALLY SPACED SHALL BE PROVIDED AND ACCOMMODATE .020 MAXIMUM SAFETY WIRE FOR THE NON-SELF-LOCKING COUPLING CONFIGURATION.
9. DRAIN HOLES WILL BE PROVIDED WITH A .125 (3.2 mm) DIAMETER, 4 PLACES EQUALLY SPACED (OPTIONAL, SEE PART NUMBER DEVELOPMENT).

TABLE 1 - SHELL SIZE AND DIMENSIONS

ACCESSORY SHELL SIZE CODE	ALLOWABLE CABLE ENTRY SIZE TABLE 2	AS81703 SERIES III SHELL SIZE (REF)	MIL-DTL-26482 SERIES II & MIL-DTL-83723 SERIES III SHELL SIZE (REF)	AS50151 SERIES I & II SHELL SIZE (REF)	A MAX DIAMETER
03	01	3	-	-	.885 (22.48)
08	01	-	8	8S	.885 (22.48)
10	01-03	-	10	10S & 10SL	1.010 (25.65)
12	01-05	7	12	12S & 12	1.135 (28.83)
14	02-06	12	14	14S & 14	1.260 (32.00)
16	04-08	19	16	16S & 16	1.385 (35.18)
18	05-09	27	18	18	1.510 (38.35)

 <p>An SAE International Group</p>	AEROSPACE STANDARD	SAE AS85049/109 SHEET 2 OF 5	REV. C
	(R) CONNECTOR ACCESSORIES, ELECTRICAL BACKSHELL, STRAIGHT, NON-SELF LOCKING AND SELF LOCKING, PRE-ATTACHED SHIELD TERMINATION (RFI/EMI), BOOT ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-83723 SERIES III, AS50151 SERIES I & II, AS81703 SERIES III, AND MIL-DTL-26482 SERIES II CONNECTORS)		

TABLE 1 - SHELL SIZE AND DIMENSIONS (CONTINUED)

ACCESSORY SHELL SIZE CODE	ALLOWABLE CABLE ENTRY SIZE TABLE 2	AS81703 SERIES III SHELL SIZE (REF)	MIL-DTL-26482 SERIES II & MIL-DTL-83723 SERIES III SHELL SIZE (REF)	AS50151 SERIES I & II SHELL SIZE (REF)	A MAX DIAMETER
20	07-11	37	20	20	1.635 (41.53)
22	09-13	-	22	22	1.760 (44.70)
24	11-14	-	24	24	1.885 (47.88)
28	14-16	-	-	28	2.135 (54.23)
32	16-17	-	-	32	2.395 (60.83)
36	17-19	-	-	36	2.635 (66.93)
40	19-21	-	-	40	2.885 (73.28)
44	21-23	-	-	44	3.135 (79.63)
48	23-25	-	-	48	3.385 (85.98)
61	12-14	61	-	-	1.885 (47.88)

TABLE 2 - CABLE ENTRY DIMENSIONS

ENTRY SIZE	W ±.020	Y +.008 -.000	Z MAX	ENTRY SIZE	W ±.020	Y +.008 -.000	Z MAX
01	.250 (6.35)	.044 (1.12)	.560 (14.22)	15	1.250 (31.75)	.069 (1.75)	1.600 (40.64)
02	.312 (7.92)	.044 (1.12)	.630 (16.00)	16	1.375 (34.93)	.069 (1.75)	1.710 (43.43)
03	.375 (9.53)	.044 (1.12)	.690 (17.53)	17	1.500 (38.10)	.086 (2.18)	1.840 (46.74)
04	.438 (11.13)	.044 (1.12)	.750 (19.05)	18	1.625 (41.28)	.086 (2.18)	2.000 (50.80)
05	.500 (12.70)	.044 (1.12)	.820 (20.83)	19	1.750 (44.45)	.086 (2.18)	2.120 (53.85)
06	.562 (14.27)	.044 (1.12)	.890 (22.61)	20	1.875 (47.63)	.086 (2.18)	2.270 (57.66)
07	.625 (15.88)	.044 (1.12)	.950 (24.13)	21	2.000 (50.80)	.086 (2.18)	2.440 (61.98)
08	.688 (17.48)	.044 (1.12)	1.020 (25.91)	22	2.125 (53.98)	.086 (2.18)	2.600 (66.04)
09	.750 (19.05)	.069 (1.75)	1.070 (27.18)	23	2.250 (57.15)	.086 (2.18)	2.750 (69.85)
10	.812 (20.62)	.069 (1.75)	1.130 (28.70)	24	2.375 (60.33)	.086 (2.18)	2.900 (73.66)
11	.875 (22.23)	.069 (1.75)	1.190 (30.23)	25	2.500 (63.50)	.086 (2.18)	3.060 (77.72)
12	.938 (23.83)	.069 (1.75)	1.260 (32.00)				
13	1.000 (25.40)	.069 (1.75)	1.320 (33.53)				
14	1.125 (28.58)	.069 (1.75)	1.470 (37.34)				

TABLE 3 - MATERIAL AND FINISH

FIGURE 1	FINISH DESCRIPTION	BASE MATERIAL	FINISH CODE
ADAPTER AND COUPLING NUT	ELECTROLESS NICKEL	ALUMINUM ALLOY	N 1/ 3/
	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL		W 4/
	NICKEL FLUOROCARBON POLYMER		X
	ZINC NICKEL		Z 4/
BAND 5/	TIN	COPPER	
BAND 5/	PASSIVATED	STAINLESS STEEL	
SHIELD 2/	NICKEL	COPPER	K 6/ 3/
SHIELD 2/	TIN	COPPER	T 6/ 3/

1/ N FINISH NOT FOR NAVY USE.

2/ BRAID SIMILAR TO A-A-59569. WIRE GAGE, NUMBER OF ENDS AND CARRIERS MAY VARY TO OBTAIN 90 PERCENT COVERAGE.

3/ N, K & T FINISH NOT FOR USE IN SPACE APPLICATIONS (SEE APPLICATION NOTE 1)

4/ W AND Z FINISH ARE NOT FOR USE IN SPACE APPLICATIONS. ALSO SEE SPECIFICATION NOTES.


5/ CHOICE OF BAND IS OPTIONAL.

6/ BRAID WIRE SHALL CONFORM TO ASTM B33 FOR FINISH "T, AND ASTM B355 CLASS 4 FOR FINISH "K".

 An SAE International Group	AEROSPACE STANDARD	SAE AS85049/109 SHEET 3 OF 5	REV. C
	(R) CONNECTOR ACCESSORIES, ELECTRICAL BACKSHELL, STRAIGHT, NON-SELF LOCKING AND SELF LOCKING, PRE-ATTACHED SHIELD TERMINATION (RFI/EMI), BOOT ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-83723 SERIES III, AS50151 SERIES I & II, AS81703 SERIES III, AND MIL-DTL-26482 SERIES II CONNECTORS)		

REQUIREMENTS:

1. CONNECTOR ACCESSORY DESIGN & CONSTRUCTION: CONSIST OF A COUPLING NUT, ADAPTER BODY, BRAIDED SHIELD, AND TERMINATION BAND. THE COUPLING NUT SHALL BE CAPTIVATED TO THE ADAPTER, AND ROTATABLE.
2. QUALIFICATION: SAE AS85049 CATEGORY 3B AND HEREIN.
3. DIMENSION AND CONFIGURATION: SEE FIGURE 1, TABLE 1 AND 2.
4. INTERFACE DIMENSIONS: SEE SAE AS85049 FIGURE 4 OR 4A.
5. COUPLING NUT: CAPTIVATED TO ADAPTER BODY, FREE TO ROTATE, AND SELF LOCKING OR NON-SELF LOCKING
6. ADDITIONAL QUALIFICATION TESTS: THE FOLLOWING TESTS SHALL BE PERFORMED ON AN UNTESTED SMALL, MEDIUM, AND LARGE ACCESSORY:
 - A. BRAID COVERAGE: THE BRAID COVERAGE SHALL BE 90 PERCENT MINIMUM. TEST DATA RECEIVED FROM THE BRAID MANUFACTURER MAY BE USED FOR QUALIFICATION DATA.
 - B. BRAID RETENTION: WITH ACCESSORY CLAMPED, PULL THE BRAID AT A RATE OF 1 IN PER MINUTE TO A MINIMUM FORCE OF 100 LBS FOR BRAID DIAMETERS .50 IN AND UNDER AND 150 LBS FOR BRAID OVER .50 IN. THE BRAID SHALL NOT PULL OUT. BAND SLIPPAGE SHALL NOT EXCEED .025 IN WHEN MEASURED FROM A FIX POINT ON THE ADAPTER. BRAID BREAKAGE DUE TO TENSILE LOAD WILL NOT BE VIEWED AS A FAILURE.
 - C. THERMAL AGING: THERMALLY EXPOSE THE ACCESSORY TO 150 DEGREES CENTIGRADE FOR 168 HOURS FOLLOWED BY ELECTRICAL RESISTANCE AT ROOM TEMPERATURE. MEASURE THE ELECTRICAL RESISTANCE OF THE ACCESSORY AT ROOM TEMPERATURE. THE APPLIED CURRENT SHALL BE 0.100 AMPS \pm 0.010 AMPS AT A MAXIMUM OF 1.50 DC VOLTS. THE MEASUREMENT SHALL BE TAKEN FROM A POINT ON THE BRAID, WITHIN 1.0 IN \pm 0.50 IN BEYOND THE END OF THE ADAPTER AND A POINT ON THE ADAPTER AT THE OPPOSITE SIDE OF THE BAND. THE ELECTRICAL RESISTANCE SHALL NOT EXCEED 1 M Ω .
7. PART NUMBER: SEE EXAMPLE BELOW:

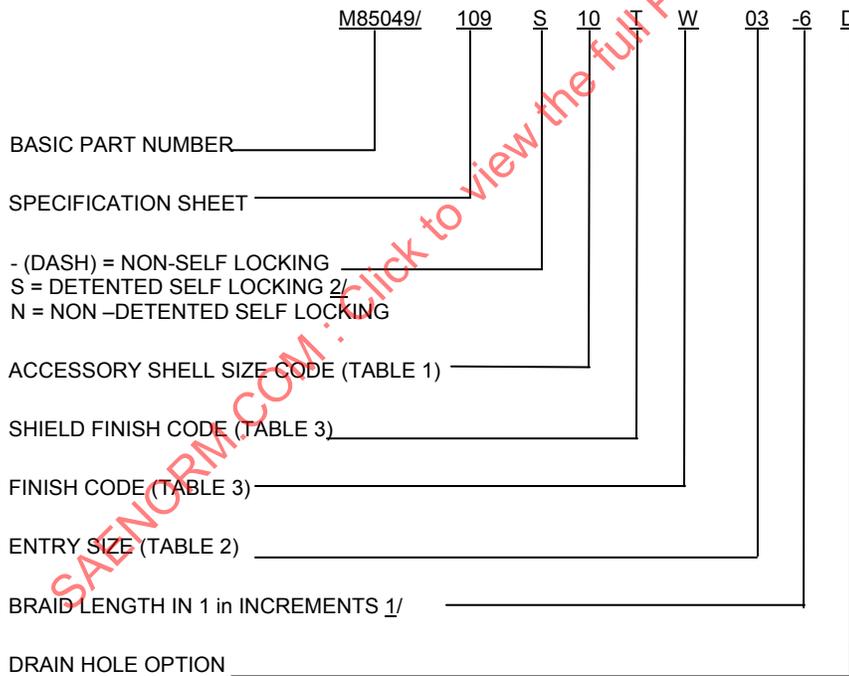

^{1/} BRAID LENGTH SHALL BE A MINIMUM OF 6 IN THEN INCREASE IN 1 IN INCREMENTS (7 = 7 IN, 8 = IN, ETC.) UP TO A MAXIMUM OF 18 IN.

^{2/} "DETENTED SELF LOCKING" COUPLING NUTS PROVIDE A POSITIVE AUDIBLE DETENT.

 An SAE International Group	AEROSPACE STANDARD	SAE AS85049/109 SHEET 4 OF 5	REV. C
	(R) CONNECTOR ACCESSORIES, ELECTRICAL BACKSHELL, STRAIGHT, NON-SELF LOCKING AND SELF LOCKING, PRE-ATTACHED SHIELD TERMINATION (RFI/EMI), BOOT ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-83723 SERIES III, AS50151 SERIES I & II, AS81703 SERIES III, AND MIL-DTL-26482 SERIES II CONNECTORS)		