

REV.  
B

AS85049/111

FEDERAL SUPPLY CLASS  
5935

RATIONALE

REVISE TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT AND INDUSTRY. REMOVE GOVERNMENT JARGON AS A RESULT OF THE WORD-FOR-WORD CONVERSION. UPDATE SPECIFICATION REFERENCES.

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS85049.


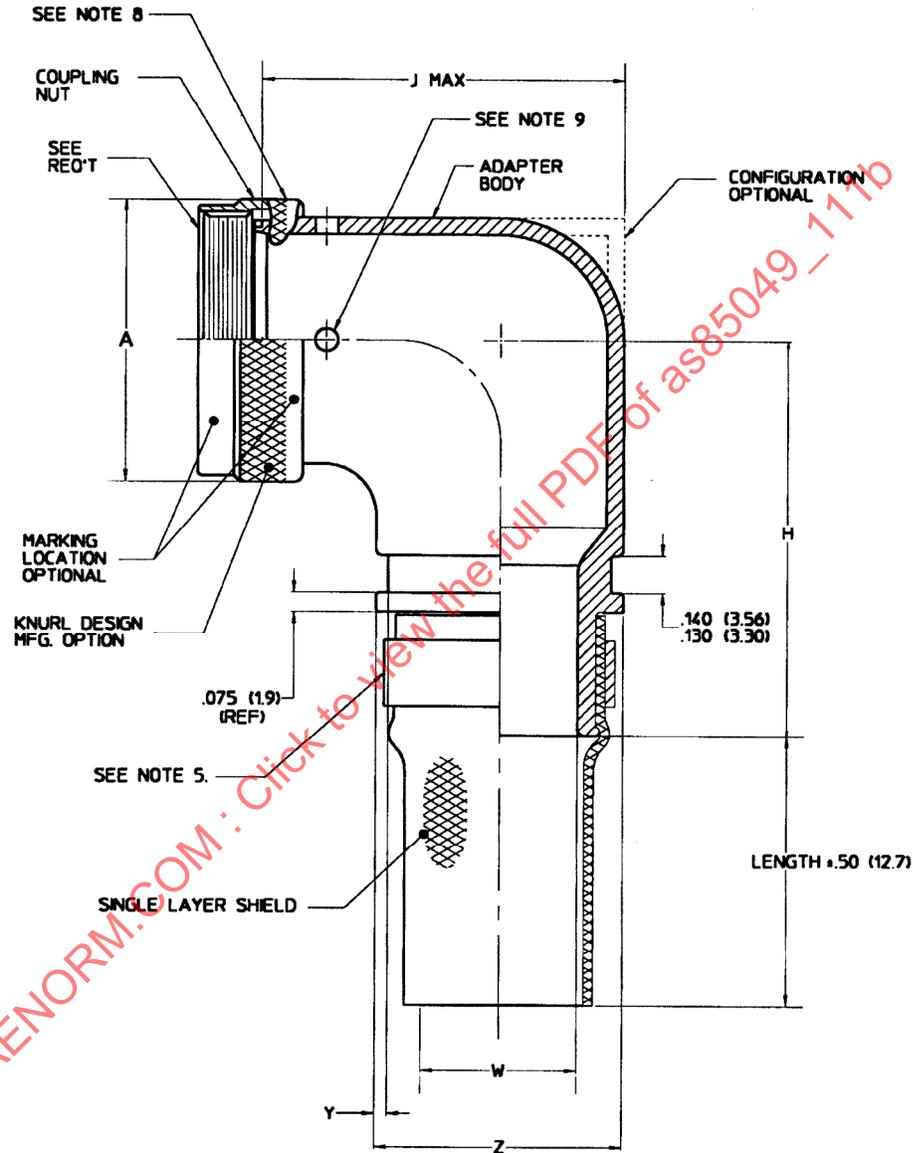


FIGURE 1 - CONFIGURATION AND DIMENSIONS

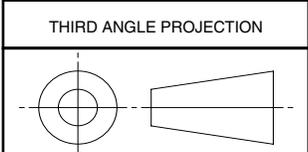

CUSTODIAN: SAE AE-8/AE-8C1

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

(R) CONNECTOR ACCESSORIES, ELECTRICAL BACKSHELL, 90 DEGREE, SELF LOCKING AND NON-SELF LOCKING, PRE-ATTACHED SHIELD TERMINATION (RFI/EMI), BOOT ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-83723 SERIES III, MIL-DTL-5015 (SERIES I & II), AS81703 SERIES III, AND MIL-DTL-26482 SERIES II CONNECTORS)

**AS85049/111**  
SHEET 1 OF 5

**REV. B**

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)  
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2002-05 REVISED 2007-06

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.044	1.12	.562	14.27	.829	21.06	1.157	29.39
.130	3.30	.583	14.81	.858	21.79	1.279	32.49
.140	3.56	.625	15.88	.895	22.73	1.350	34.29
.250	6.35	.684	17.37	.938	23.83	1.406	35.71
.312	7.92	.707	17.96	.957	24.30	1.516	38.51
.395	10.03	.730	18.54	.984	24.99	1.642	41.71
.438	11.13	.750	19.05	1.000	25.40	1.768	44.91
.457	11.61	.770	19.56	1.083	27.51	1.889	47.98
.500	12.70	.812	20.62	1.145	29.08	1.919	48.74

## NOTES:

## NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

- METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1.000 in (25.40 mm).
- DIMENSIONS ARE IN INCHES, AND APPLY AFTER PLATING. ACCESSORY CONFIGURATION IS OPTIONAL WITHIN THE DIMENSION ENVELOPE SPECIFIED IN FIGURE 1.
- ADAPTER LENGTH IS MEASURED FROM THE BOTTOM OF THE ACCESSORY TEETH TO THE END OF THE ELBOW. THE ADAPTER SURFACE UNDER THE BRAID SHALL BE RIBBED, KNURLED, OR HAVE A SURFACE ROUGHNESS OF 125 R MINIMUM IN ACCORDANCE WITH ANSI B46.1.
- PIG TAIL TERMINATED BRAID MATERIAL SHALL BE IN ACCORDANCE WITH TABLE 3. BRAID LENGTH IS DEFINED BY NOTE 1 AS SHOWN IN THE PART OR IDENTIFYING NUMBER (PIN).
- TERMINATION BAND CONFIGURATION IS NOT CONTROLLED. BAND WITH BUCKLE MAY EXCEED THE "Z" DIMENSION (SEE TABLE 2) PROVIDED THE BAND DOES NOT INTERFERE WITH BOOT ATTACHMENT. BAND MATERIAL SHALL BE AS SPECIFIED IN TABLE 3.
- CONNECTOR ACCESSORIES SPECIFIED HEREIN MAY BE USED WITH SHRINK BOOTS IN ACCORDANCE WITH SAE AS5258.
- TERMINATION OF THE ACCESSORY SHIELD WITH HARNESS SHIELD MAY BE PERFORMED WITH AN AS85049/93 SHIELD SUPPORT RING OR SIMILAR SPLIT RING ACCESSORY TYPES.
- THREE (3) HOLES EQUALLY SPACED SHALL BE PROVIDED AND ACCOMMODATE .020 MAXIMUM SAFETY WIRE FOR THE NON-SELF-LOCKING COUPLING CONFIGURATION.
- DRAIN HOLES WILL BE PROVIDED WITH A .125 (3.2 mm) DIAMETER, 4 PLACES EQUALLY SPACED (OPTIONAL, SEE PART NUMBER DEVELOPMENT).
- THE CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT.

TABLE 1 - SHELL SIZE AND DIMENSION

ACCESSORY SHELL SIZE CODE	ALLOWABLE CABLE ENTRY SIZE TABLE 2	AS81703 SERIES III SHELL SIZE (REF)	MIL-DTL-26482 SERIES II & MIL-DTL-83723 SERIES III SHELL SIZE (REF)	MIL-DTL-5015 SERIES I & II SHELL SIZE (REF)	A MAX DIAMETER	H MAX	J MAX
03	01	3	-	-	0.885	1.730	1.120
08	01	-	8	8S	0.885	1.730	1.120
10	01-03	-	10	10S & 10SL	1.010	1.850	1.250
12	01-05	7	12	12S & 12	1.135	1.870	1.380
14	02-06	12	14	14S & 14	1.260	1.940	1.440
16	04-08	19	16	16S & 16	1.385	2.030	1.560
18	05-09	27	18	18	1.510	2.200	1.750
20	07-11	37	20	20	1.635	2.200	1.750

TABLE 1 - SHELL SIZE AND DIMENSION (CONTINUED)

ACCESSORY SHELL SIZE CODE	ALLOWABLE CABLE ENTRY SIZE TABLE 2	AS81703 SERIES III SHELL SIZE (REF)	MIL-DTL-26482 SERIES II & MIL-DTL-83723 SERIES III SHELL SIZE (REF)	MIL-DTL-5015 SERIES I & II SHELL SIZE (REF)	A MAX DIAMETER	H MAX	J MAX
22	09-13	-	22	22	1.760	2.310	2.000
24	11-14	-	24	24	1.885	2.310	2.000
28	14-16	-	-	28	2.135	2.480	2.250
32	16-17	-	-	32	2.395	2.730	2.750
36	17-19	-	-	36	2.635	2.730	3.125
40	19-21	-	-	40	2.885	2.880	4.125
44	21-23	-	-	44	3.135	3.000	4.125
48	23-25	-	-	48	3.385	3.120	4.125
61	12-14	61	-	-	1.885	2.380	2.250

TABLE 2 - CABLE ENTRY DIMENSIONS

ENTRY SIZE	W ±.020	Y +.008 -.000	Z MAX
01	.250	.044	.560
02	.312	.044	.630
03	.375	.044	.690
04	.438	.044	.750
05	.500	.044	.820
06	.562	.044	.890
07	.625	.044	.950
08	.688	.044	1.020
09	.750	.069	1.120
10	.812	.069	1.200
11	.875	.069	1.270
12	.938	.069	1.260
13	1.000	.069	1.370
14	1.125	.069	1.470

ENTRY SIZE	W ±.020	Y +.008 -.000	Z MAX
15	1.250	.069	1.600
16	1.375	.069	1.710
17	1.500	.086	1.840
18	1.625	.086	2.000
19	1.750	.086	2.120
20	1.875	.086	2.270
21	2.000	.086	2.440
22	2.125	.086	2.600
23	2.250	.086	2.750
24	2.375	.086	2.900
25	2.500	.086	3.060

TABLE 3 - MATERIAL AND FINISH

FIGURE 1	FINISH DESCRIPTION	BASE MATERIAL	FINISH CODE
ADAPTER & COUPLING NUT	ELECTROLESS NICKEL	ALUMINUM ALLOY	N <u>1/</u>
	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL		W <u>3/</u>
BAND <u>4/</u>	TIN	COPPER	
BAND <u>4/</u>	PASSIVATED	STAINLESS STEEL	
SHIELD <u>5/</u>	NICKEL	COPPER	K <u>5/</u>
SHIELD <u>2/</u>	TIN	COPPER	T <u>5/</u>

1/ NOT FOR NAVY USE. AIR FORCE USE IS FOR SPACE APPLICATIONS ONLY. W IS THE PREFERRED FINISH.  
2/ BRAID SIMILAR TO A-A-59569. WIRE GAGE, NUMBER OF ENDS AND CARRIERS MAY VARY TO OBTAIN 90% COVERAGE.  
3/ NOT FOR USE IN SPACE APPLICATIONS.  
4/ CHOICE OF BAND IS OPTIONAL.  
5/ BRAID WIRE SHALL CONFORM TO ASTM B 33 FOR FINISH 'T' AND ASTM B 355, CLASS 4 FOR FINISH 'K'.

## REQUIREMENTS:

1. CONNECTOR ACCESSORY DESIGN & CONSTRUCTION: CONSIST OF A COUPLING NUT, ADAPTER BODY, BRAIDED SHIELD, AND TERMINATION BAND. THE COUPLING NUT SHALL BE CAPTIVATED TO THE ADAPTER, AND ROTATABL.
2. QUALIFICATION: AS85049 CATEGORY 3B AND HEREIN.
3. DIMENSION AND CONFIGURATION: SEE FIGURE 1, TABLE 1, AND TABLE 2.
4. INTERFACE DIMENSIONS: SEE AS85049 FIGURE 4 or 4A.
5. COUPLING NUT: CAPTIVATED TO ADAPTER BODY, FREE TO ROTATE, AND SELF LOCKING OR NON-SELF LOCKING
6. ADDITIONAL QUALIFICATION TESTS: THE FOLLOWING TESTS SHALL BE PERFORMED ON AN UNTESTED SMALL, MEDIUM, AND LARGE ACCESSORY:
  - a. BRAID COVERAGE: THE BRAID COVERAGE SHALL BE 90 PERCENT MINIMUM. TEST DATA RECEIVED FROM THE BRAID MANUFACTURER MAY BE USED FOR QUALIFICATION DATA.
  - b. BRAID RETENTION: WITH ACCESSORY SUITABLY CLAMPED, PULL THE BRAID AT A RATE OF 1 in PER MINUTE TO A MINIMUM FORCE OF 100 lb FOR BRAID DIAMETERS .50 in AND UNDER AND 150 lb FOR BRAID OVER .50 in. THE BRAID SHALL NOT PULL OUT. BAND SLIPPAGE SHALL NOT EXCEED .025 in WHEN MEASURED FROM A FIX POINT ON THE ADAPTER. BRAID BREAKAGE DUE TO TENSILE LOAD WILL NOT BE VIEWED AS A FAILURE.
  - c. THERMAL AGING: THERMALLY EXPOSE THE ACCESSORY TO 150 DEGREES CENTIGRADE FOR 168 h FOLLOWED BY ELECTRICAL RESISTANCE AT ROOM TEMPERATURE. MEASURE THE ELECTRICAL RESISTANCE OF THE ACCESSORY AT ROOM TEMPERATURE. THE APPLIED CURRENT SHALL BE 0.100 AMPS  $\pm$  0.010 AMPS AT A MAXIMUM OF 1.50 DC VOLTS. THE MEASUREMENT SHALL BE TAKEN FROM A POINT ON THE BRAID, WITHIN 1.0 in  $\pm$  0.50 in BEYOND THE END OF THE ADAPTER AND A POINT ON THE ADAPTER AT THE OPPOSITE SIDE OF THE BAND. THE ELECTRICAL RESISTANCE SHALL NOT EXCEED 1 m $\Omega$ .